

EXHIBIT B

(12) **United States Patent**
Jones et al.

(10) **Patent No.:** **US 11,213,601 B2**
(45) **Date of Patent:** **Jan. 4, 2022**

(54) **FRAGRANCE INTENSITY CONTROL MECHANISM WITH PID CONTROL**

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,732,148 A 1/1956 Lummis
3,195,581 A 7/1965 Brosseit
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1313163 A 9/2001
CN 101528274 A 9/2009
(Continued)

OTHER PUBLICATIONS

Extended European Search Report of Application No. EP16862913.7 dated Jun. 26, 2019 (13 pages).

(Continued)

(71) Applicant: **Pura Scents, Inc.**, Orem, UT (US)

(72) Inventors: **Brian Aaron Jones**, Orem, UT (US);
Bruno Miranda Lima, Orem, UT (US); **Richard Nathaniel Stapler, III**,
Orem, UT (US); **Zachary Dennis Blume**, Orem, UT (US)

(73) Assignee: **Pura Scents, Inc.**, Pleasant Grove, UT (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/878,355**

(22) Filed: **May 19, 2020**

(65) **Prior Publication Data**

US 2020/0276348 A1 Sep. 3, 2020

Related U.S. Application Data

(63) Continuation of application No. 15/626,007, filed on Jun. 16, 2017, now Pat. No. 10,967,091, which is a (Continued)

(51) **Int. Cl.**

A61L 9/03 (2006.01)

H05B 1/02 (2006.01)

H05B 3/14 (2006.01)

(52) **U.S. Cl.**

CPC **A61L 9/037** (2013.01); **A61L 9/035** (2013.01); **H05B 1/0252** (2013.01); **H05B 3/141** (2013.01);

(Continued)

(58) **Field of Classification Search**

None

See application file for complete search history.

Primary Examiner — Thor S Campbell


(74) *Attorney, Agent, or Firm* — VLP Law Group, LLP; Michel Bohn

(57)

ABSTRACT

A scent dispenser may comprise a vial retaining mechanism, a heating element, vial sensor, and a controller. The vial retaining mechanism includes a vial coupling that removeably retains a vial containing a scented solution. The includes a wick extending from a cavity of the vial through an opening of a neck of the vial. The heating element is shaped to receive and heat the wick of the vial. The vial sensor includes an array of sensor pads that are arranged in alignment with the vial retained by the vial coupling. The controller is electrically coupled to the heating element and electrically coupled to the array of sensor pads. The controller regulates a temperature level of the heating element, and receives signals from the array of sensor pads and processing the signals to determine a fluid level of the vial.

20 Claims, 52 Drawing Sheets

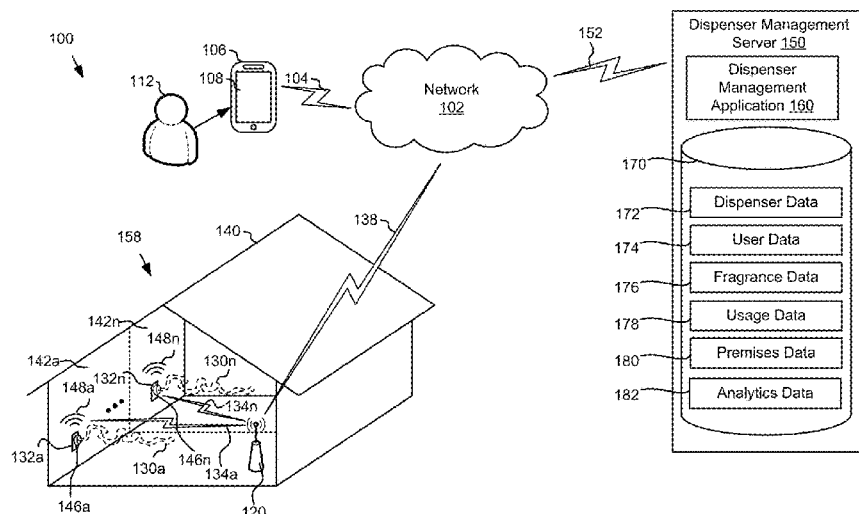

US 11,213,601 B2

Page 2

Related U.S. Application Data

continuation of application No. 15/342,065, filed on Nov. 2, 2016, now Pat. No. 9,827,343.		4,986,420 A	1/1991	Gunn et al.	
		5,000,356 A	3/1991	Johnson et al.	
		5,009,828 A	4/1991	McCree	
		5,027,465 A	7/1991	McKay	
		5,050,103 A	9/1991	Schiller et al.	
		5,059,282 A	10/1991	Ampulski et al.	
		5,063,062 A	11/1991	Greenspan et al.	
		5,073,235 A	12/1991	Trokhan	
		5,094,761 A	3/1992	Trinh et al.	
		5,111,477 A *	5/1992	Muderlak	H05B 1/0225 392/390
		5,156,834 A	10/1992	Beckmeyer et al.	
		5,175,791 A *	12/1992	Muderlak	A61L 9/03 219/492
		5,191,525 A	3/1993	LeBrun et al.	
		5,237,816 A *	8/1993	Duffy	F01K 23/108 60/39.182
		5,259,062 A *	11/1993	Pelonis	F24F 5/0017 392/365
		5,297,725 A	3/1994	Sutherland	
		5,376,006 A	12/1994	Fischer	
		5,511,122 A	4/1996	Atkinson	
		5,535,474 A	7/1996	Salazar	
		5,541,170 A	7/1996	Rhodes et al.	
		5,583,122 A	12/1996	Benedict et al.	
		5,620,965 A	4/1997	Blank	
		5,652,228 A	7/1997	Bissett	
		5,687,259 A	11/1997	Linford	
		5,687,485 A	11/1997	Shurtleff et al.	
		5,721,005 A	2/1998	Gutwein et al.	
		5,735,011 A	4/1998	Asher	
		5,746,598 A	5/1998	Fischer	
		5,761,814 A	6/1998	Anderson et al.	
		5,783,544 A	7/1998	Trinh et al.	
		5,849,728 A	12/1998	Bissett	
		5,872,112 A	2/1999	Blank	
		5,891,453 A	4/1999	Sagel et al.	
		5,894,017 A	4/1999	Sagel et al.	
		D411,456 S	6/1999	Mast et al.	
		5,922,307 A	7/1999	Montgomery	
		5,924,597 A	7/1999	Lynn	
		5,926,897 A	7/1999	Volpenhein	
		5,930,474 A	7/1999	Dunworth et al.	
		5,956,848 A	9/1999	Tseng et al.	
		5,956,851 A	9/1999	Apprille et al.	
		5,989,569 A	11/1999	Dirksing et al.	
		5,997,890 A	12/1999	Sine et al.	
		6,026,532 A	2/2000	Catanzaro	
		6,041,926 A	3/2000	Petricca et al.	
		6,045,811 A	4/2000	Dirksing et al.	
		6,052,903 A	4/2000	Metcalf et al.	
		6,067,525 A	5/2000	Johnson et al.	
		6,077,318 A	6/2000	Trinh et al.	
		6,096,342 A	8/2000	Dansereau et al.	
		6,118,248 A	9/2000	Gartstein et al.	
		6,126,980 A	10/2000	Smith et al.	
		6,165,513 A	12/2000	Dansereau et al.	
		6,185,822 B1	2/2001	Tseng et al.	
		6,202,150 B1	3/2001	Young et al.	
		6,212,777 B1	4/2001	Gilder et al.	
		6,232,523 B1	5/2001	Tan et al.	
		6,235,968 B1	5/2001	Tan et al.	
		6,248,135 B1	6/2001	Trinh et al.	
		6,248,390 B1	6/2001	Stillman	
		6,251,384 B1	6/2001	Tan et al.	
		6,254,065 B1	7/2001	Ehrensperger et al.	
		6,265,008 B1	7/2001	Smith et al.	
		6,266,674 B1	7/2001	Hejna, Jr.	
		6,278,455 B1	8/2001	Baker	
		6,284,007 B1	9/2001	Tao	
		6,308,359 B2	10/2001	Fritsch et al.	
		6,326,040 B1	12/2001	Kearney et al.	
		6,331,292 B1	12/2001	Montgomery	
		6,367,108 B1	4/2002	Fritsch et al.	
		6,457,969 B1	10/2002	Khosla	
		6,487,367 B2 *	11/2002	Vieira	A01M 1/2077 392/392
		6,490,920 B1 *	12/2002	Netzer	G01C 9/06 324/687
(60)	Provisional application No. 62/249,917, filed on Nov. 2, 2015, provisional application No. 62/278,894, filed on Jan. 14, 2016, provisional application No. 62/278,913, filed on Jan. 14, 2016, provisional application No. 62/279,005, filed on Jan. 15, 2016, provisional application No. 62/279,316, filed on Jan. 15, 2016, provisional application No. 62/279,508, filed on Jan. 15, 2016, provisional application No. 62/279,698, filed on Jan. 16, 2016, provisional application No. 62/279,745, filed on Jan. 16, 2016, provisional application No. 62/279,747, filed on Jan. 16, 2016, provisional application No. 62/279,748, filed on Jan. 16, 2016, provisional application No. 62/279,766, filed on Jan. 17, 2016, provisional application No. 62/279,767, filed on Jan. 17, 2016.				
(52)	U.S. Cl. CPC <i>A61L 2209/111</i> (2013.01); <i>A61L 2209/12</i> (2013.01); <i>A61L 2209/135</i> (2013.01); <i>H05B 2203/021</i> (2013.01)				
(56)	References Cited U.S. PATENT DOCUMENTS 3,645,493 A 2/1972 Manoogian et al. 3,786,995 A 1/1974 Manoogian et al. 3,876,498 A 4/1975 Justus 3,923,593 A 12/1975 Verseput 4,043,359 A 8/1977 Christo 4,128,357 A 12/1978 Barth et al. 4,142,415 A * 3/1979 Jung G01F 23/263 73/304 C 4,218,785 A 8/1980 Crawford et al. 4,331,289 A 5/1982 Killy 4,396,143 A 8/1983 Killy 4,483,769 A 11/1984 Sherman 4,490,075 A 12/1984 Risi et al. 4,523,604 A 6/1985 Hutto 4,530,497 A 7/1985 Moran et al. 4,544,305 A 10/1985 Hair 4,557,720 A 12/1985 Hemphill 4,562,960 A 1/1986 Marty et al. 4,563,937 A 1/1986 White 4,577,653 A 3/1986 Marty 4,583,341 A 4/1986 Barth et al. 4,586,255 A 5/1986 Jacobson 4,593,430 A 6/1986 Spangler et al. 4,601,148 A 7/1986 Risi et al. 4,624,051 A 11/1986 Apprille et al. 4,696,322 A 9/1987 Knapp et al. 4,703,875 A 11/1987 Malek 4,707,592 A 11/1987 Ware 4,722,847 A 2/1988 Heckert 4,765,365 A 8/1988 Roland 4,767,547 A 8/1988 Straathof et al. 4,802,255 A 2/1989 Breuer et al. 4,807,401 A 2/1989 Atwater 4,834,575 A 5/1989 Barth et al. 4,837,613 A 6/1989 Paxton et al. 4,864,898 A 9/1989 Tricinella 4,869,928 A 9/1989 Kurumatani et al. 4,885,155 A 12/1989 Parran et al. 4,905,337 A 3/1990 McKay 4,916,817 A 4/1990 Atwater 4,929,351 A 5/1990 Sanborn 4,949,600 A 8/1990 Tricinella 4,969,996 A 11/1990 Hankammer 4,981,239 A 1/1991 Cappel et al.				

Page 3

(56)	References Cited				2004/0204043	A1 *	10/2004	Wang	G06F 1/1616 455/556.1
	U.S. PATENT DOCUMENTS				2004/0247300	A1 *	12/2004	He	A61L 9/03 392/390
	6,497,735	B2	12/2002	Tao	2005/0167860	A1 *	8/2005	Brooks	A61L 9/125 261/81
	6,522,834	B1 *	2/2003	Herrick	H05B 3/60 222/251				
	6,579,516	B1	6/2003	Mansouri	2005/0185398	A1	8/2005	Scannell	
	D487,660	S	3/2004	Sayers et al.	2005/0205916	A1 *	9/2005	Conway	A61L 9/127 257/299
	6,712,287	B1 *	3/2004	Le Pesant	2005/0226788	A1 *	10/2005	Hrybyk	A61L 9/122 422/124
	6,783,117	B2 *	8/2004	Wohrle	2006/0001714	A1 *	1/2006	Usui	G01F 23/2967 347/86
	6,950,607	B2 *	9/2005	Yip	2006/0193611	A1 *	8/2006	Ruiz Ballesteros	A61L 9/035 392/394
	7,131,603	B2	11/2006	Sakaida et al.	2006/0219962	A1 *	10/2006	Dancs	A61L 9/127 250/577
	7,152,809	B2 *	12/2006	Ketcha	A01M 1/205 239/13				
	7,164,849	B1	1/2007	Bankers et al.	2007/0014549	A1	1/2007	Demarest et al.	
	7,188,100	B2	3/2007	De Bellis et al.	2007/0036673	A1	2/2007	Selander	
	7,389,943	B2 *	6/2008	Jaworski	2007/0058955	A1 *	3/2007	Bankers	G01F 23/22 392/386
	RE40,464	E *	8/2008	Vieira	2007/0235555	A1	10/2007	Helf et al.	
	7,469,844	B2 *	12/2008	Conway	2008/0013932	A1 *	1/2008	He	A01M 1/2072 392/390
	D584,809	S *	1/2009	Porchia	2008/0050102	A1 *	2/2008	Lamers	A61L 9/03 392/386
	7,493,028	B2 *	2/2009	DeWitt	2008/0056691	A1 *	3/2008	Wingo	A61L 9/127 392/395
	7,574,432	B1	8/2009	De Bellis	2008/0085103	A1 *	4/2008	Beland	A61L 9/127 392/390
	7,610,118	B2 *	10/2009	Schramm	2009/0149334	A1 *	6/2009	Waterbury	G01N 27/226 506/7
	7,622,073	B2 *	11/2009	Schramm	2010/0018732	A1	1/2010	Daniel et al.	
	7,625,187	B2 *	12/2009	Collins	2010/0094468	A1 *	4/2010	Sahu	G01F 23/0076 700/281
	D615,415	S	5/2010	Holmes et al.	2010/0143186	A1	6/2010	Belmonte et al.	
	7,712,683	B2	5/2010	Robert et al.	2010/0187327	A1	7/2010	Irvin	
	7,734,159	B2 *	6/2010	Beland	2010/0210313	A1	8/2010	Huang et al.	
	D623,532	S	9/2010	Kuzma et al.	2010/0226617	A1	9/2010	Piccionelli	
	7,930,068	B2	4/2011	Robert et al.	2010/0243754	A1	9/2010	Harris	
	D639,923	S *	6/2011	Belongia	2011/0220636	A1 *	9/2011	Hendricks	H05B 1/0252 219/494
	8,027,575	B2 *	9/2011	Hasik	2012/0018528	A1	1/2012	Samain	
	8,135,265	B2 *	3/2012	Tollens	2012/0080537	A1	4/2012	Walter	
	8,170,405	B2 *	5/2012	Harris	2012/0240932	A1 *	9/2012	Gusky	A61M 16/0875 128/204.21
	8,346,894	B2	1/2013	Arunachalam	2012/0262133	A1 *	10/2012	Martinelli	H02M 1/15 323/234
	8,429,005	B2	4/2013	Mannik et al.	2013/0081541	A1	4/2013	Hasenoehrl et al.	
	8,472,976	B1	6/2013	Ledet	2013/0093108	A1	4/2013	Scolari	
	8,615,825	B2 *	12/2013	Bovill	2013/0276532	A1 *	10/2013	Kato	G01F 23/268 73/304 C
	8,633,623	B2 *	1/2014	Bingler	2014/0152323	A1	6/2014	Kumar et al.	
	8,721,962	B2 *	5/2014	Woo	2015/0133209	A1	5/2015	Patterson et al.	
	8,881,945	B2 *	11/2014	Gaspar	2015/0235546	A1	8/2015	Stapleford	
	8,892,129	B1	11/2014	Ledet	2015/0267123	A1 *	9/2015	Ito	C10G 2/344 518/712
	8,910,640	B2 *	12/2014	Sears	2015/0297776	A1	10/2015	Conroy et al.	
	8,983,278	B2 *	3/2015	Ruiz Ballesteros	2015/0352544	A1 *	12/2015	Buermann	B01L 3/0289 435/6.11
	8,983,279	B2 *	3/2015	Adair	2015/0359263	A1	12/2015	Bellinger	
	9,427,485	B2 *	8/2016	Tremblay	2016/0081393	A1	3/2016	Black	
	9,462,414	B1	10/2016	Ledet	2016/0097668	A1 *	4/2016	Vilag	B67D 7/3272 222/65
	9,669,125	B2 *	6/2017	Gaspar	2016/0157524	A1	6/2016	Bowen et al.	
	9,717,813	B2 *	8/2017	Deflorian	2016/0361452	A1	12/2016	Blackley	
	10,179,184	B2 *	1/2019	Belz	2017/0046738	A1	2/2017	Cameron	
	10,561,804	B1 *	2/2020	Culligan	2017/0055740	A1 *	3/2017	Sindi	A47G 19/2227
	2003/0138241	A1	7/2003	Pedrotti et al.	2018/0020727	A1	1/2018	Hoffman et al.	
	2004/0005240	A1	1/2004	Adiga et al.	2018/0153208	A1	6/2018	Schaller et al.	
2004/0050951	A1	3/2004	Almero	2018/0286207	A1	10/2018	Baker et al.		

US 11,213,601 B2

Page 4

(56) **References Cited**

U.S. PATENT DOCUMENTS

2019/0158938 A1 5/2019 Bowen et al.
2019/0369576 A1 12/2019 Elrod

FOREIGN PATENT DOCUMENTS

EP 0345149 A3 5/1989
WO 1990012600 A1 11/1990
WO 1996023530 A1 8/1996
WO 2004080604 A2 9/2004

OTHER PUBLICATIONS

International Search Report and Written Opinion, PCT/US2016/060184, dated Mar. 10, 2017 (16 pages).

Programmable System-on-Chip (PSoC), Cypress Embedded in Tomorrow, Jun. 28, 2016 (44 pages).

Wikipedia, "Geo-fence," downloaded from <https://en.wikipedia.org/wiki/Geo-fence>, Oct. 30, 2016 (2 pages).

CapSense Design Code, Cypress Perform, www.cypress.com, 2016 (113 pages).

CapSense_CSD_P4 Slider Design example project 1.20, Cypress Perform, 2014 (7 pages).

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US16/60184, dated May 17, 2018, 9 pages.

Office Action of Application No. CN201680077088.4, dated Apr. 9, 2020, p. 1-2.

Partial European Search Report and Search Opinion Received for EP Application No. 16862913, dated Mar. 27, 2019, 10 pages.

* cited by examiner

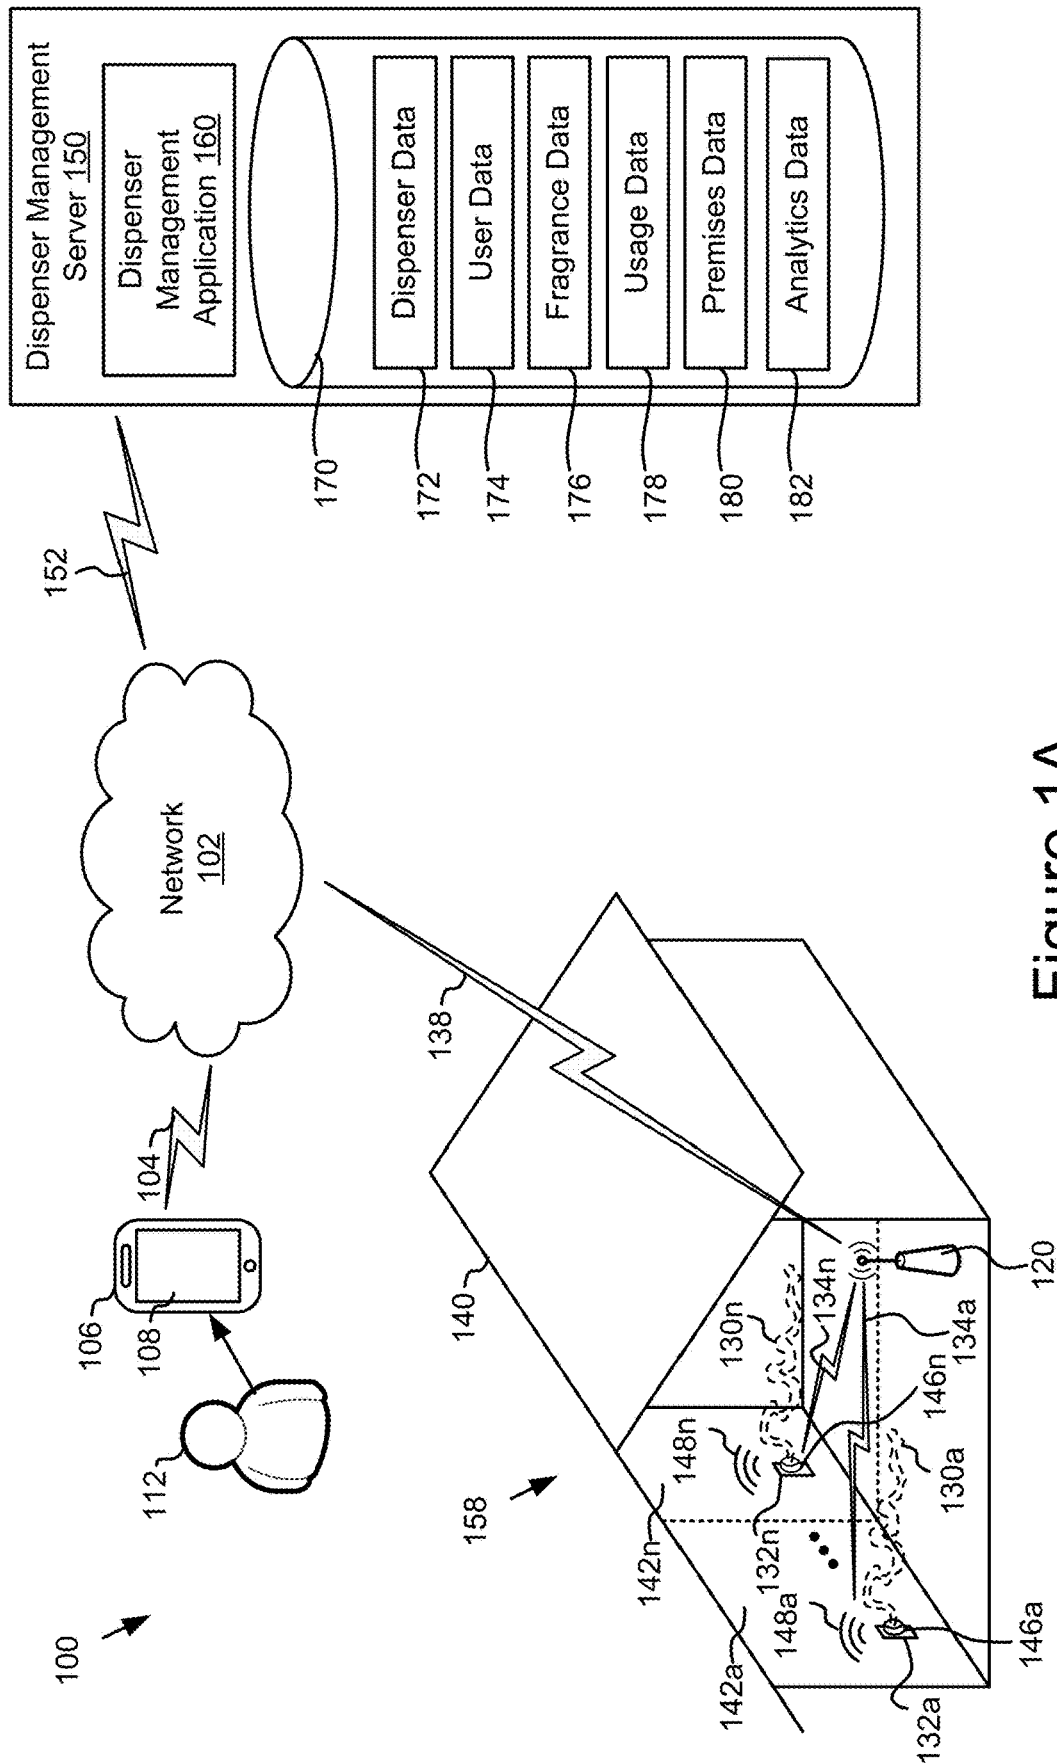


Figure 1A

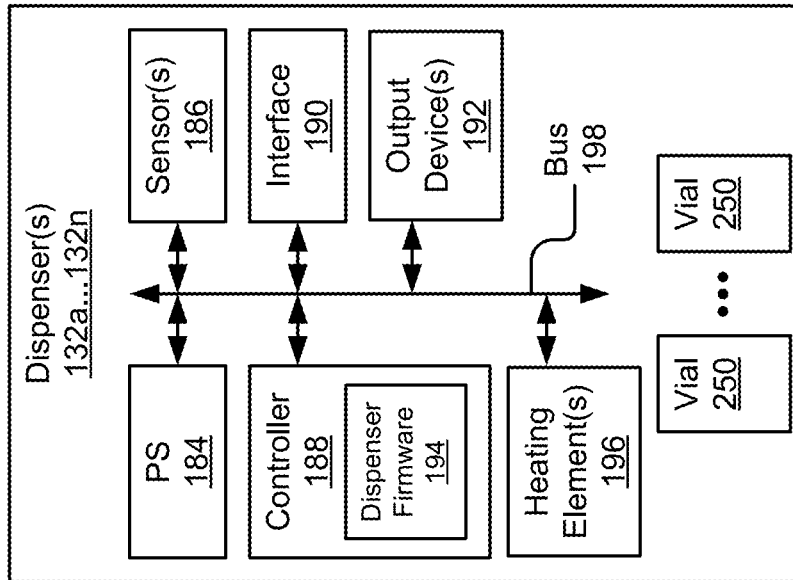


Figure 1B

U.S. Patent

Jan. 4, 2022

Sheet 3 of 52

US 11,213,601 B2

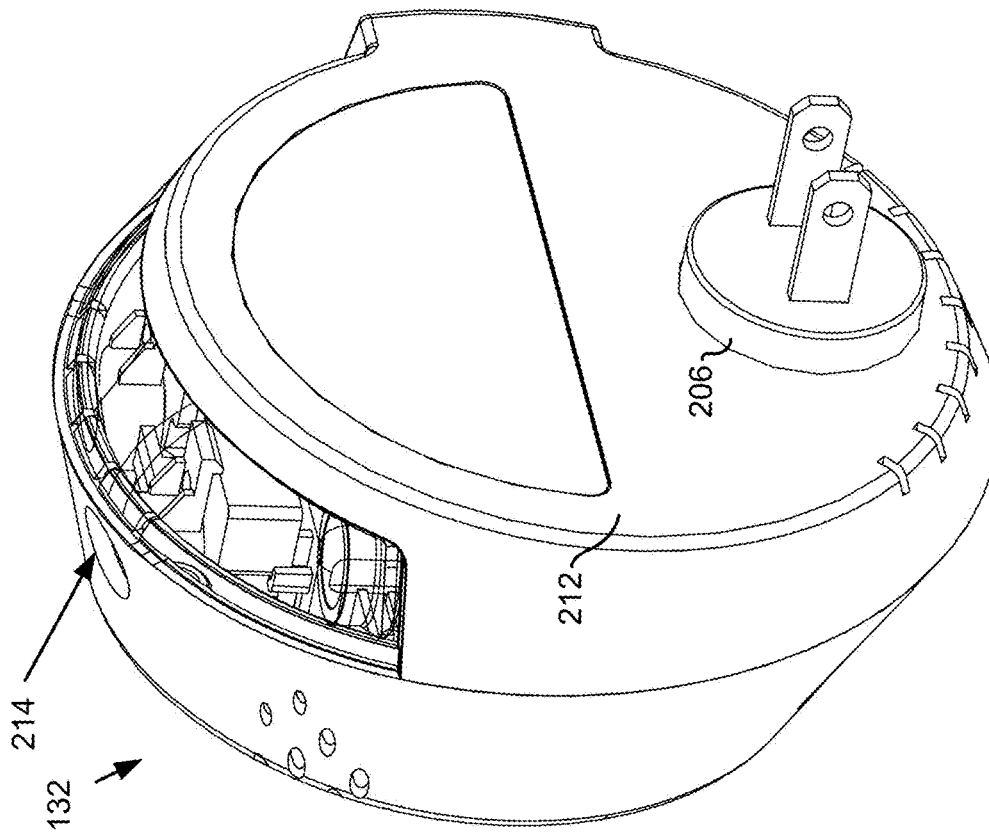


Figure 2B

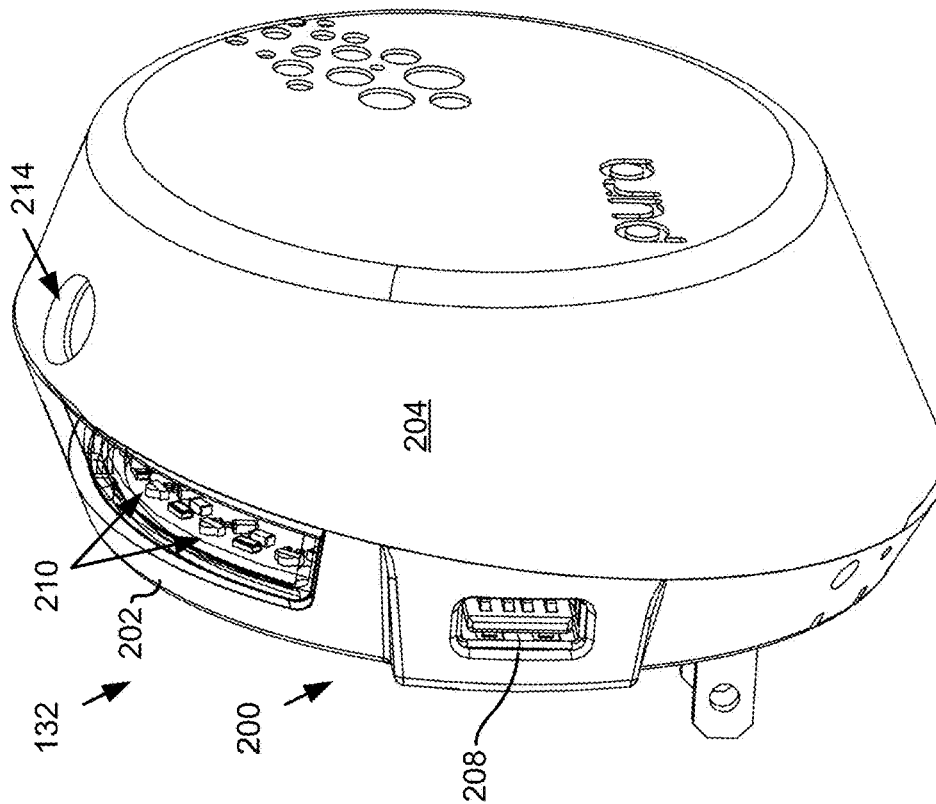


Figure 2A

U.S. Patent

Jan. 4, 2022

Sheet 4 of 52

US 11,213,601 B2

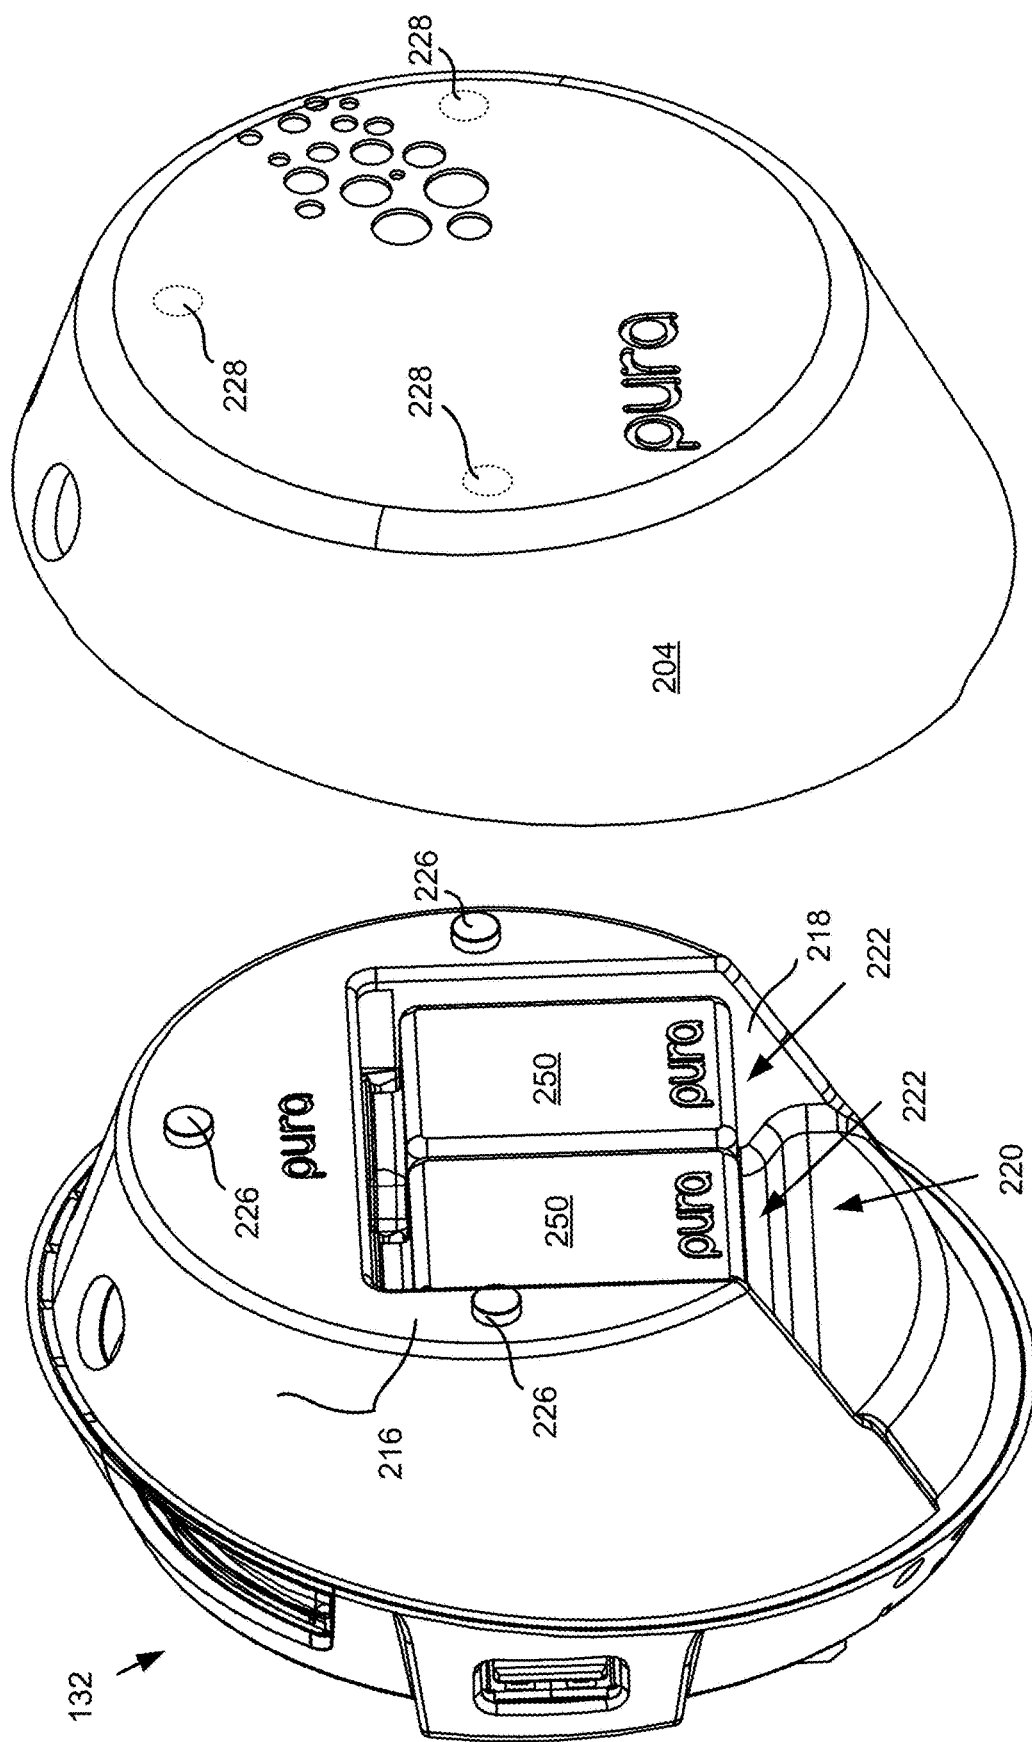


Figure 2C

U.S. Patent

Jan. 4, 2022

Sheet 5 of 52

US 11,213,601 B2

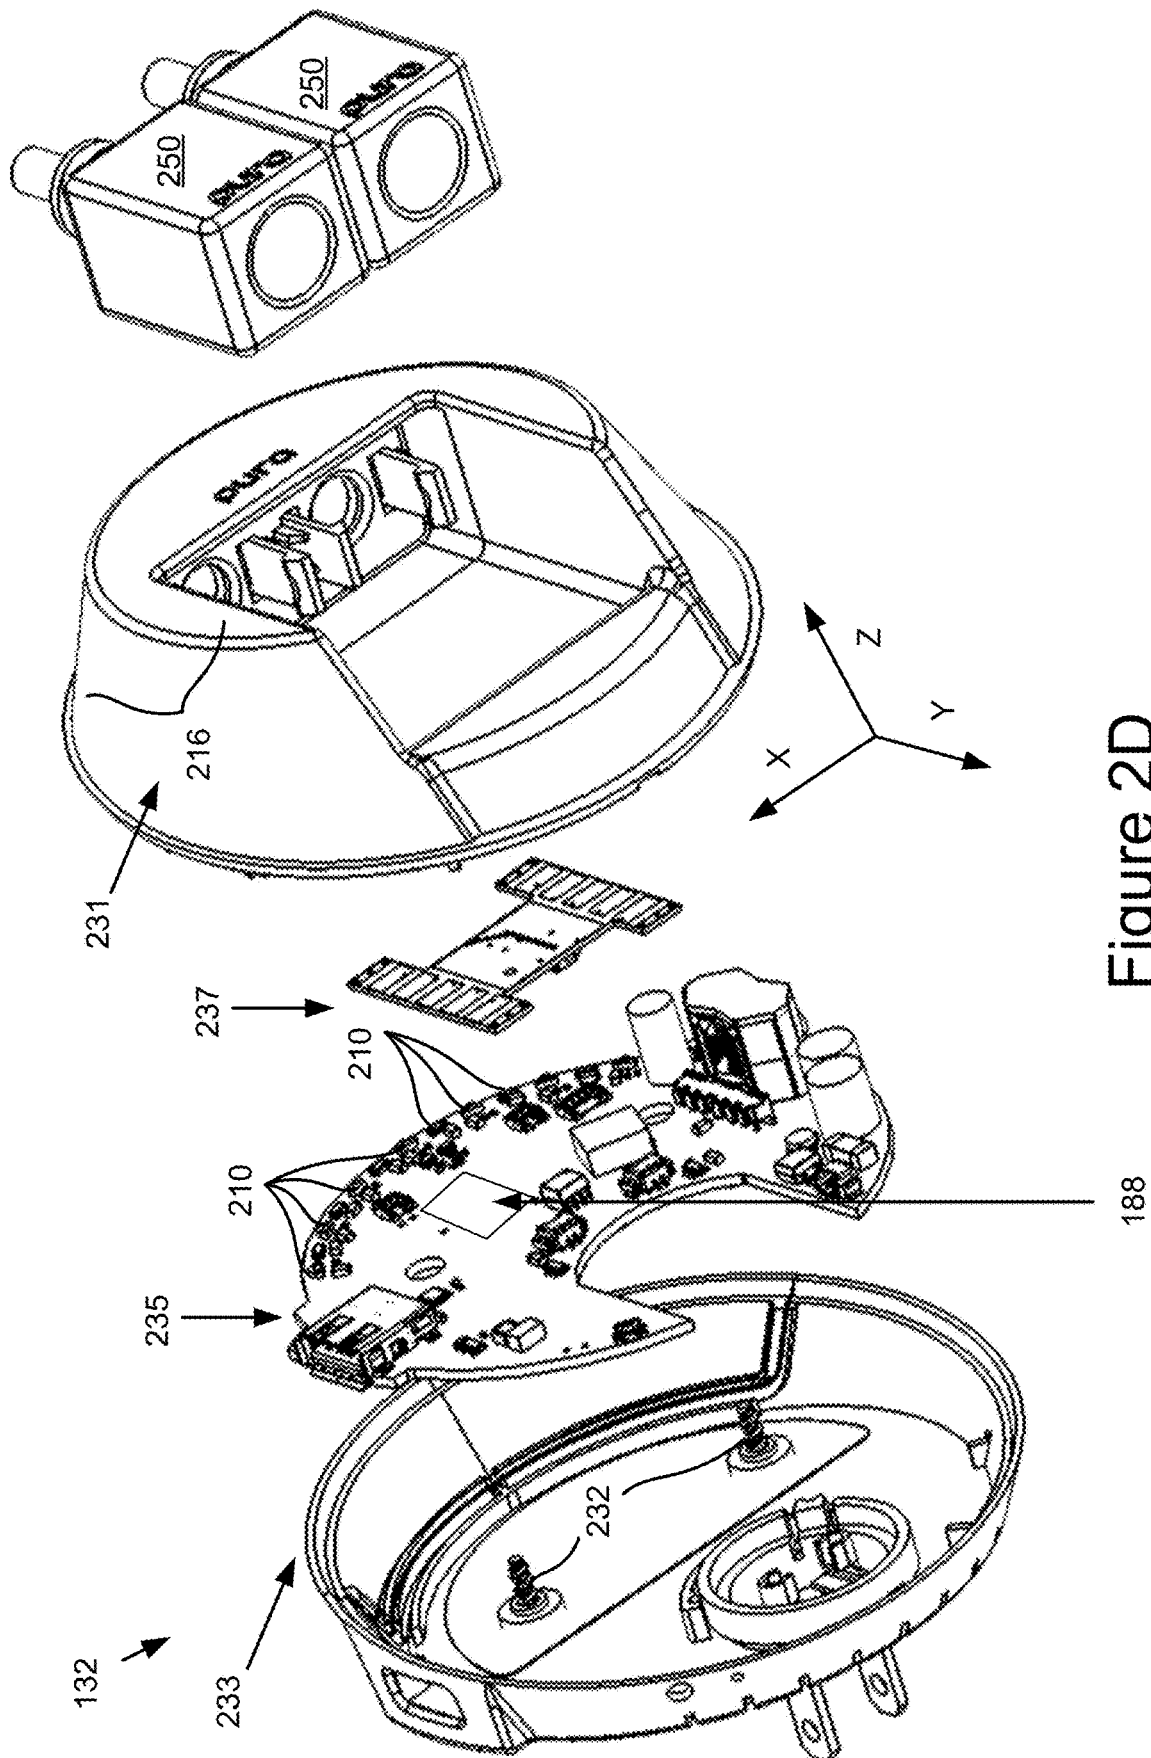


Figure 2D

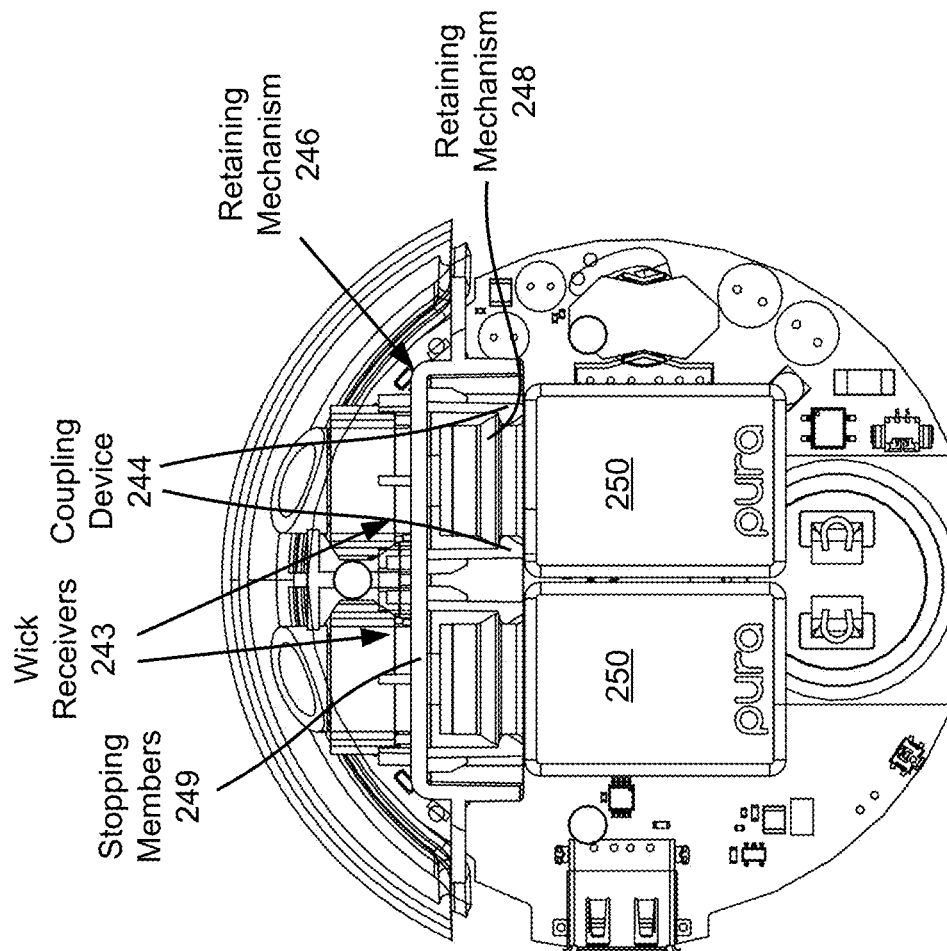


Figure 2E

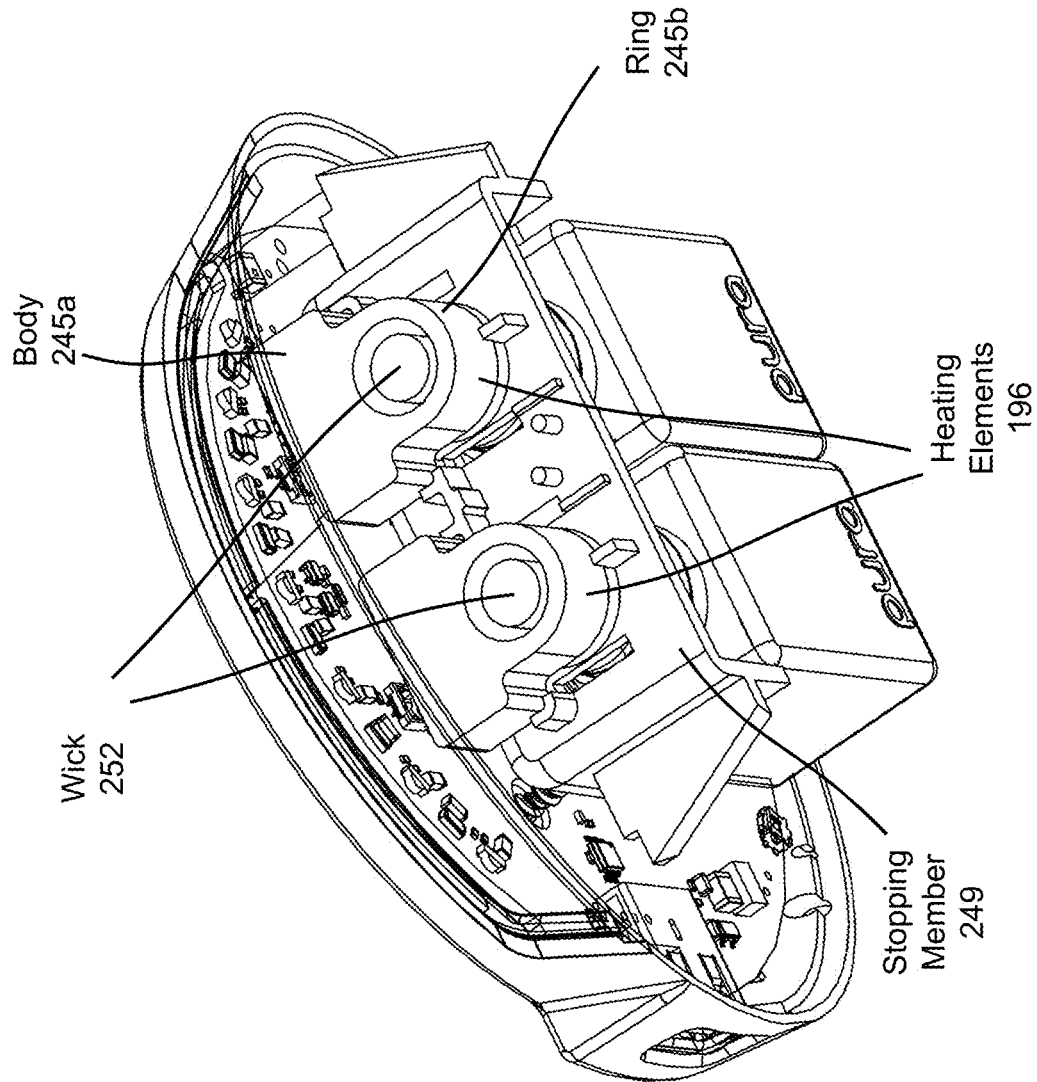


Figure 2F

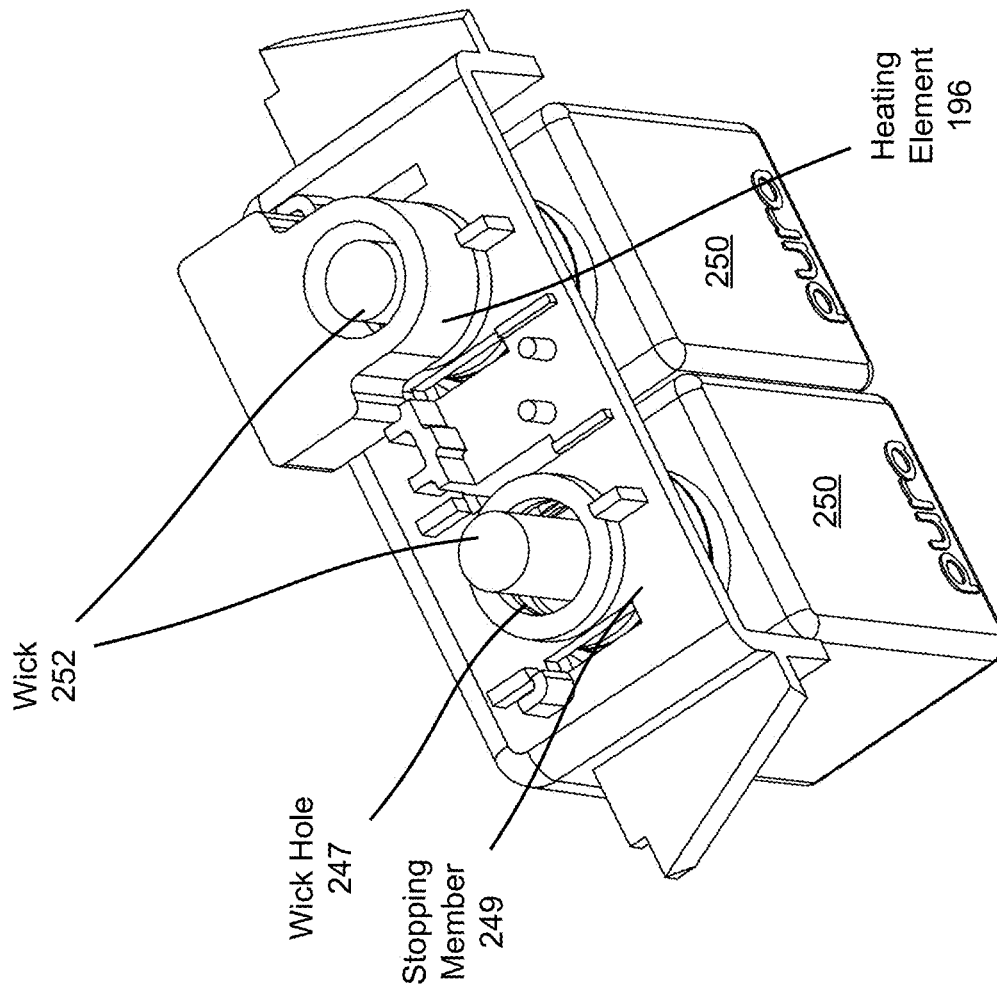


Figure 2G

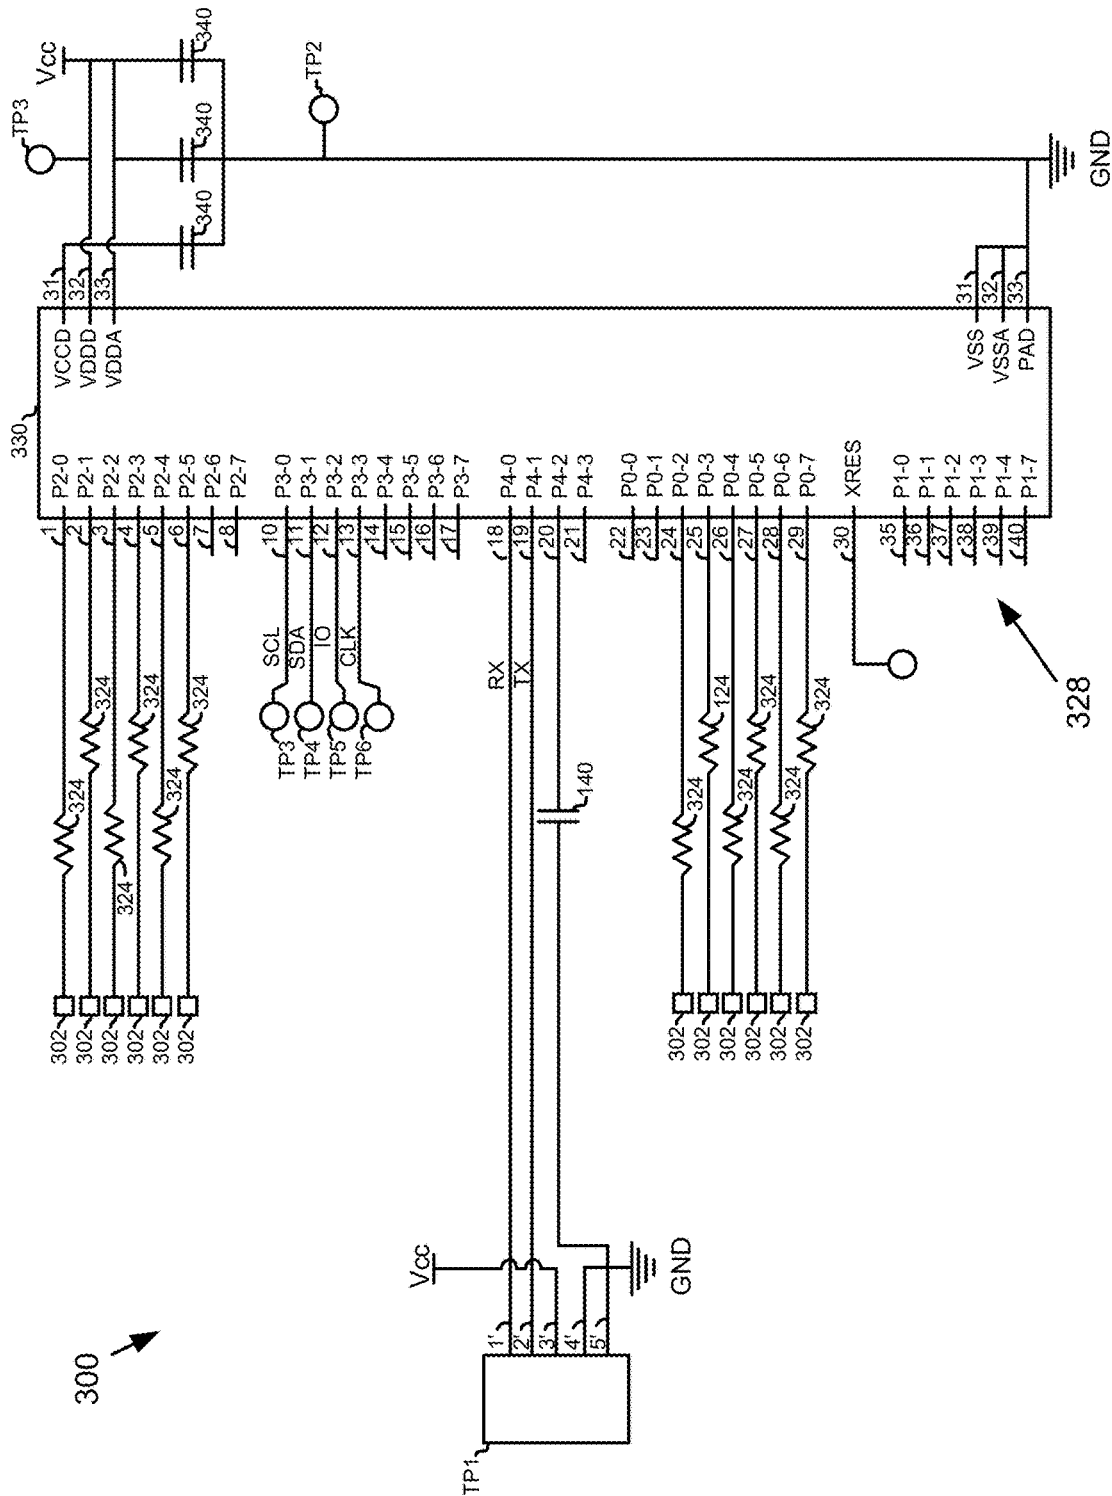


Figure 3A

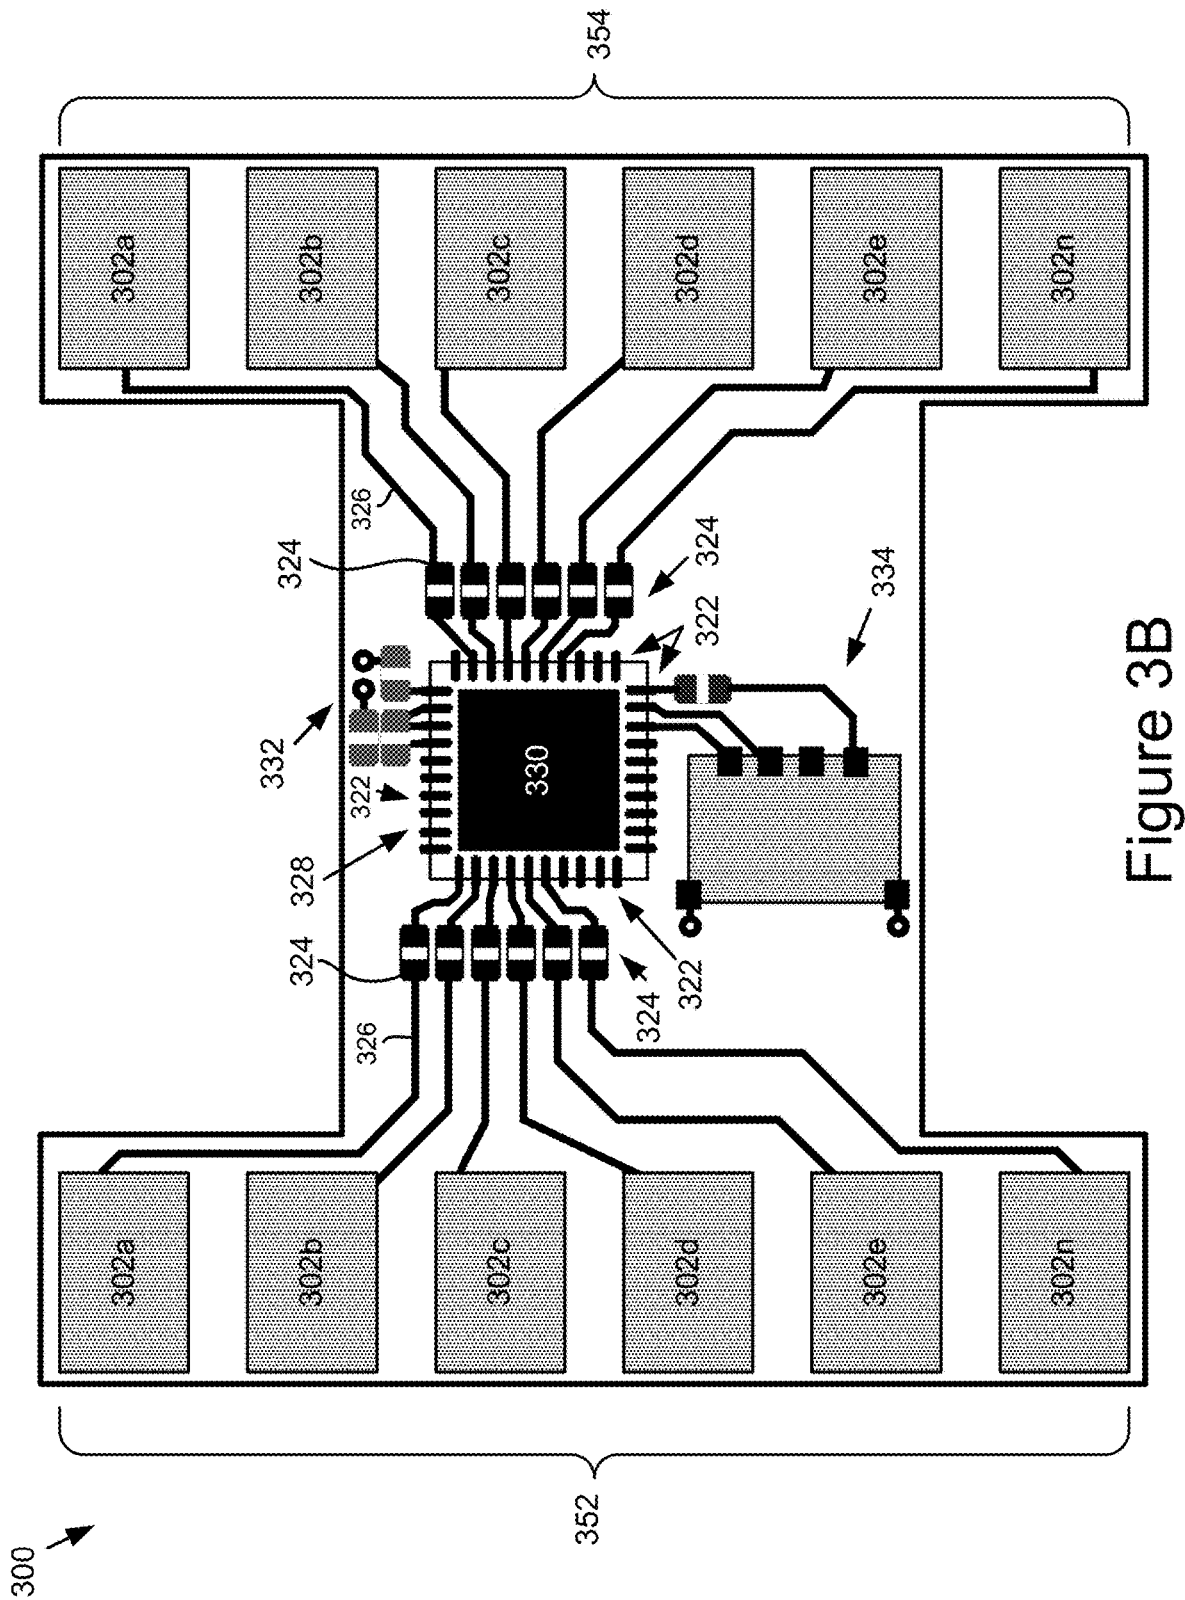


Figure 3B

U.S. Patent

Jan. 4, 2022

Sheet 11 of 52

US 11,213,601 B2

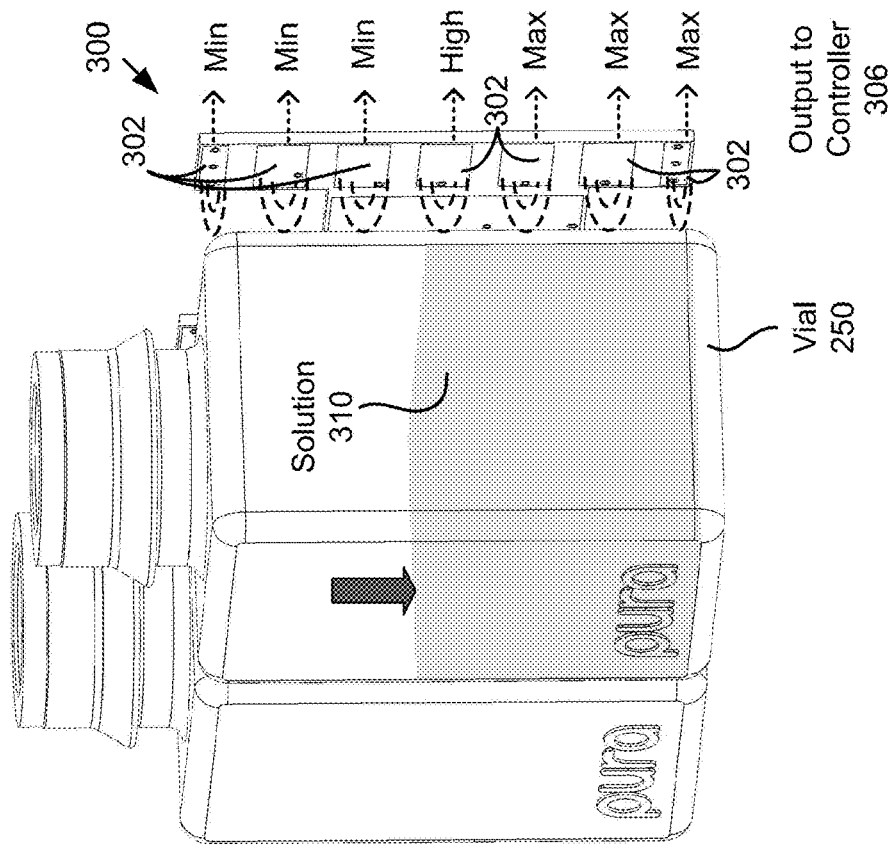


Figure 4B

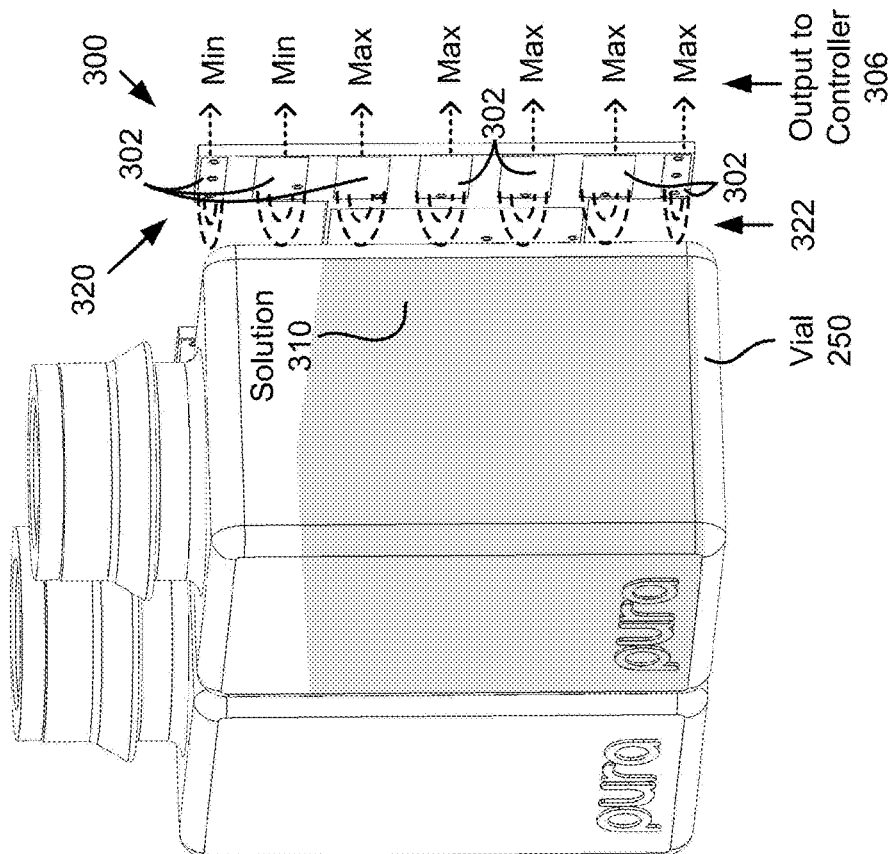


Figure 4A

U.S. Patent

Jan. 4, 2022

Sheet 12 of 52

US 11,213,601 B2

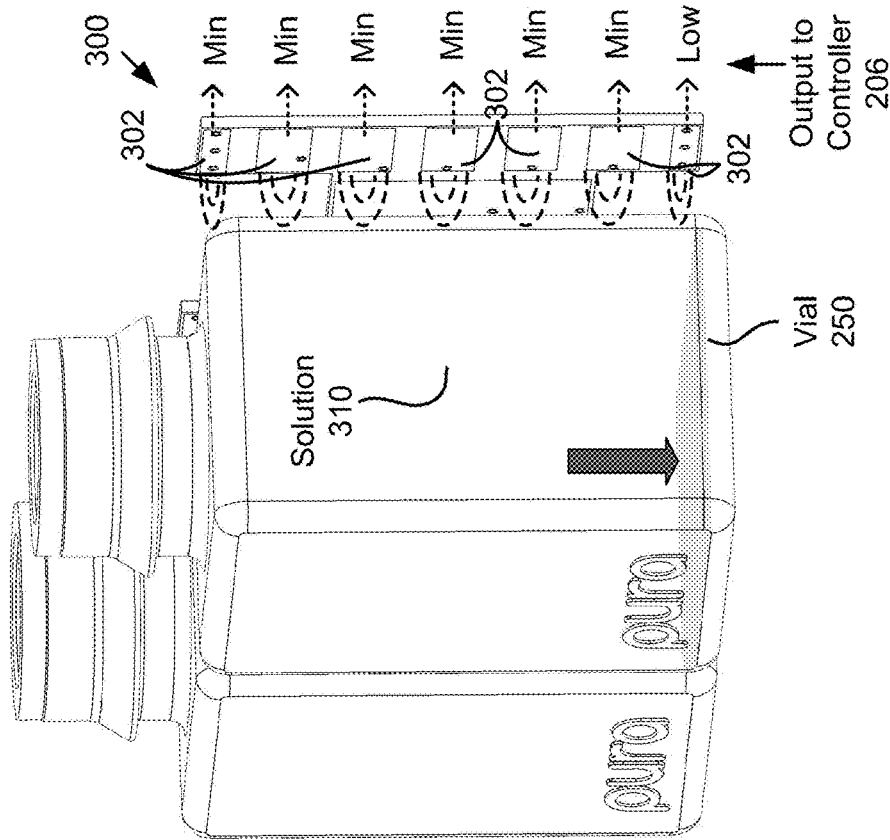


Figure 4D

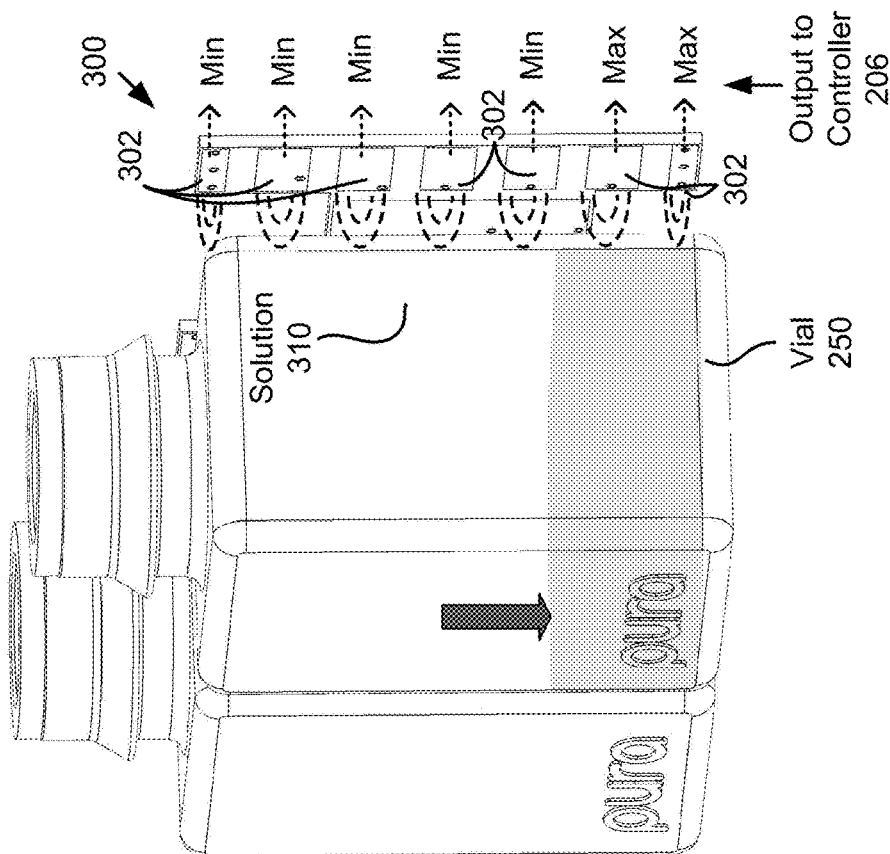


Figure 4C

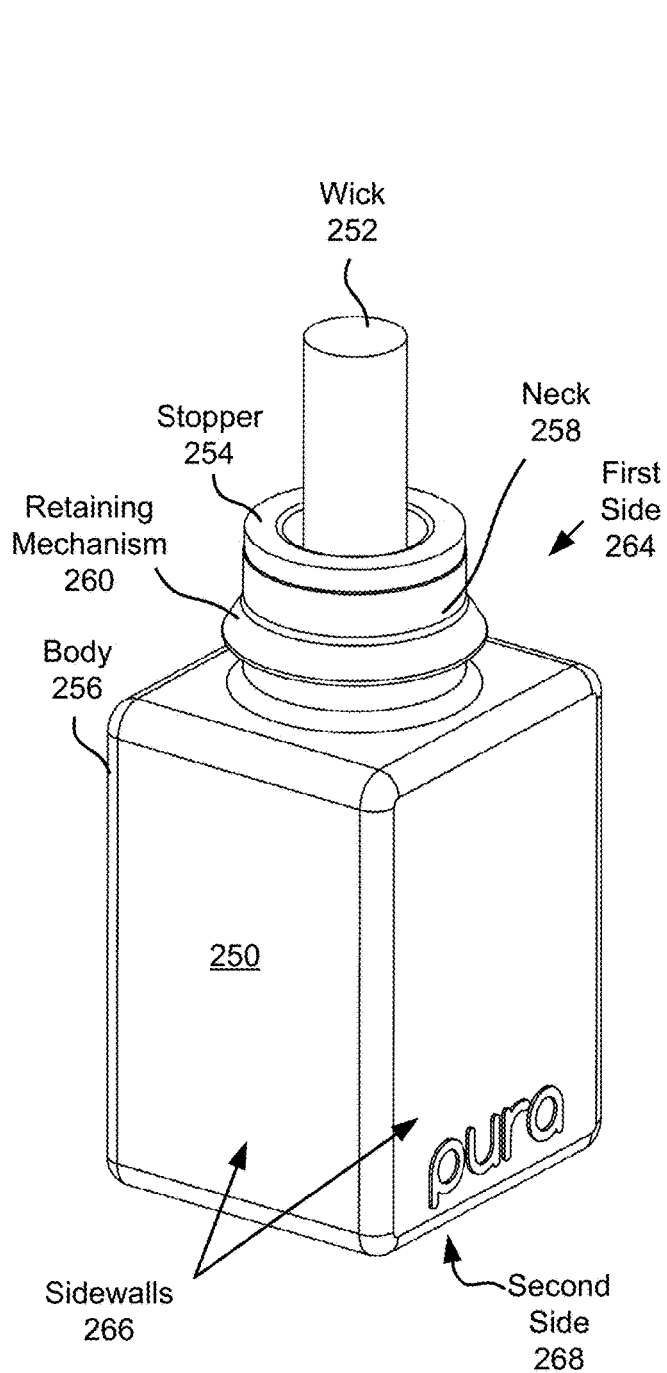


Figure 5A

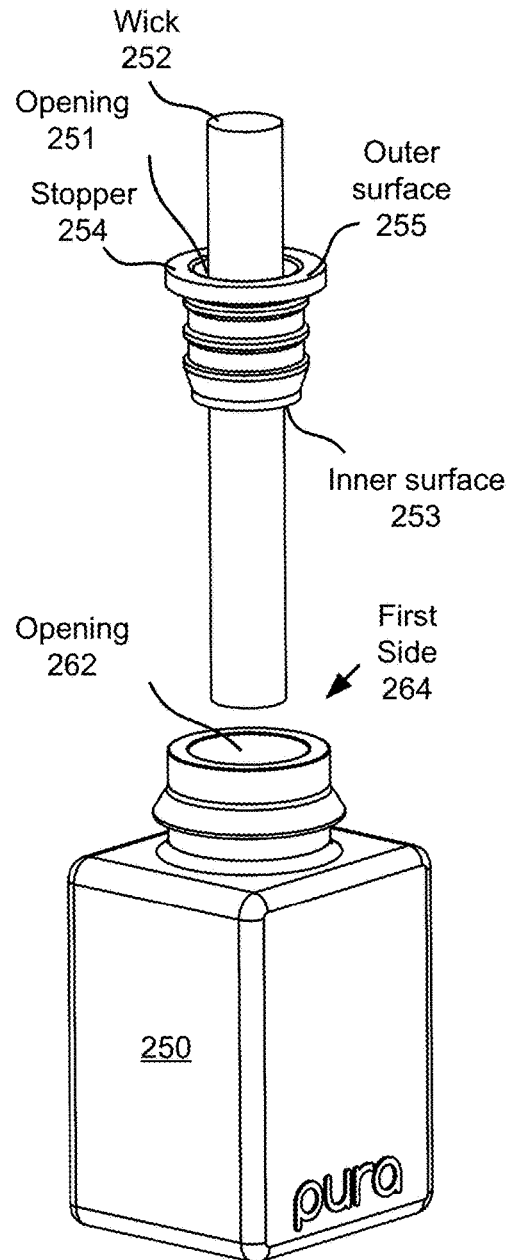


Figure 5B

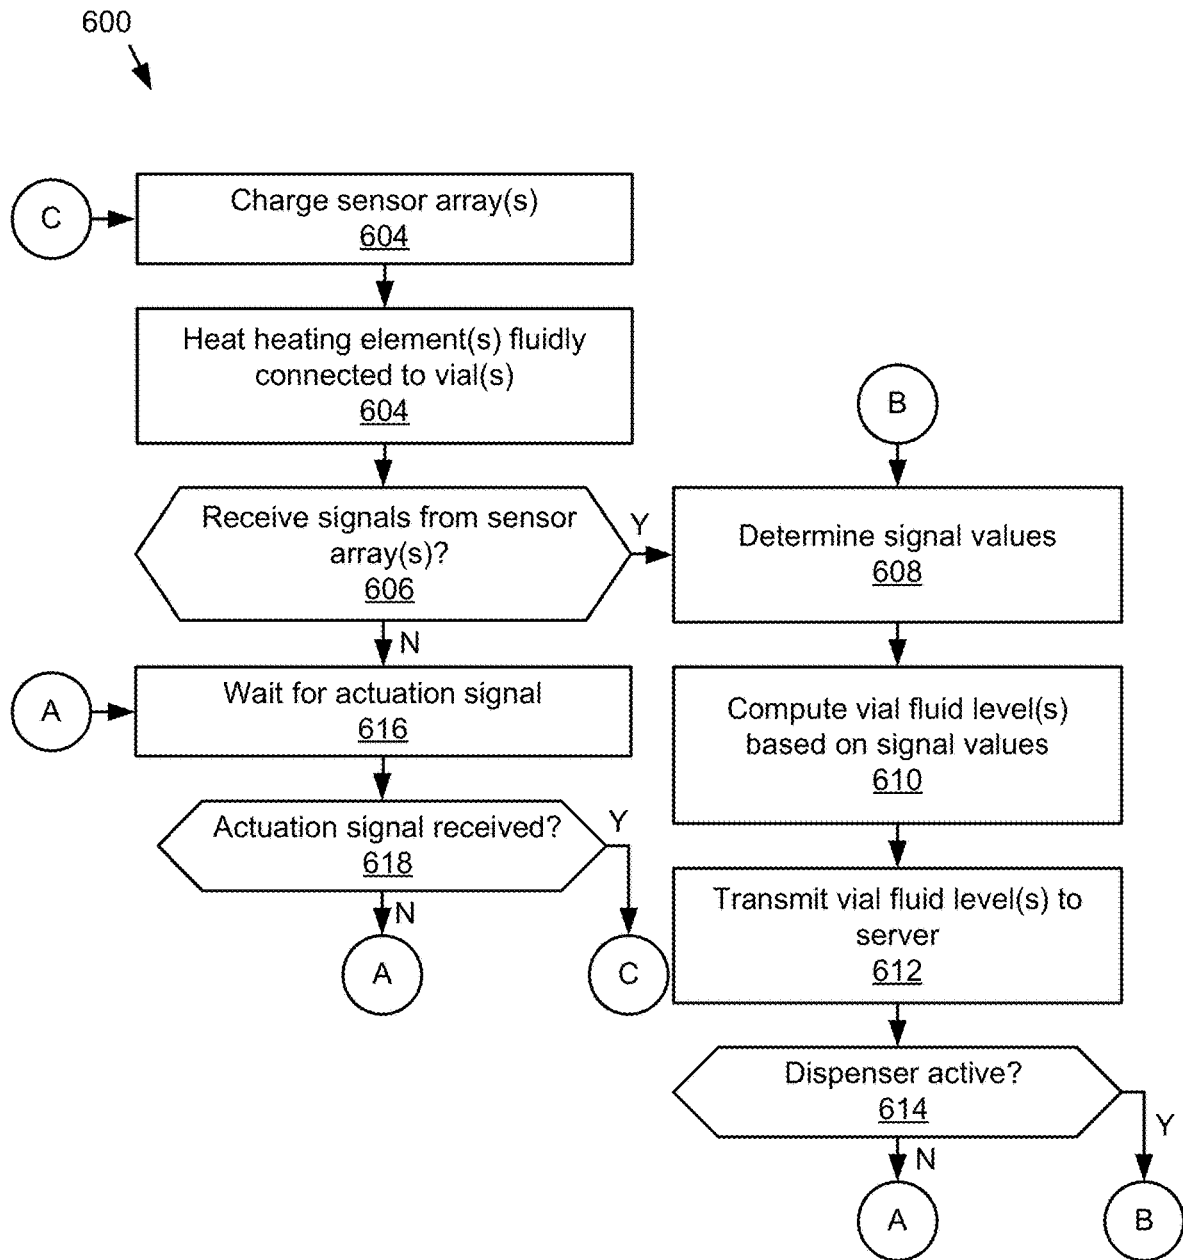


Figure 6

U.S. Patent

Jan. 4, 2022

Sheet 15 of 52

US 11,213,601 B2

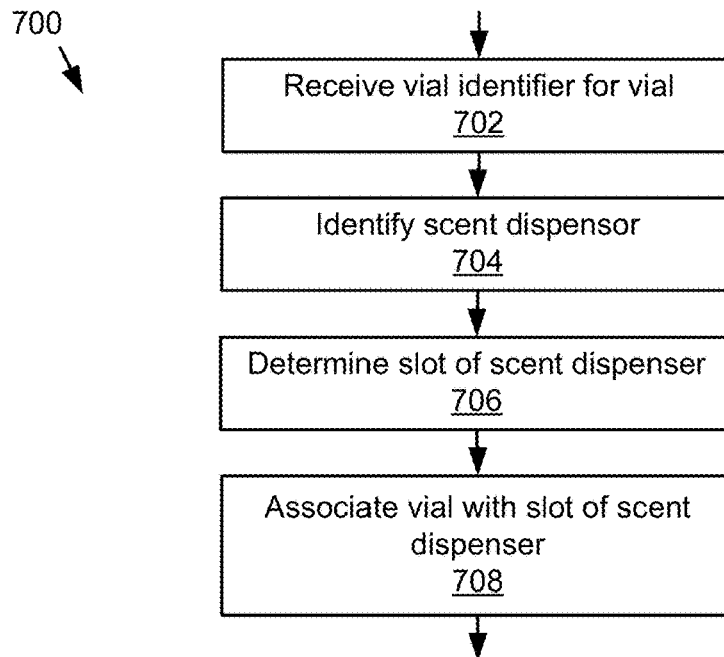


Figure 7A

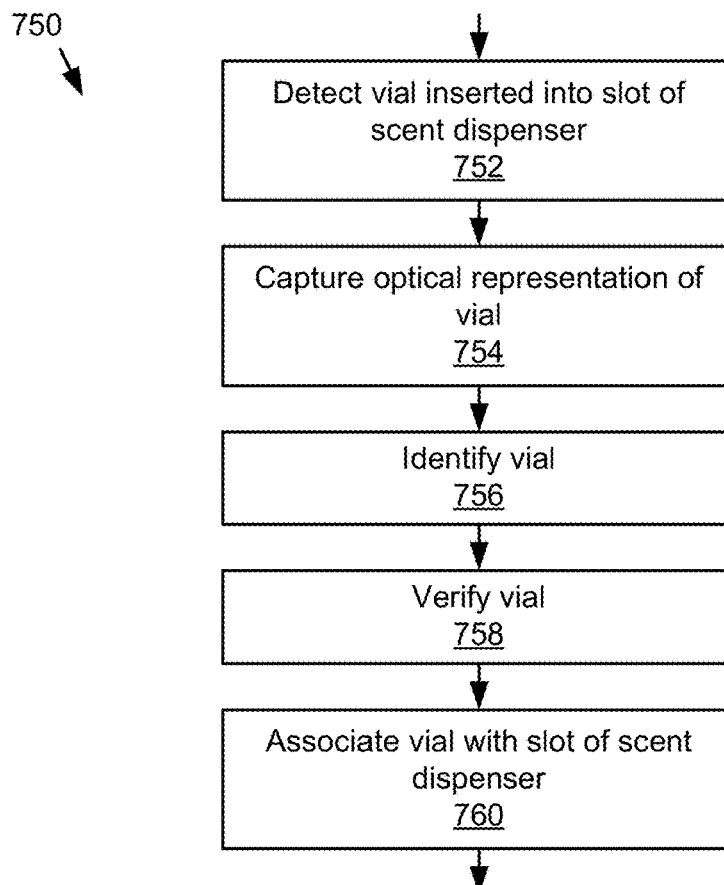


Figure 7B

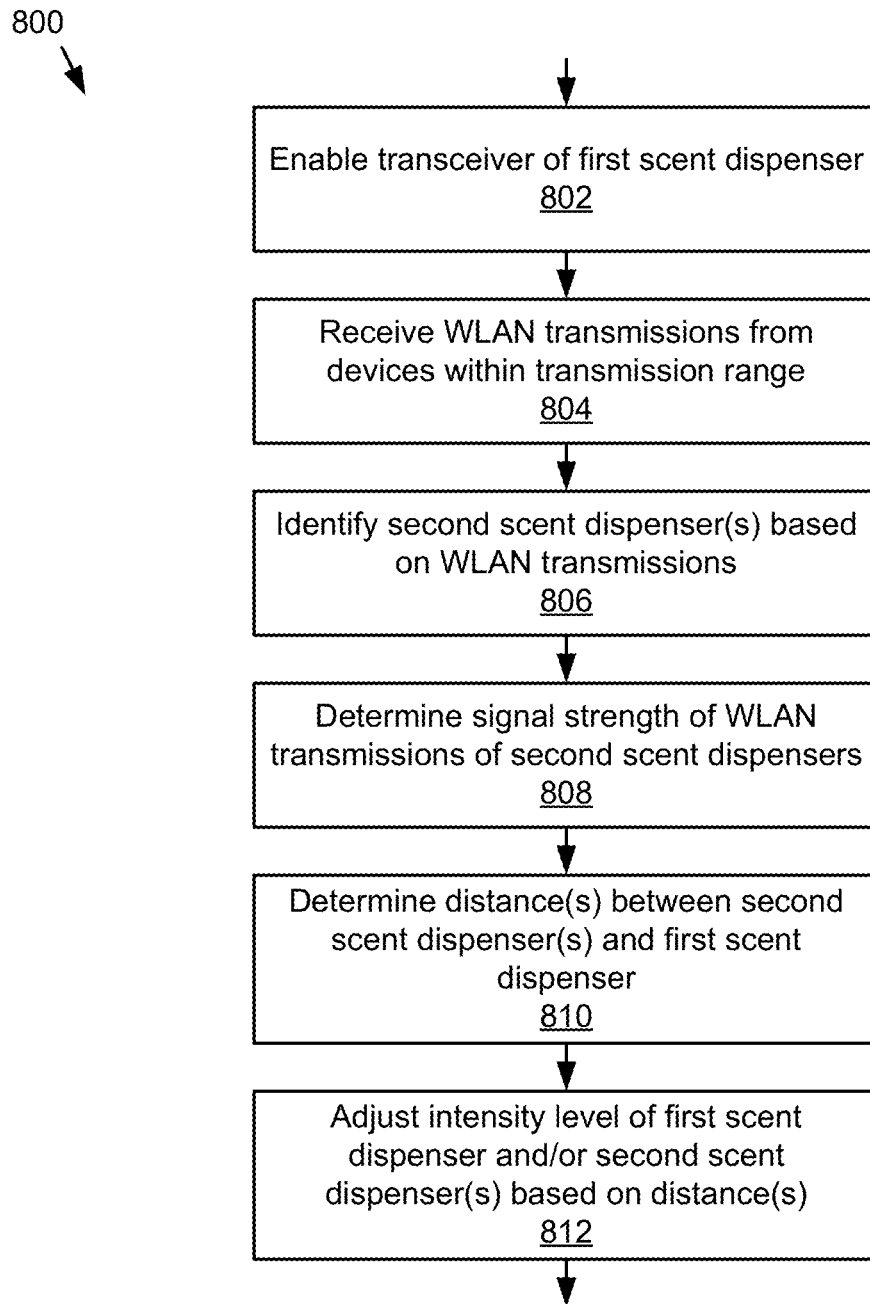


Figure 8

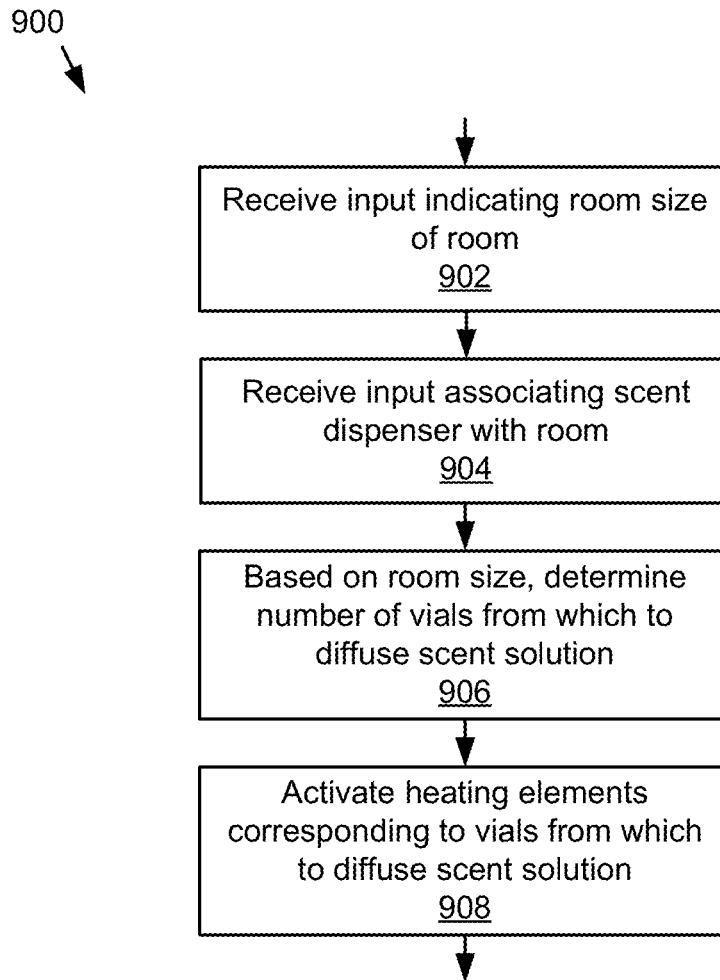


Figure 9

U.S. Patent

Jan. 4, 2022

Sheet 18 of 52

US 11,213,601 B2

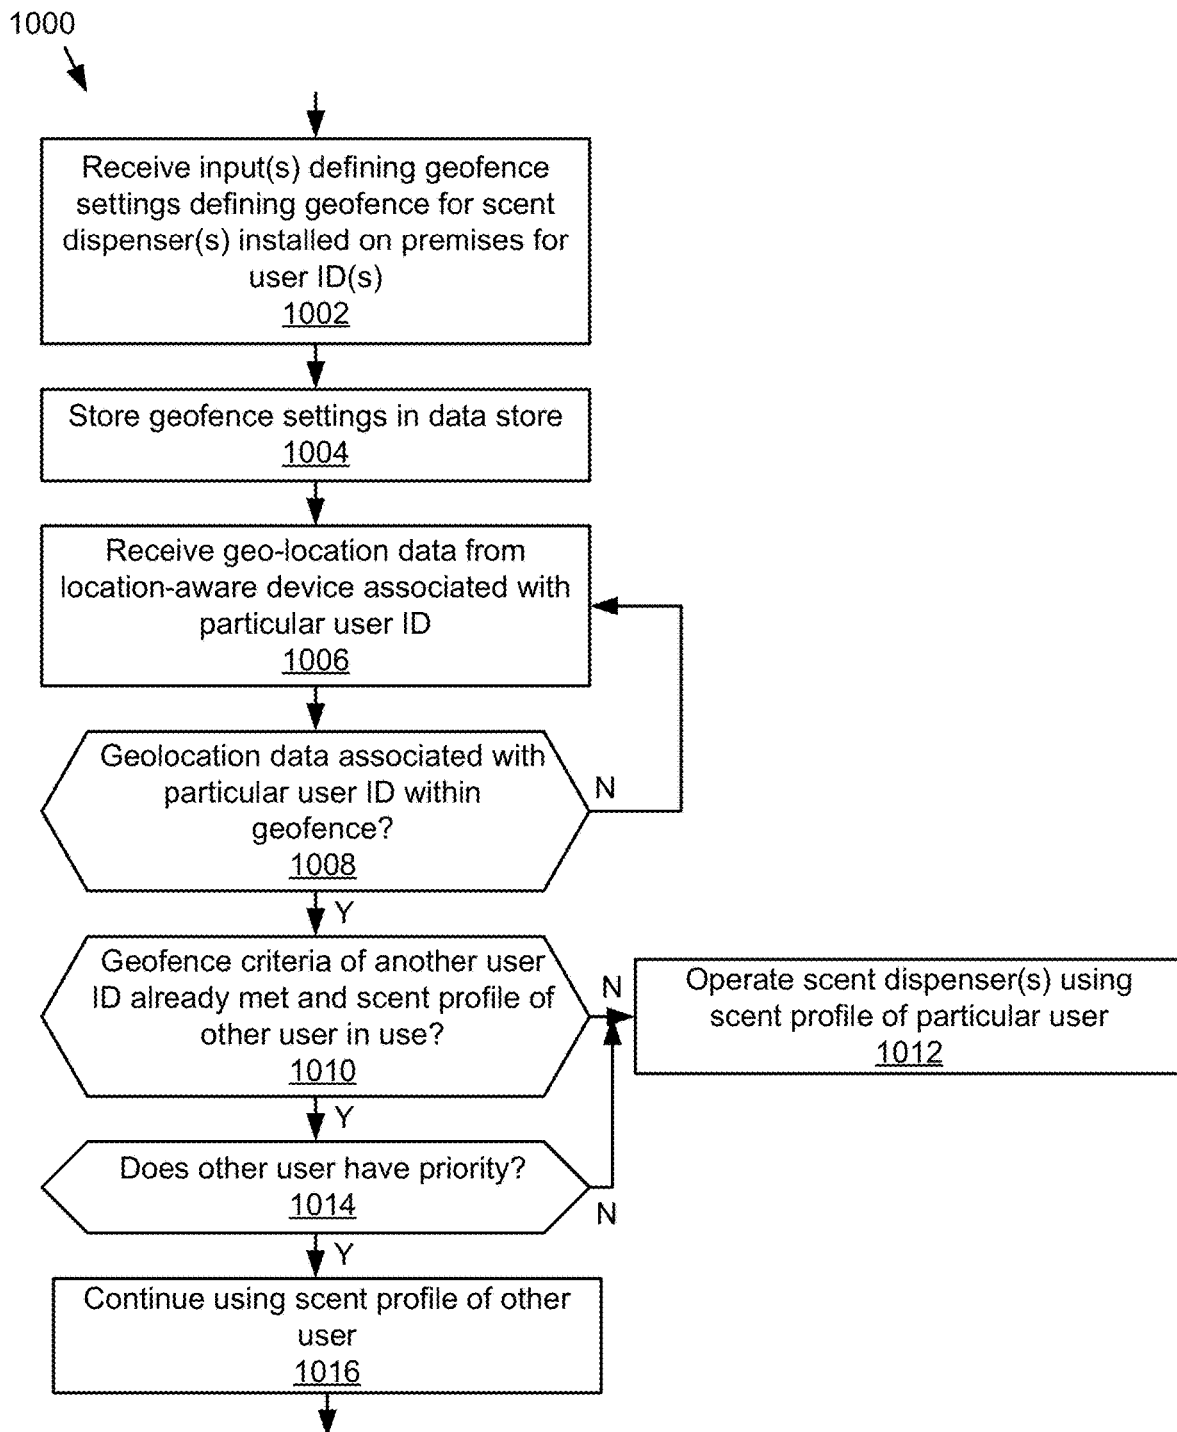


Figure 10

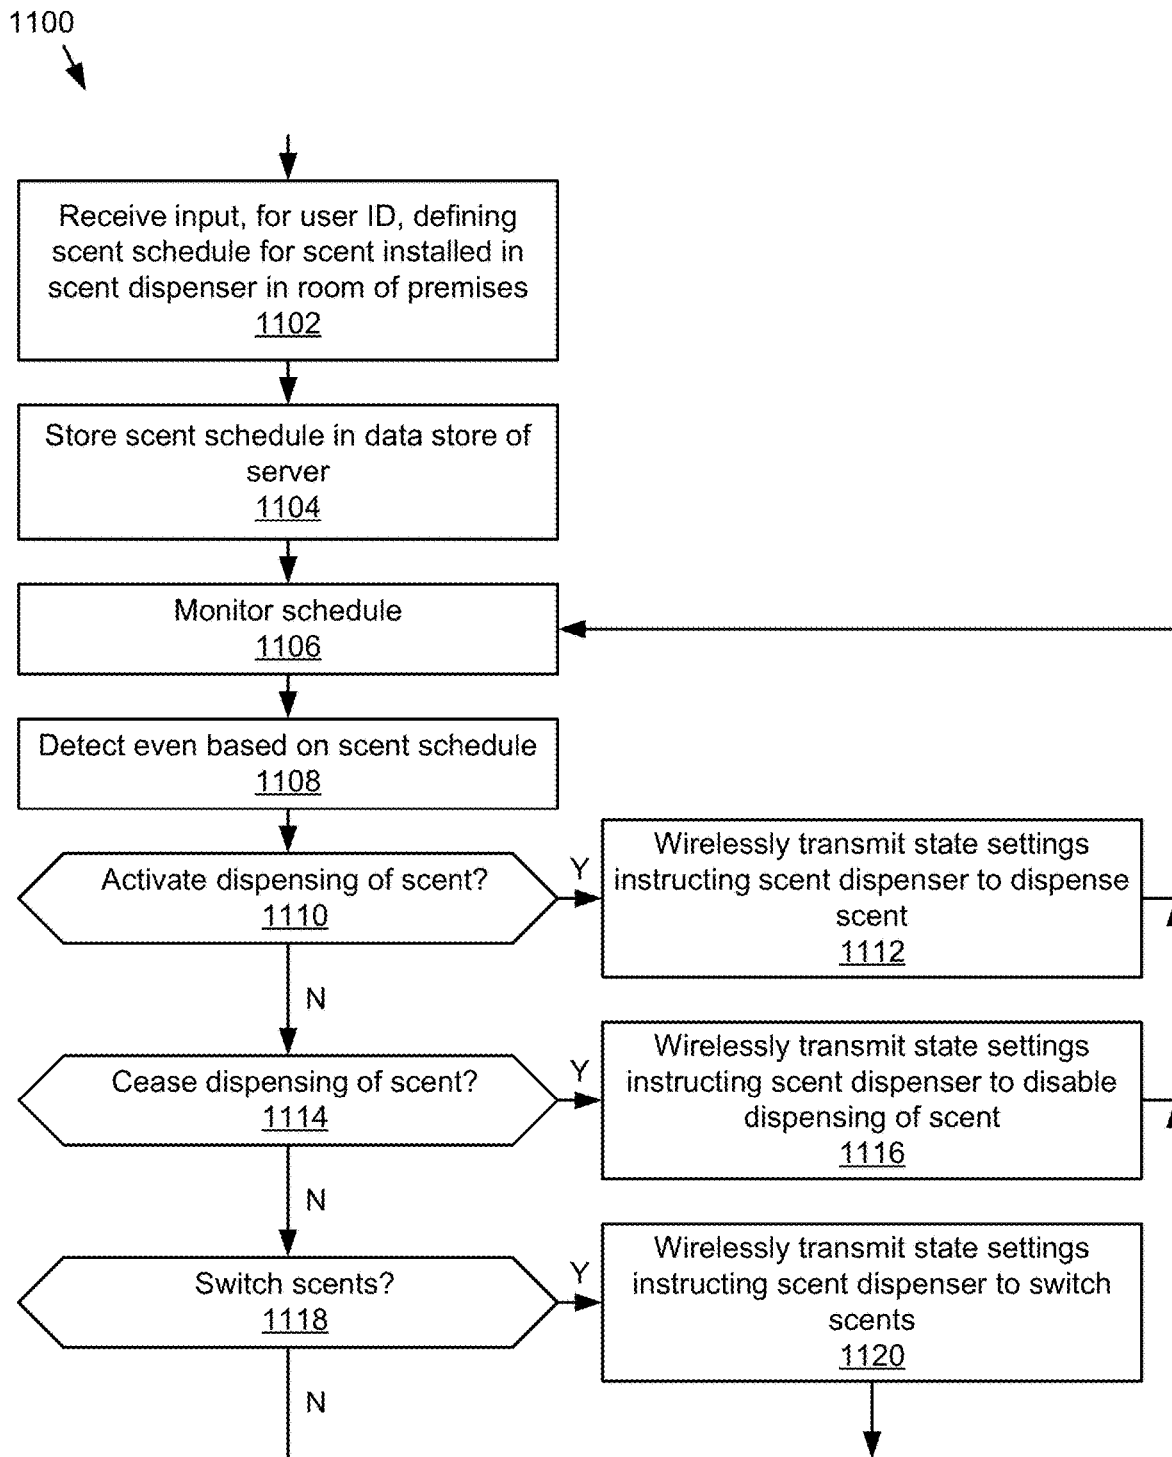


Figure 11

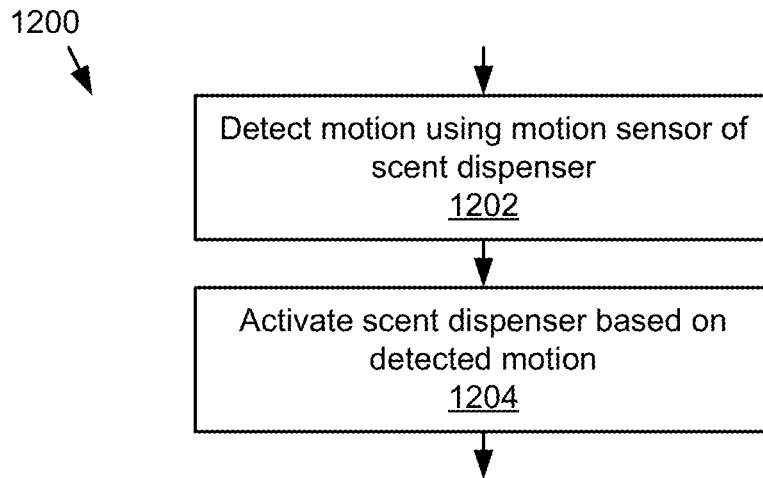


Figure 12A

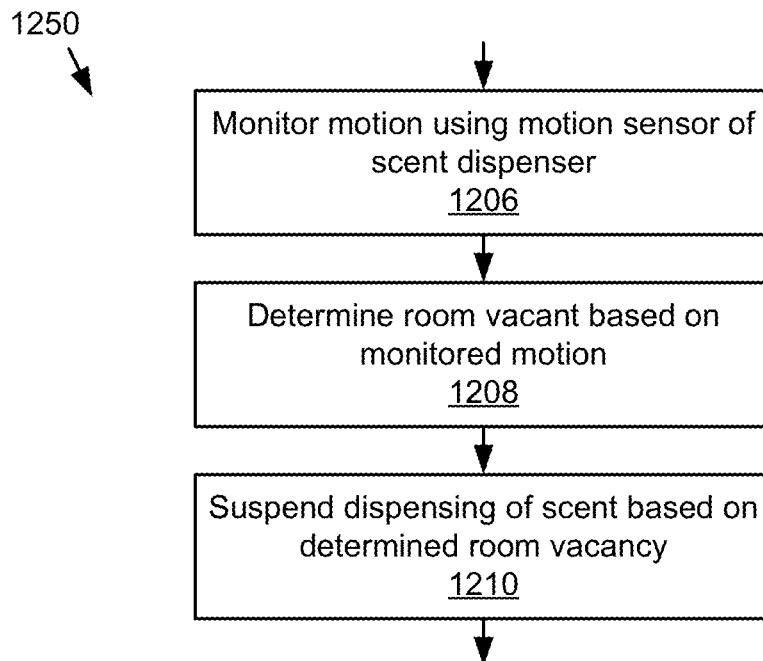


Figure 12B

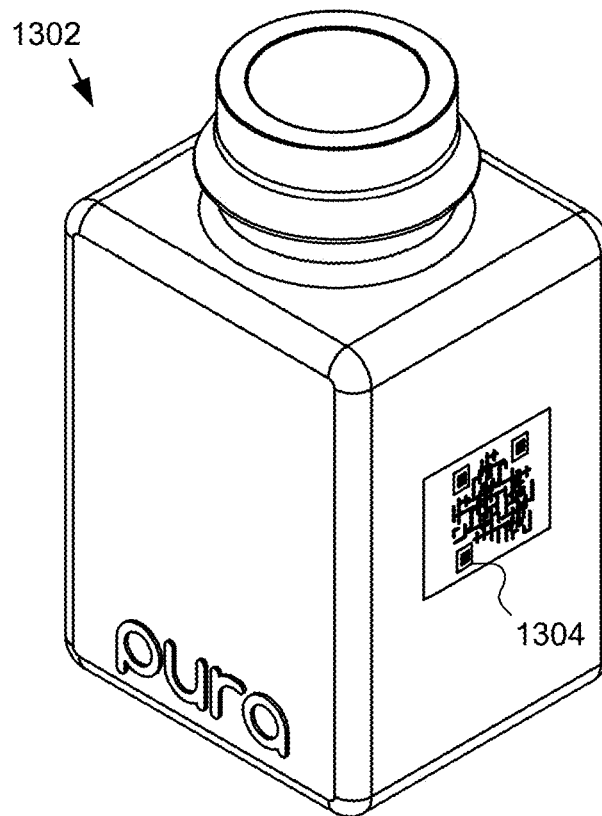


Figure 13



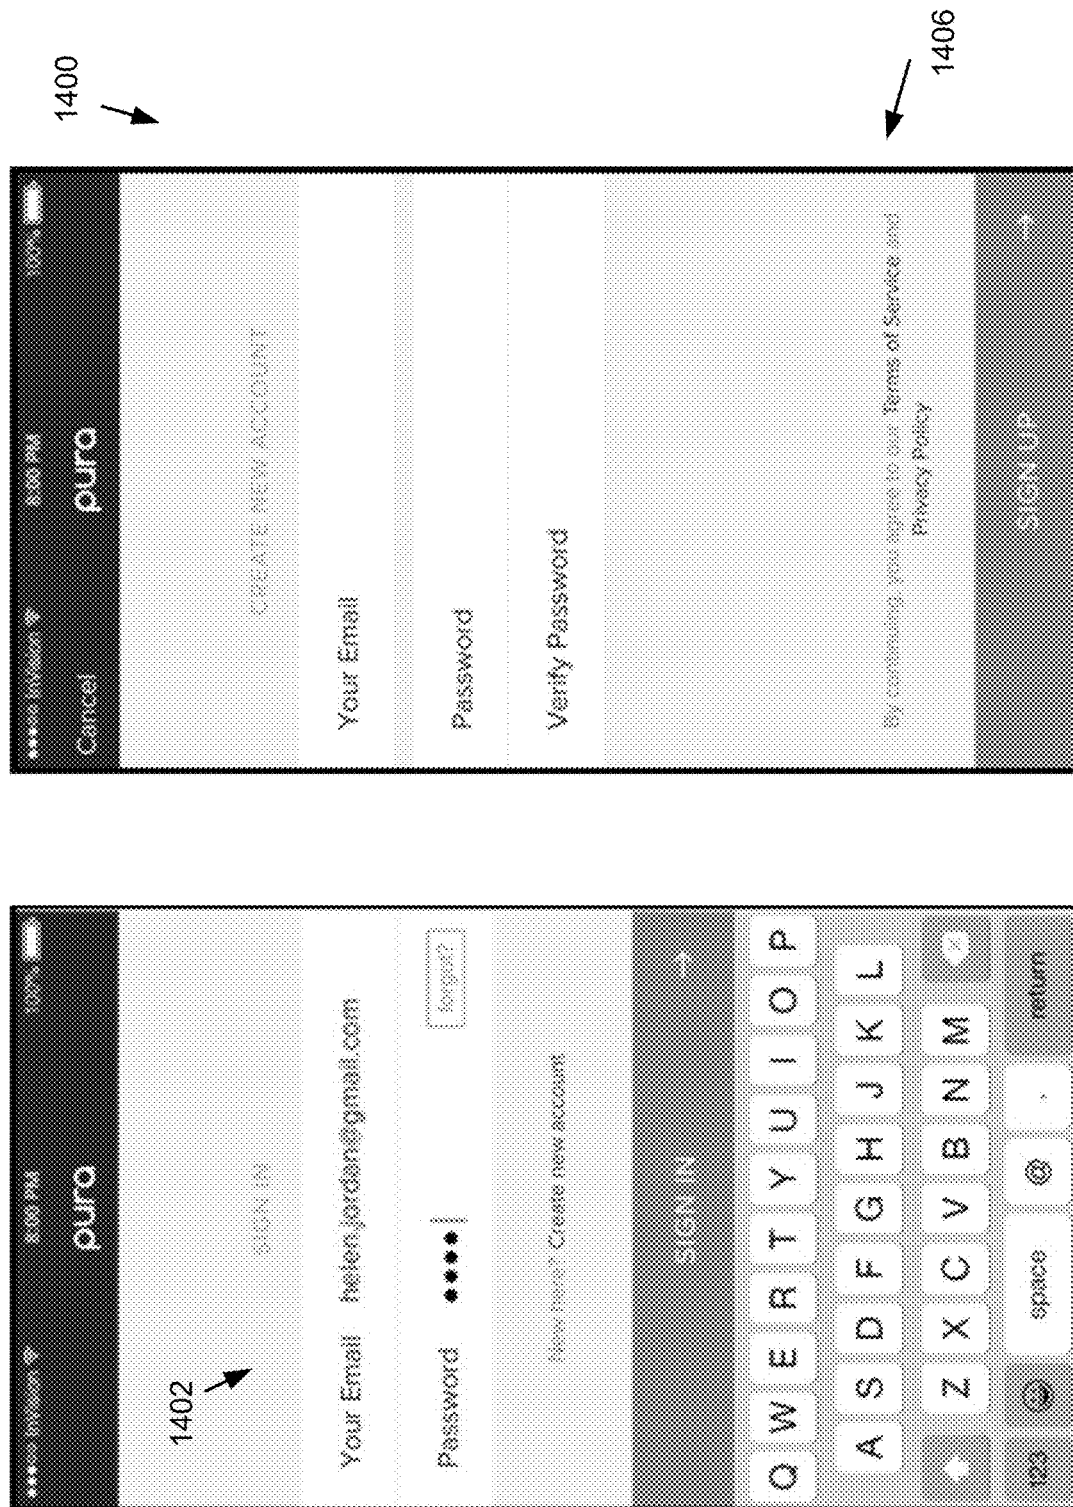


Figure 14B

Figure 14A

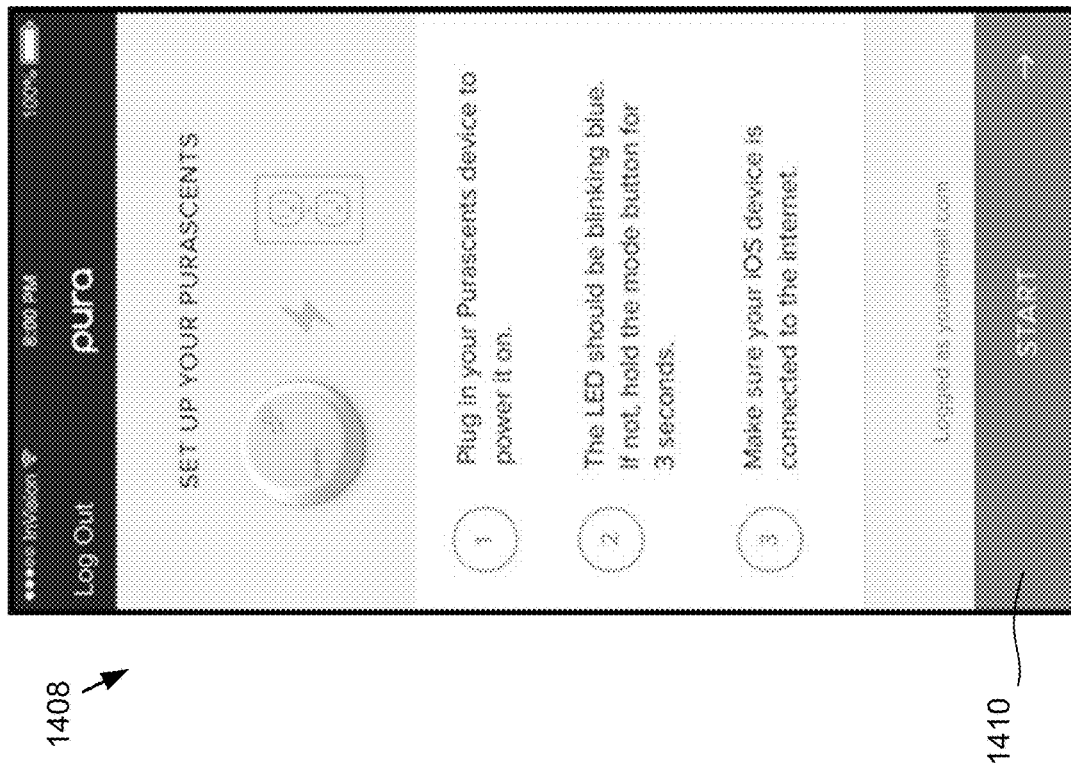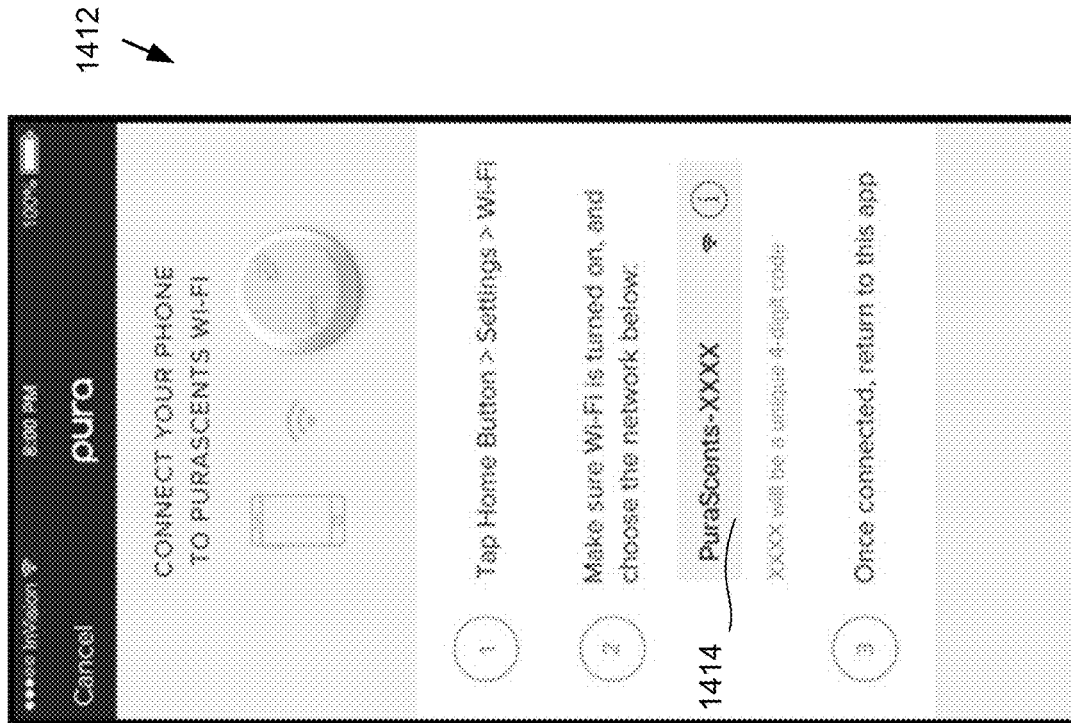

U.S. Patent

Jan. 4, 2022

Sheet 24 of 52

US 11,213,601 B2

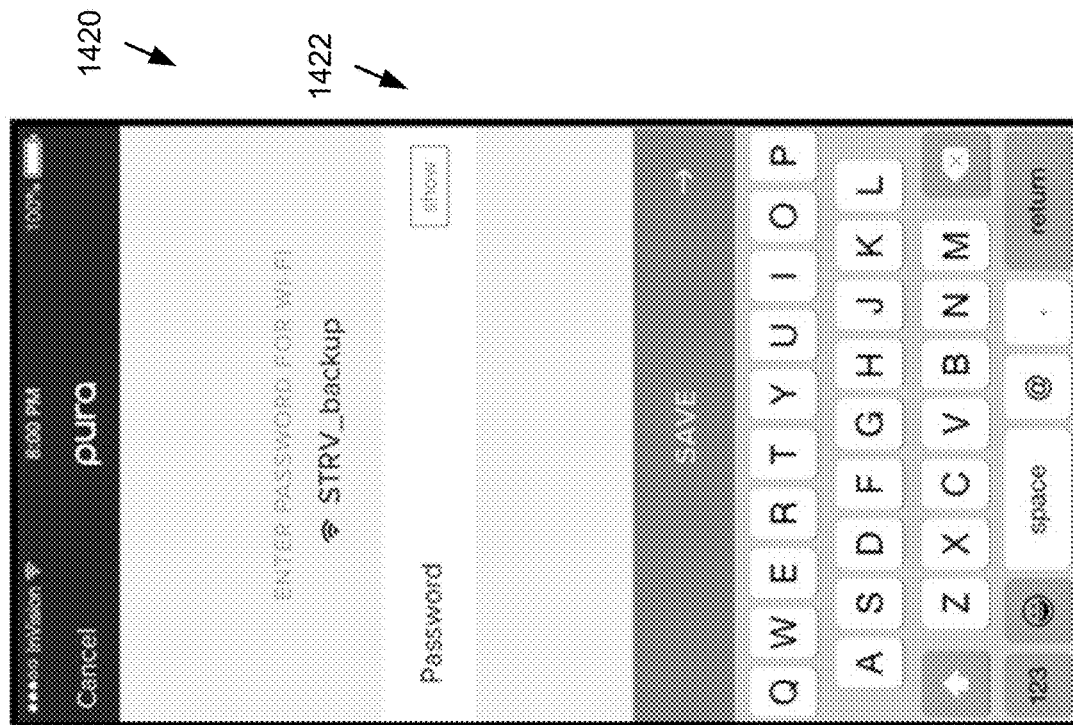


Figure 14E

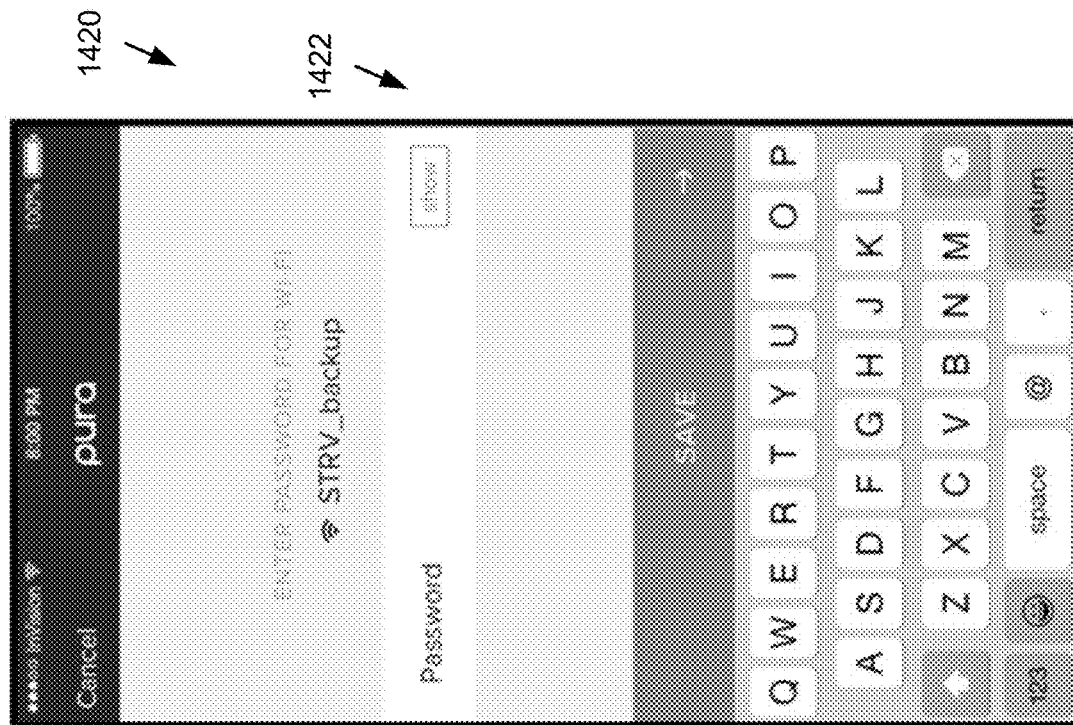


Figure 14F

U.S. Patent

Jan. 4, 2022

Sheet 25 of 52

US 11,213,601 B2

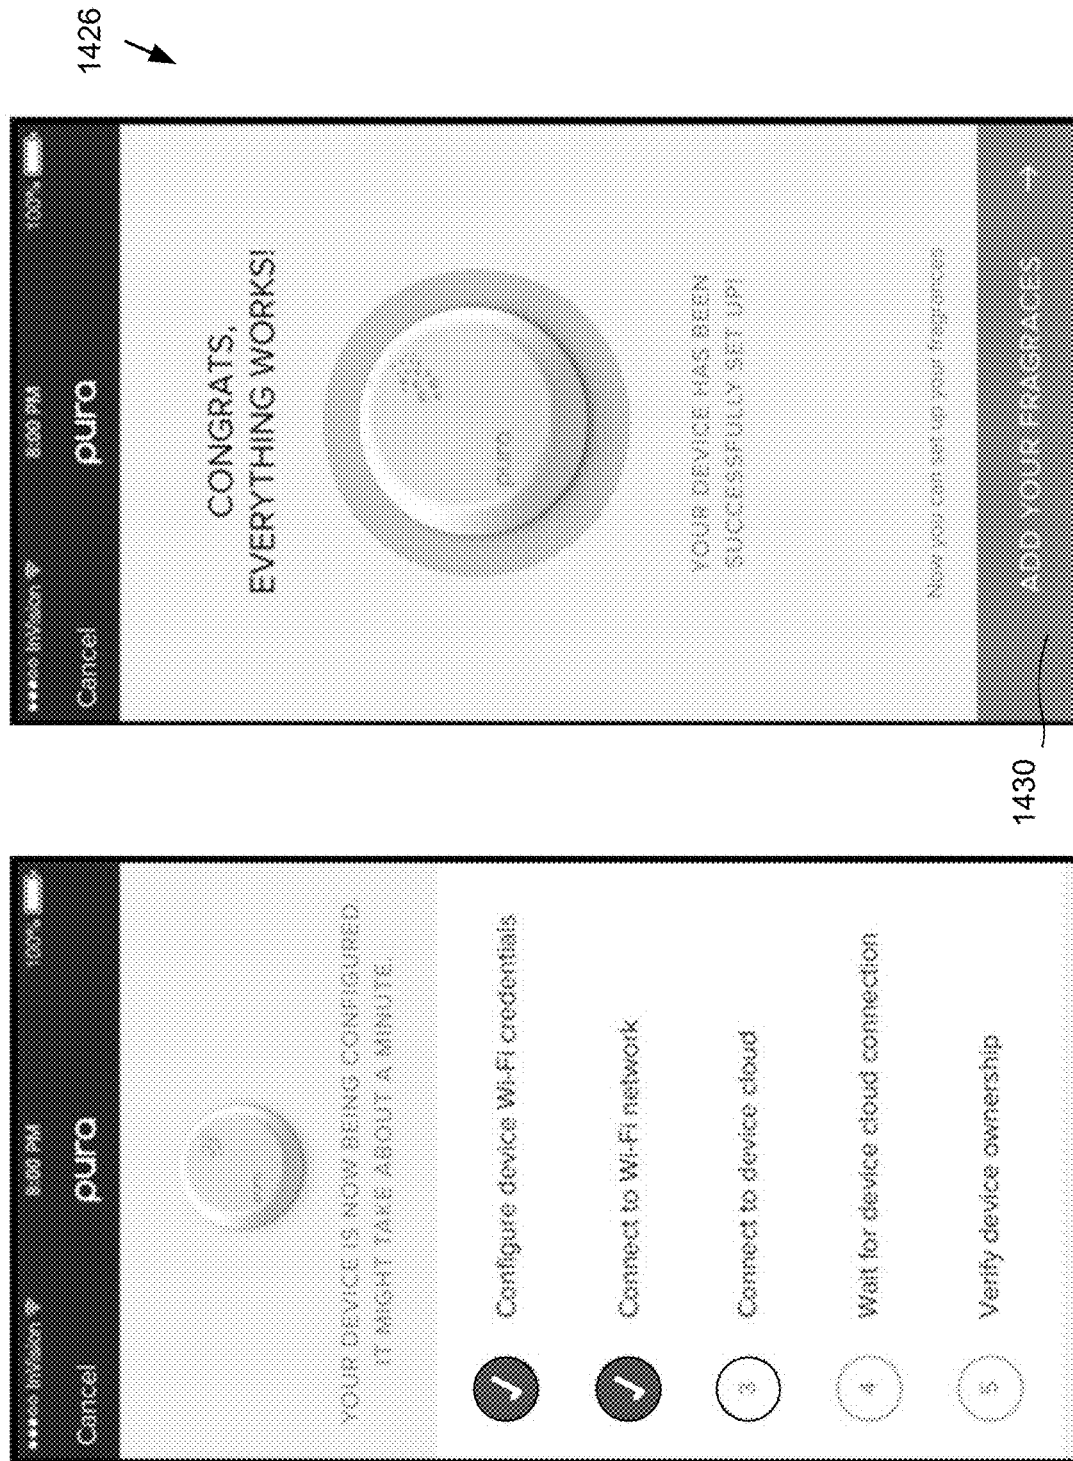


Figure 14H

Figure 14G

U.S. Patent

Jan. 4, 2022

Sheet 26 of 52

US 11,213,601 B2

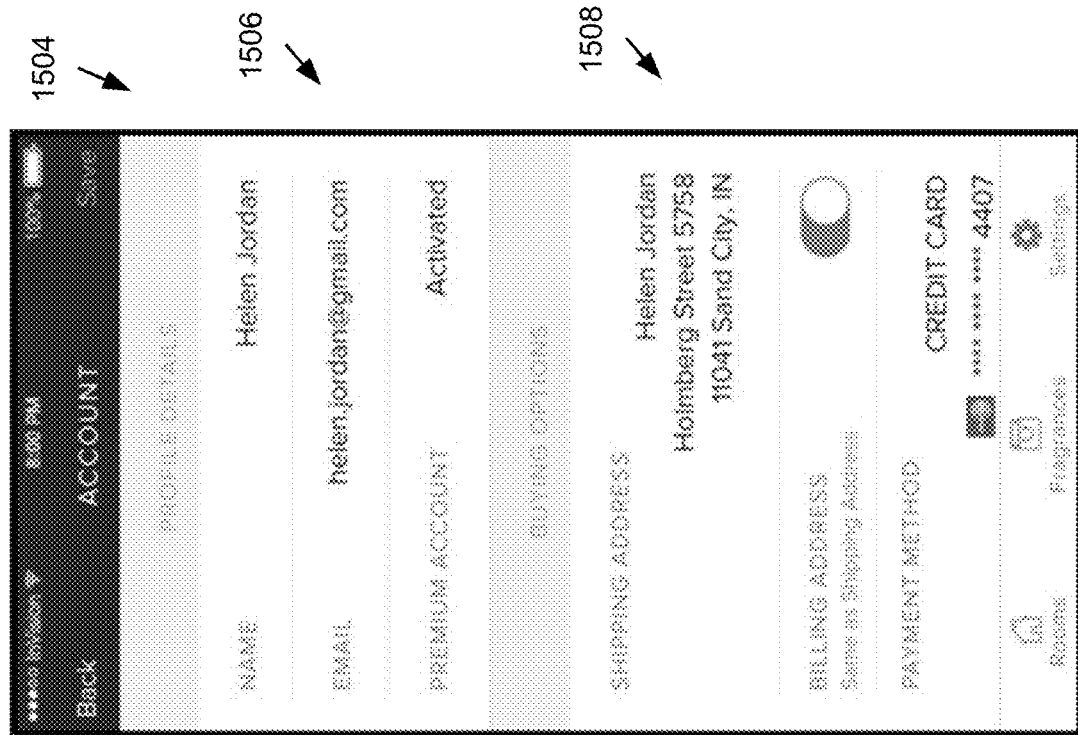


Figure 15B

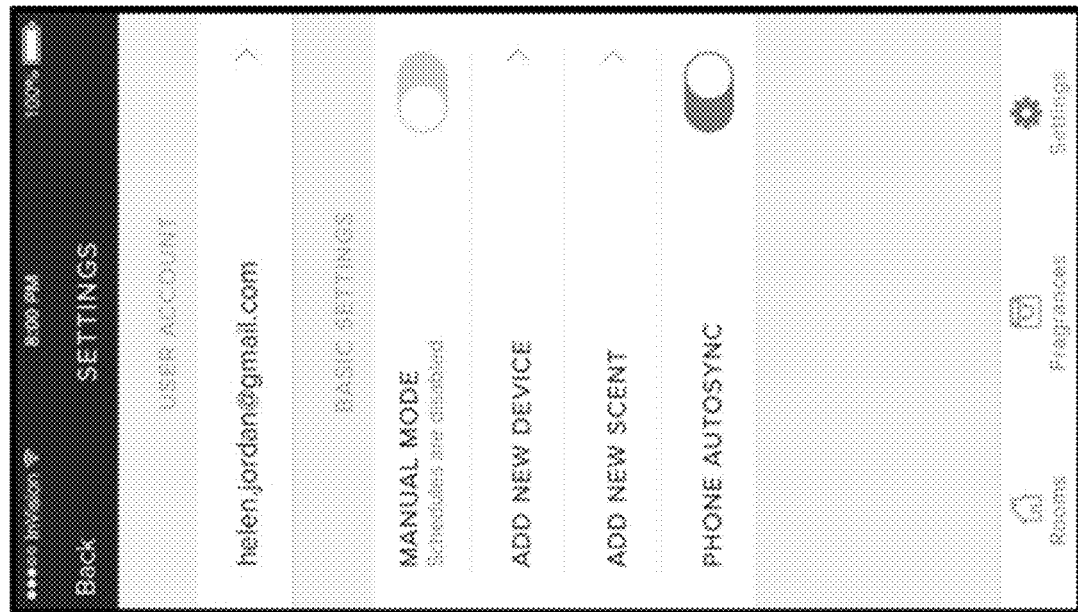


Figure 15A

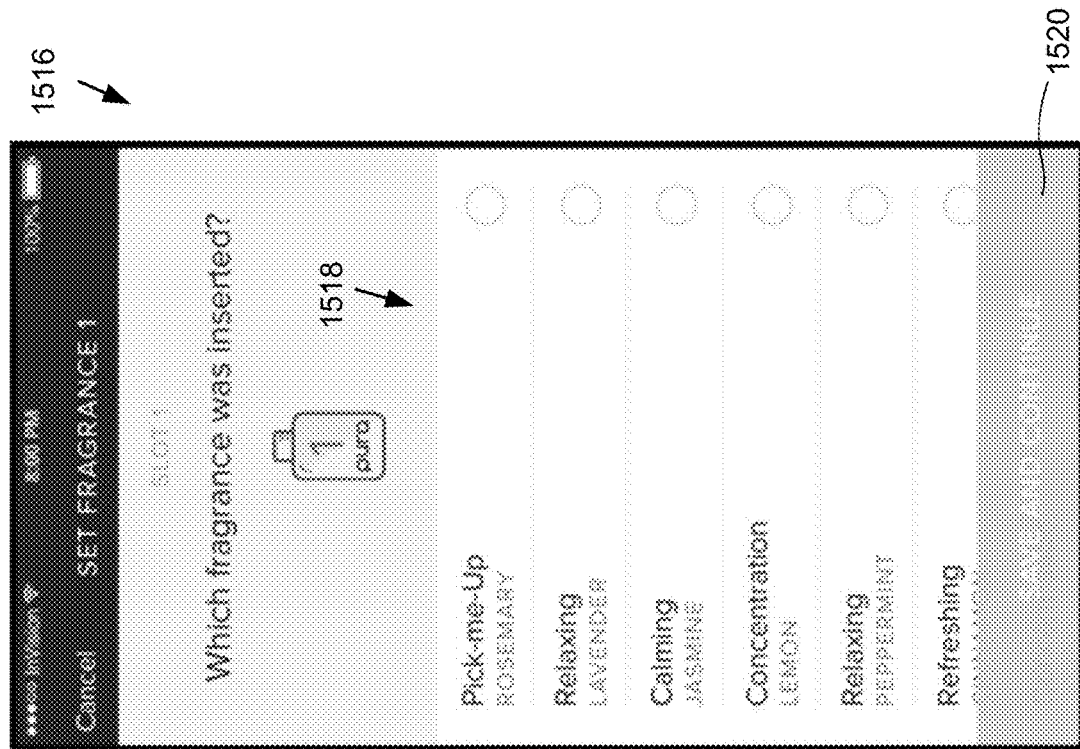


Figure 15D

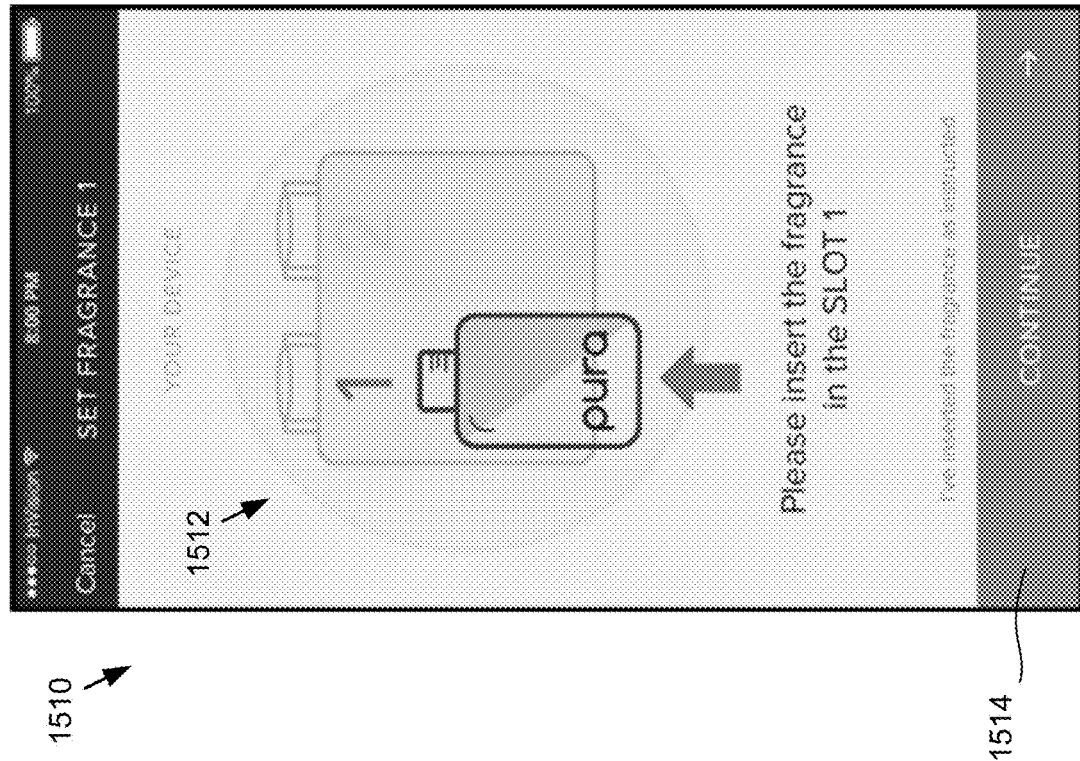


Figure 15C

U.S. Patent

Jan. 4, 2022

Sheet 28 of 52

US 11,213,601 B2

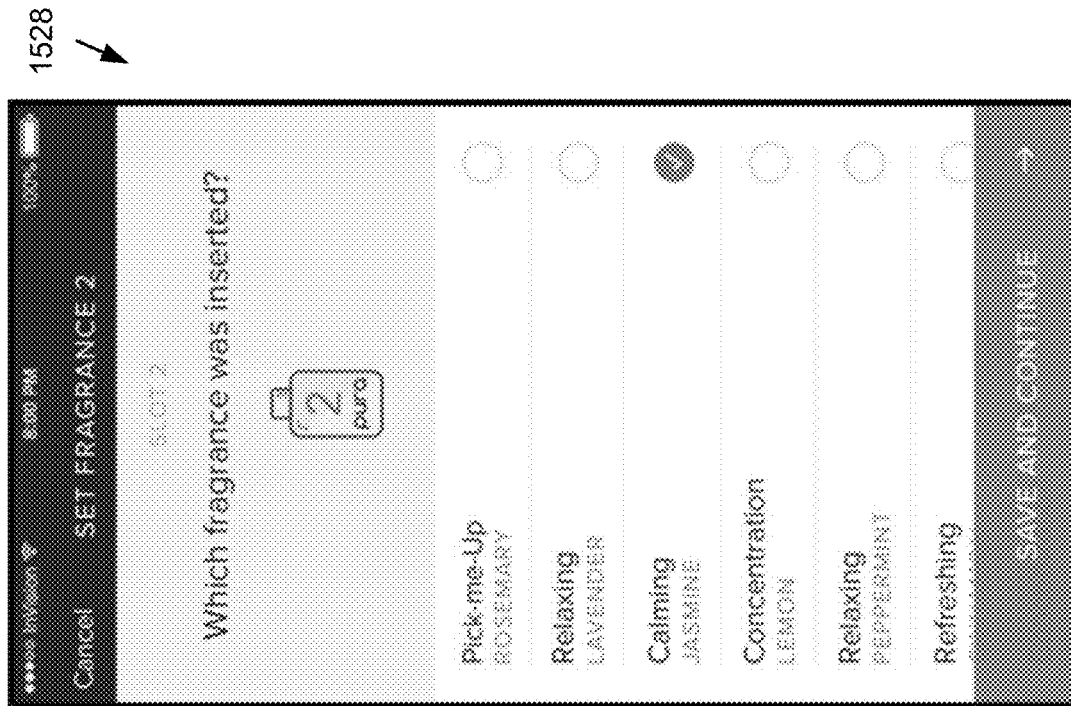


Figure 15F

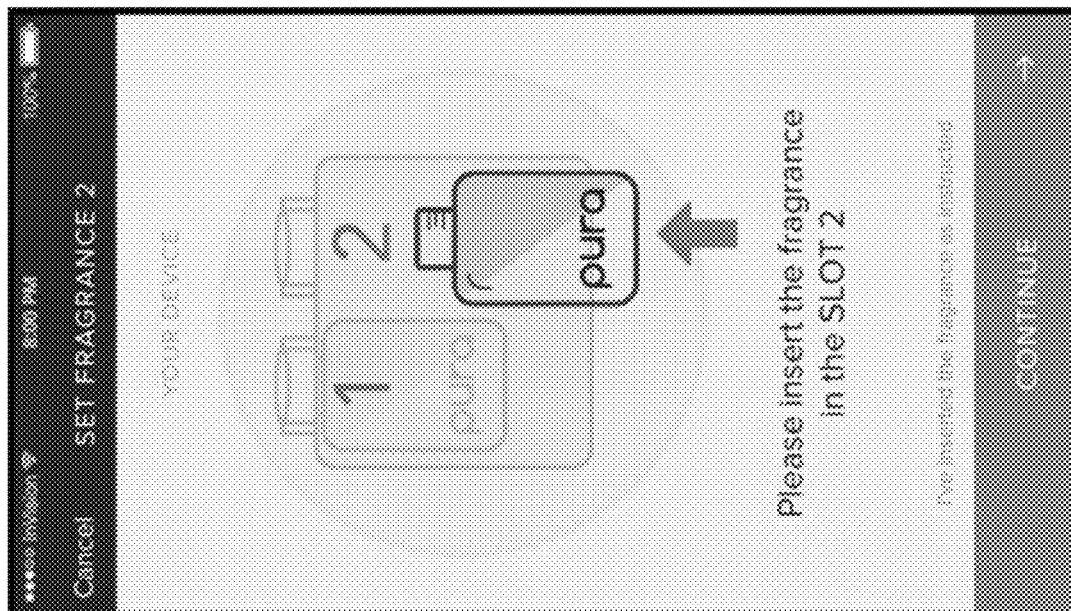


Figure 15E

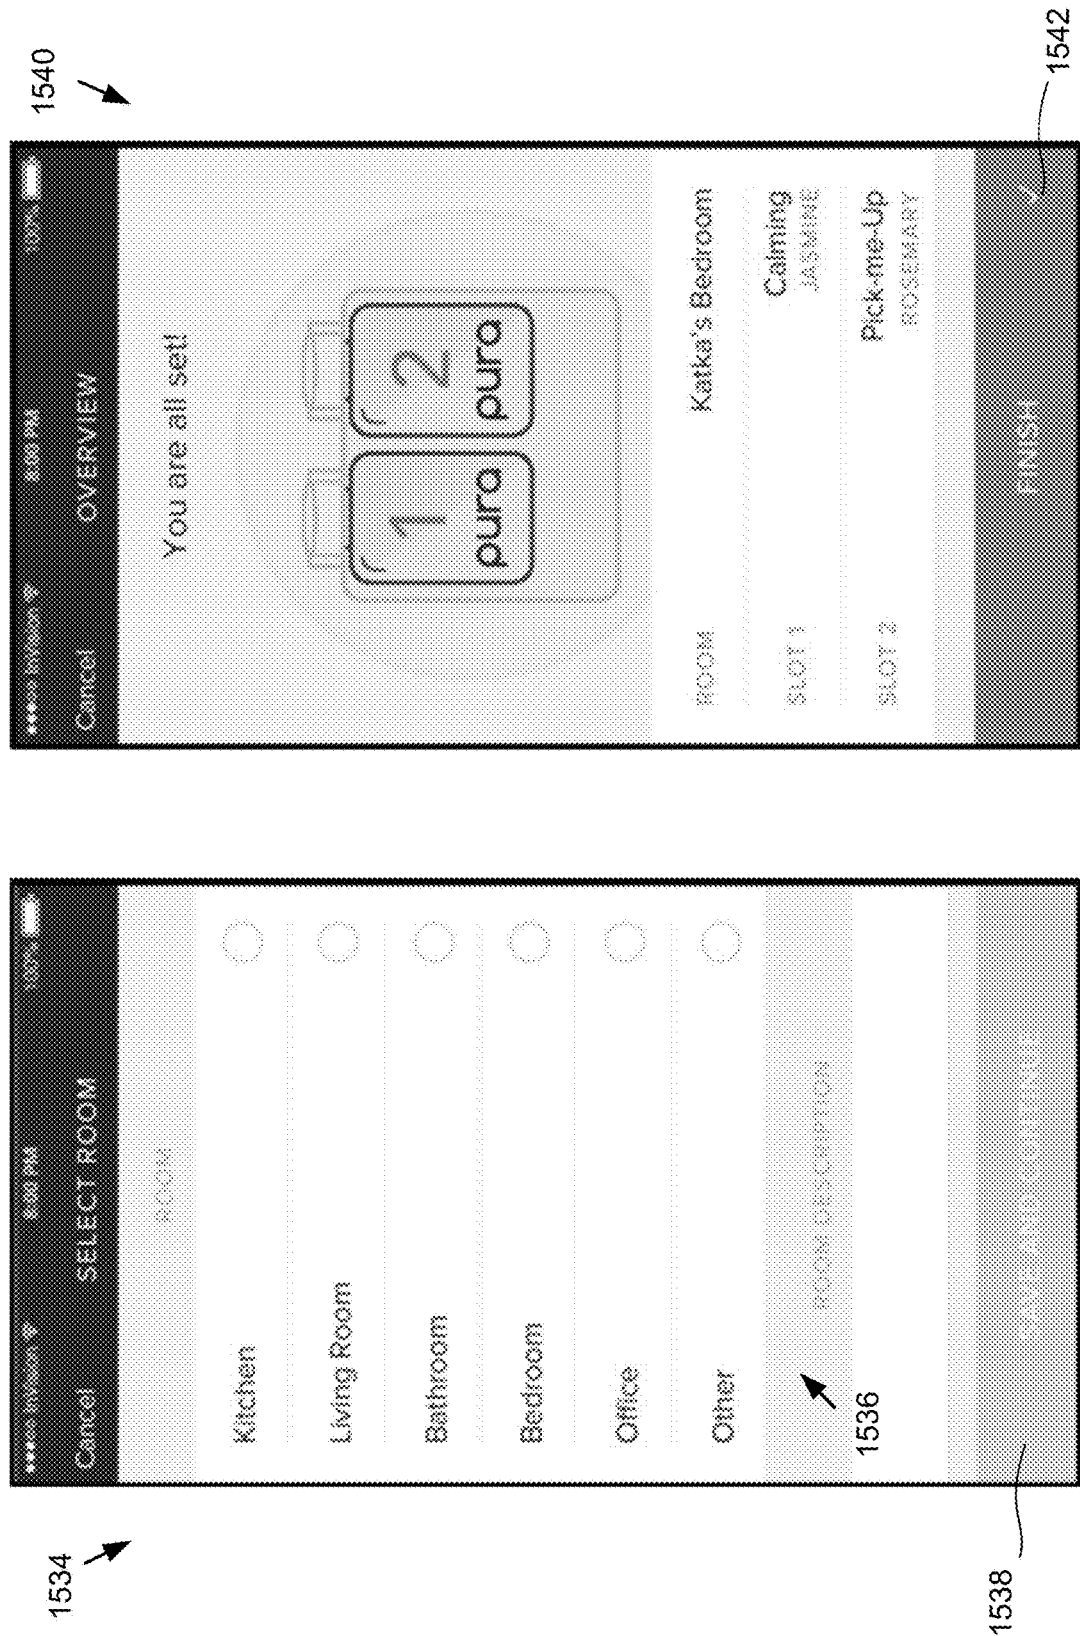


Figure 15H

Figure 15G

U.S. Patent

Jan. 4, 2022

Sheet 30 of 52

US 11,213,601 B2

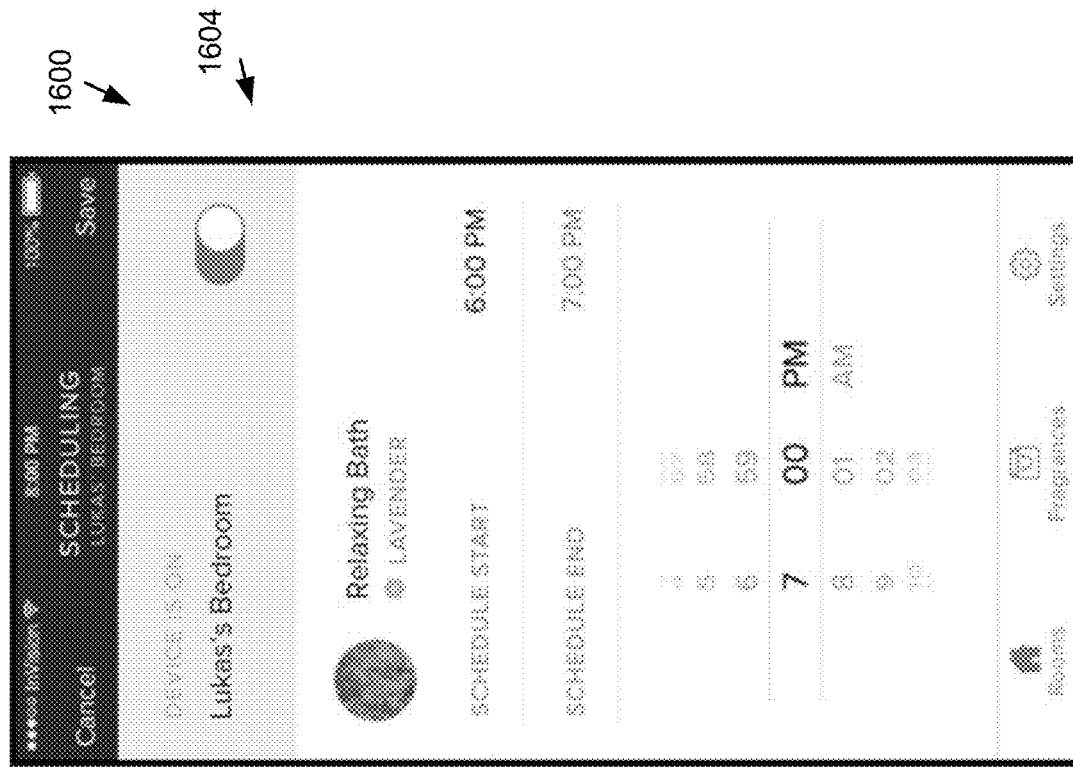


Figure 16B

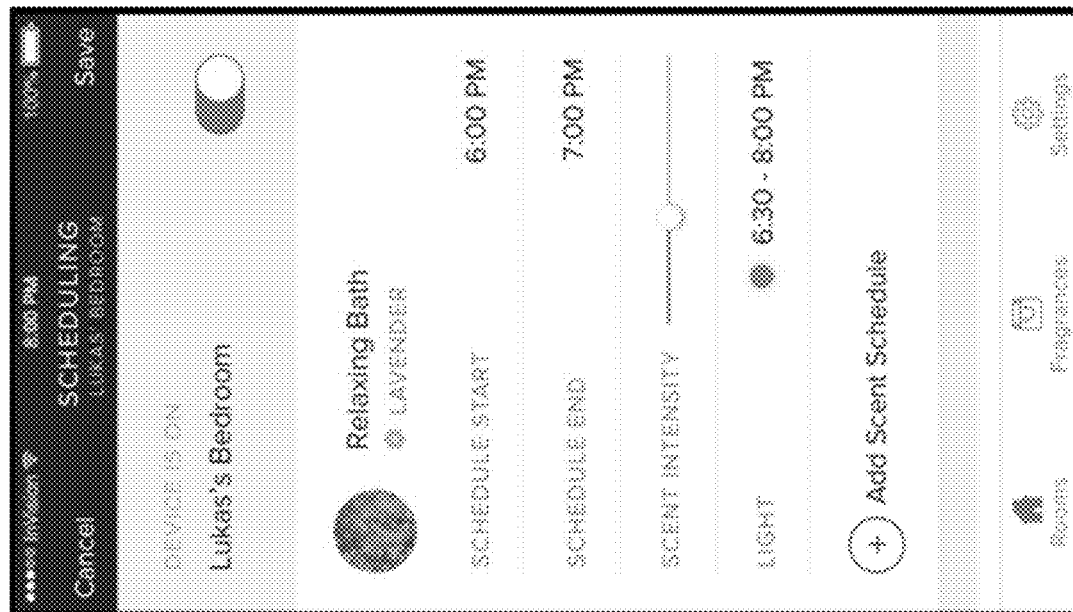


Figure 16A

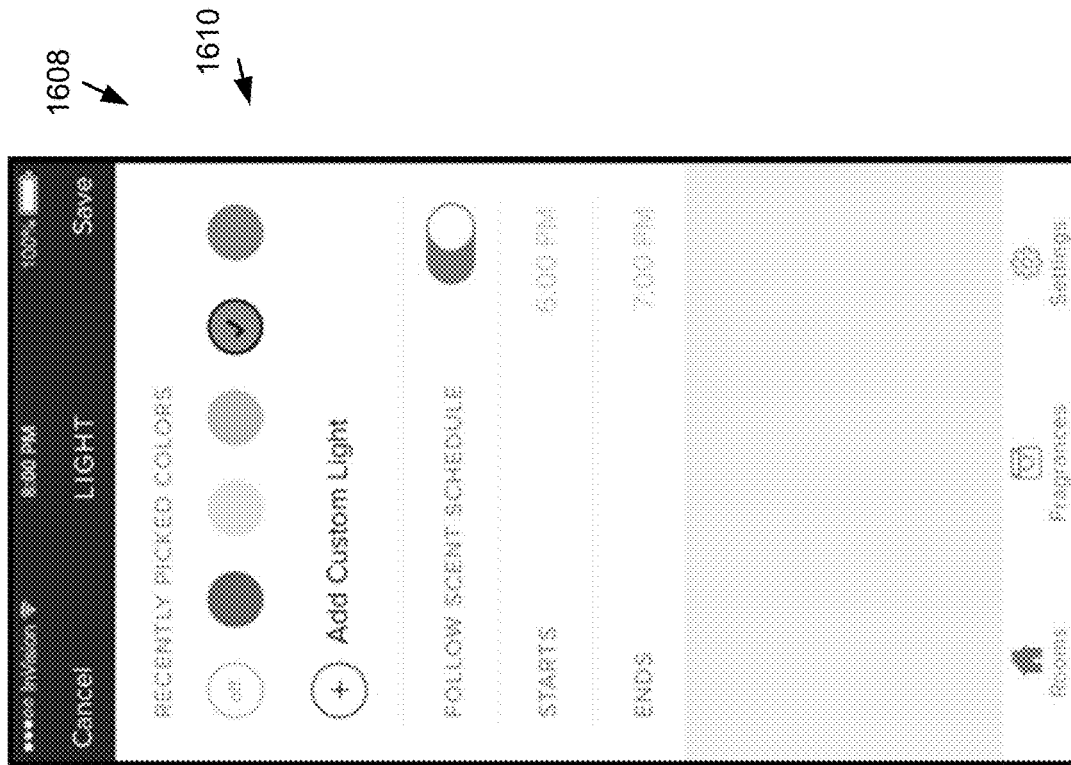


Figure 16D

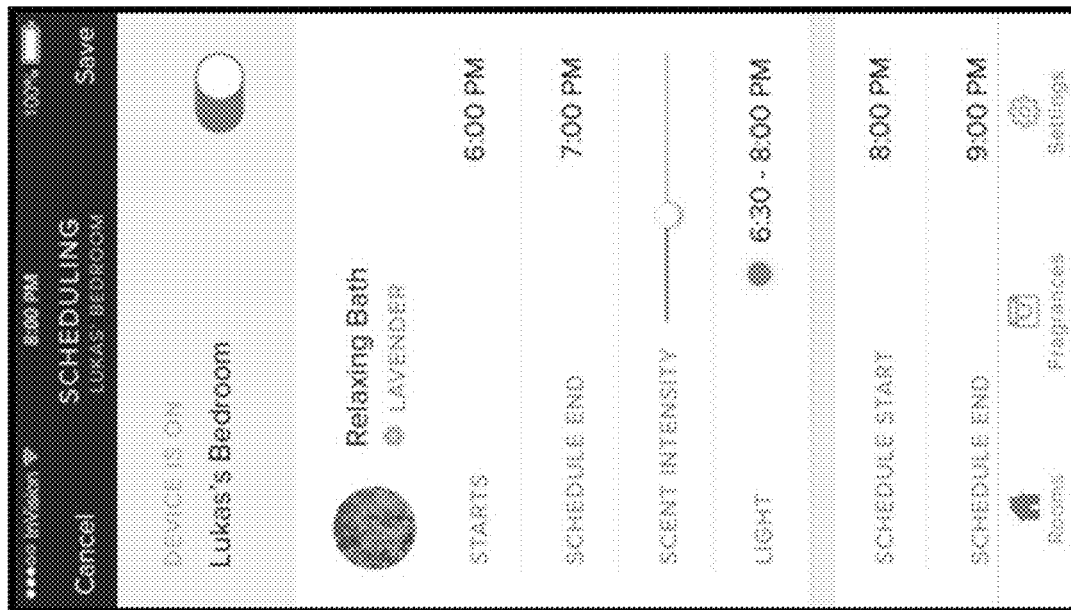


Figure 16C

U.S. Patent

Jan. 4, 2022

Sheet 32 of 52

US 11,213,601 B2

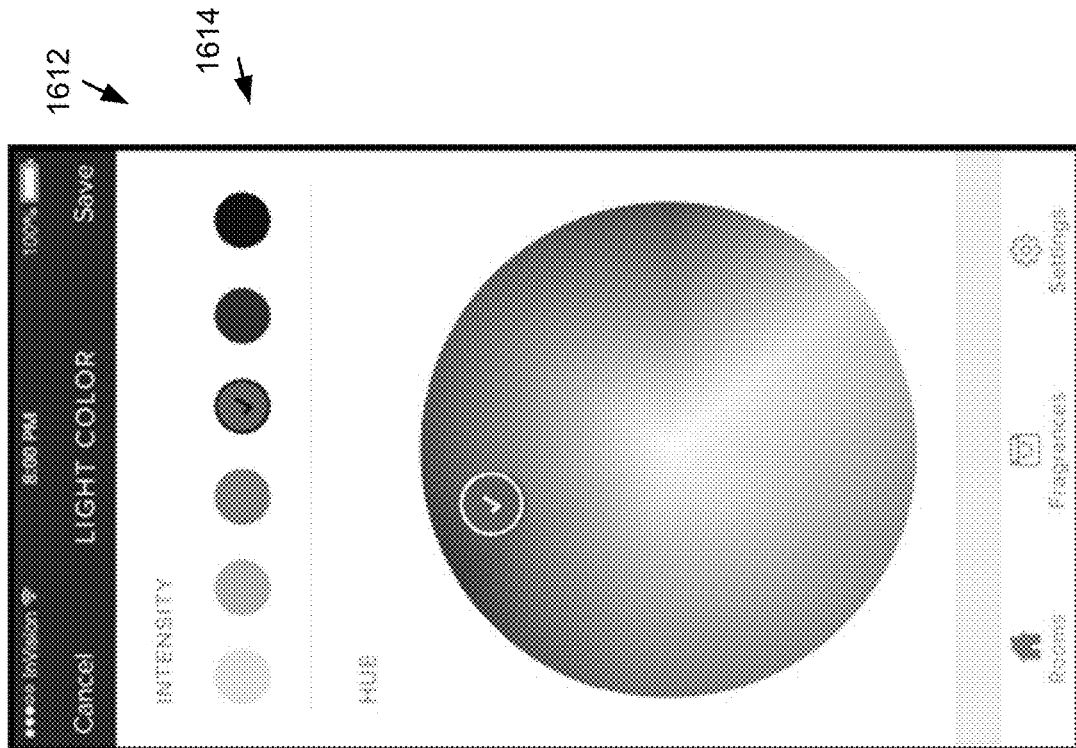


Figure 16E

U.S. Patent

Jan. 4, 2022

Sheet 33 of 52

US 11,213,601 B2

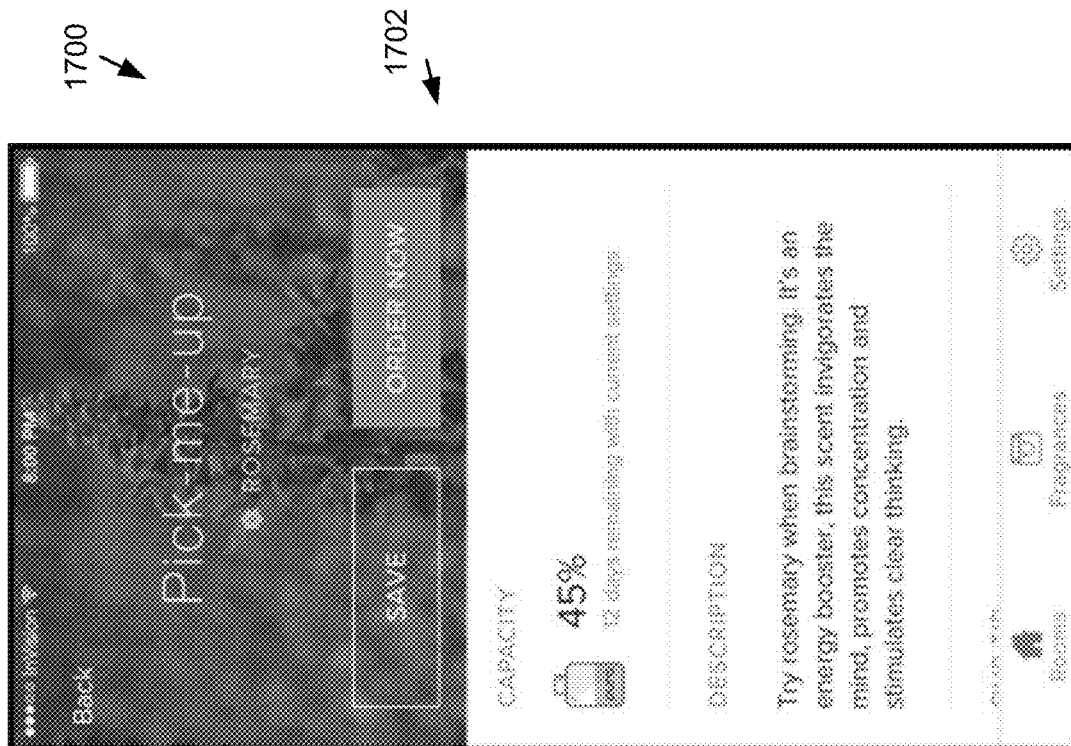


Figure 17

U.S. Patent

Jan. 4, 2022

Sheet 34 of 52

US 11,213,601 B2

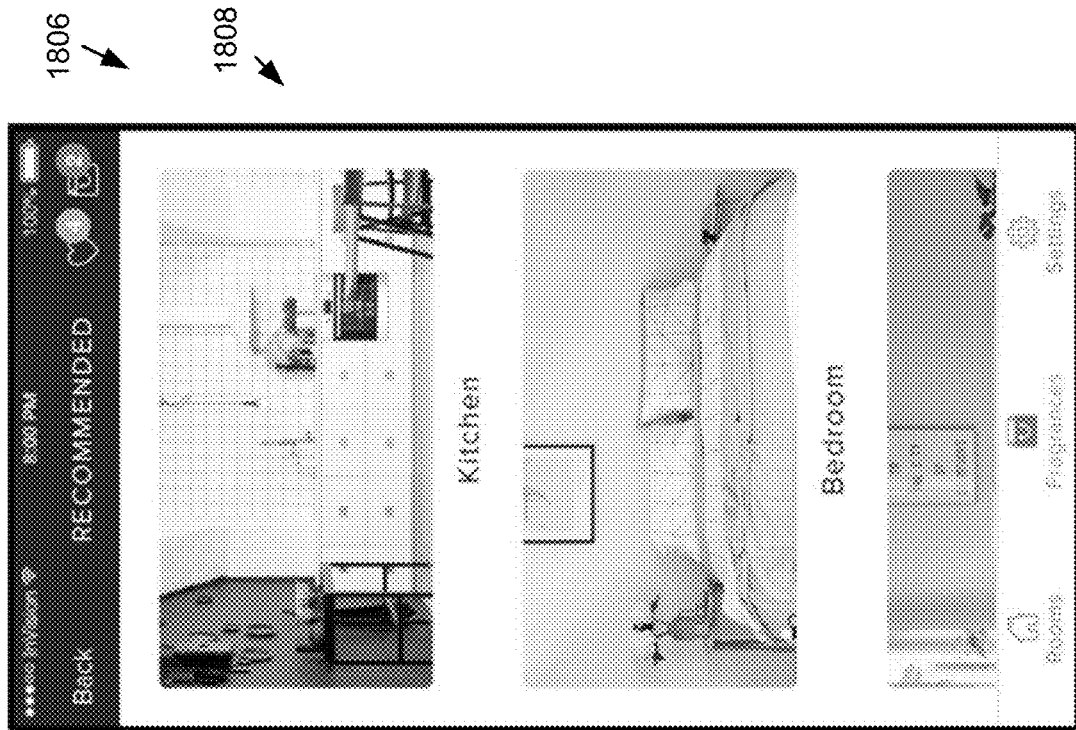


Figure 18B

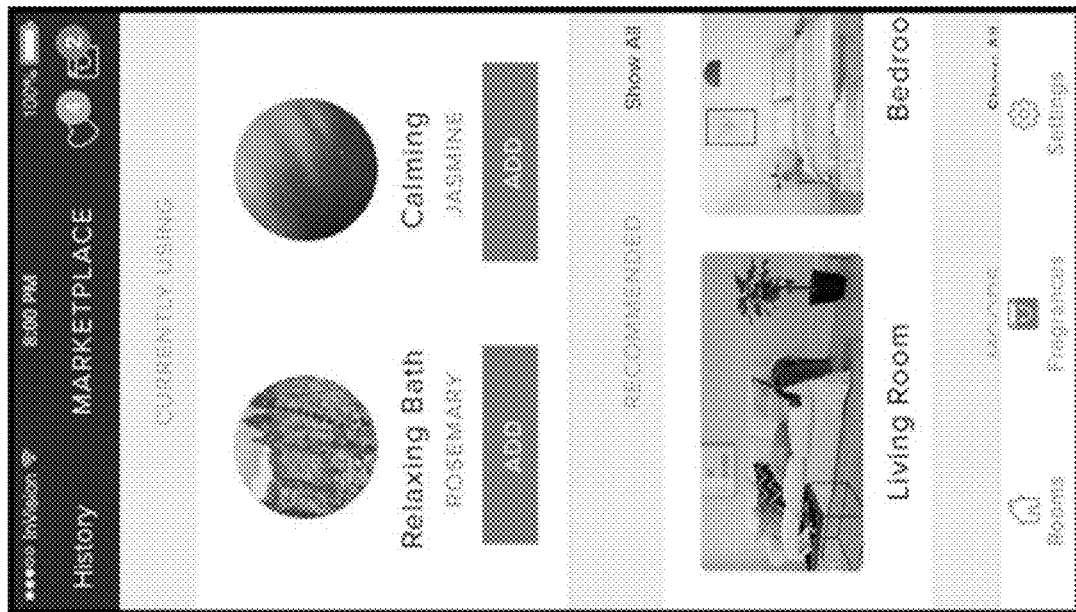


Figure 18A

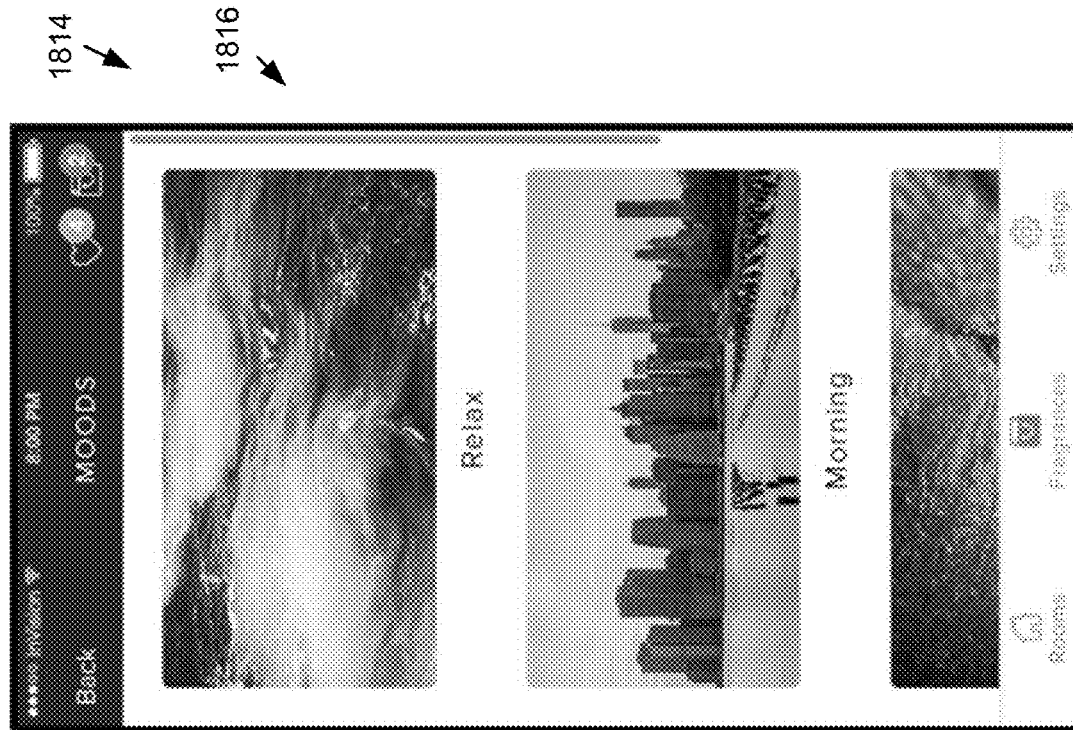


Figure 18D

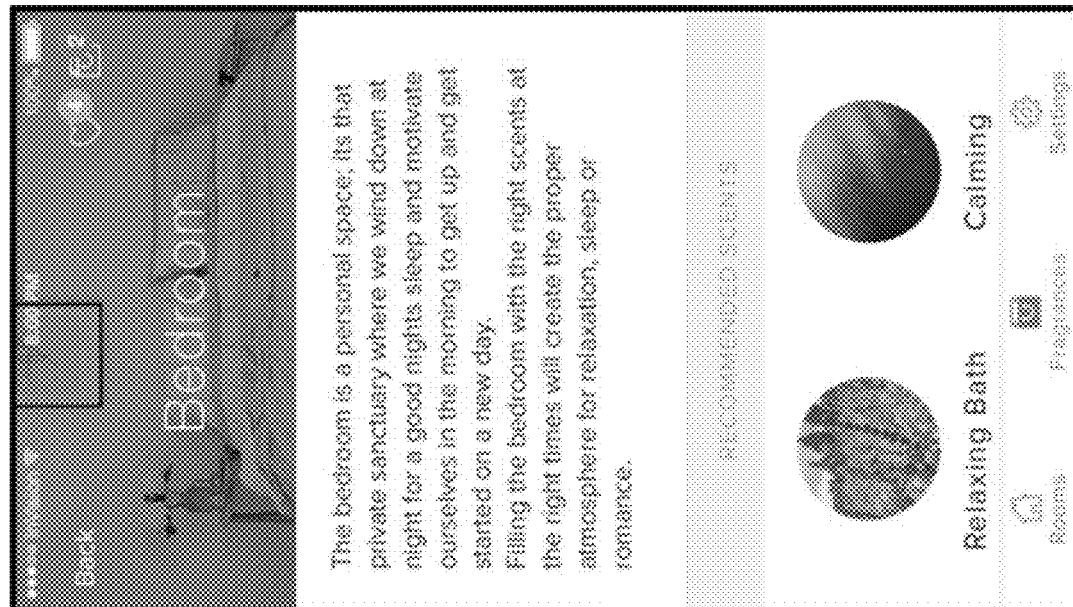


Figure 18C

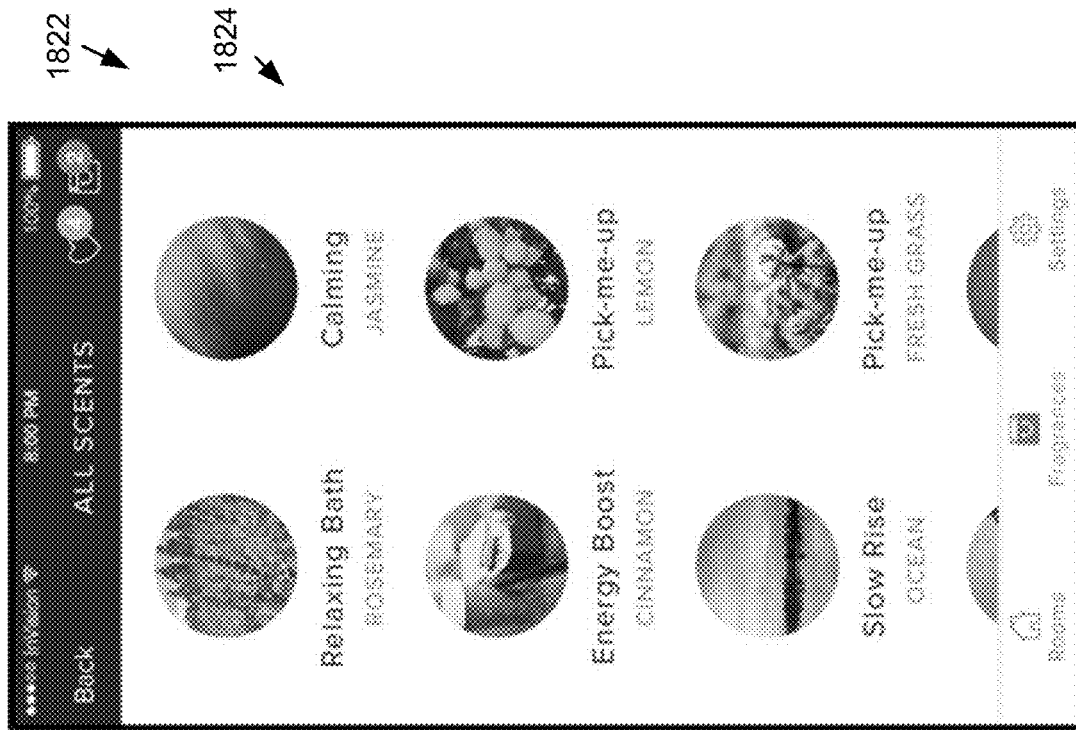


Figure 18E

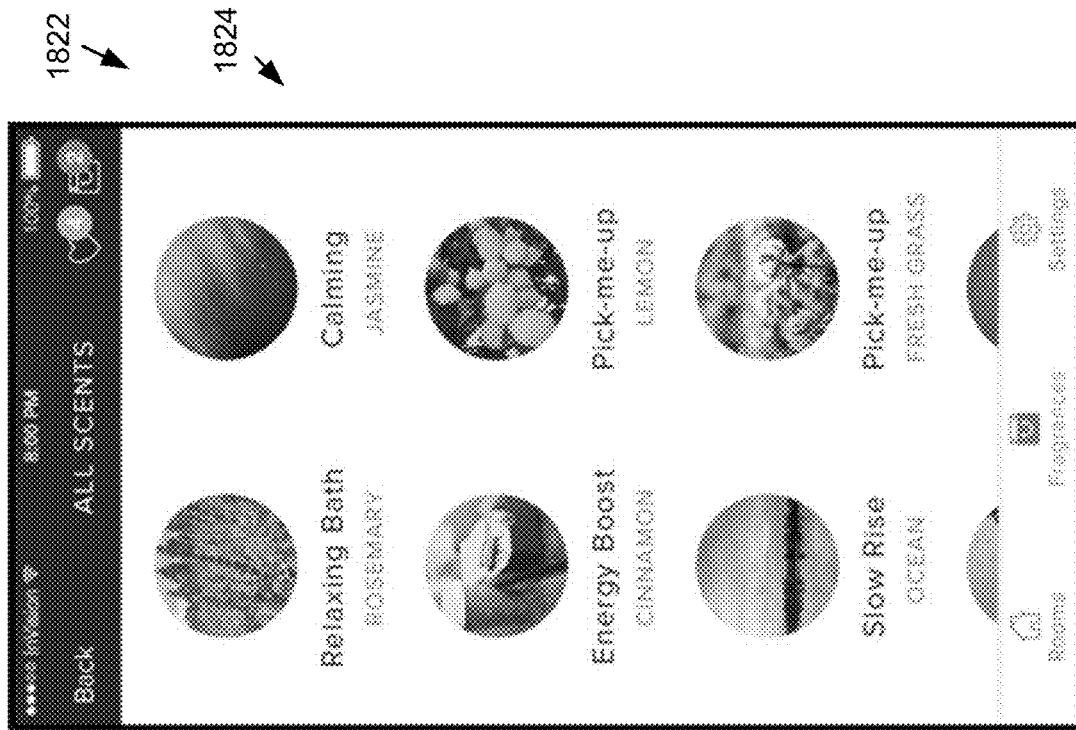


Figure 18F

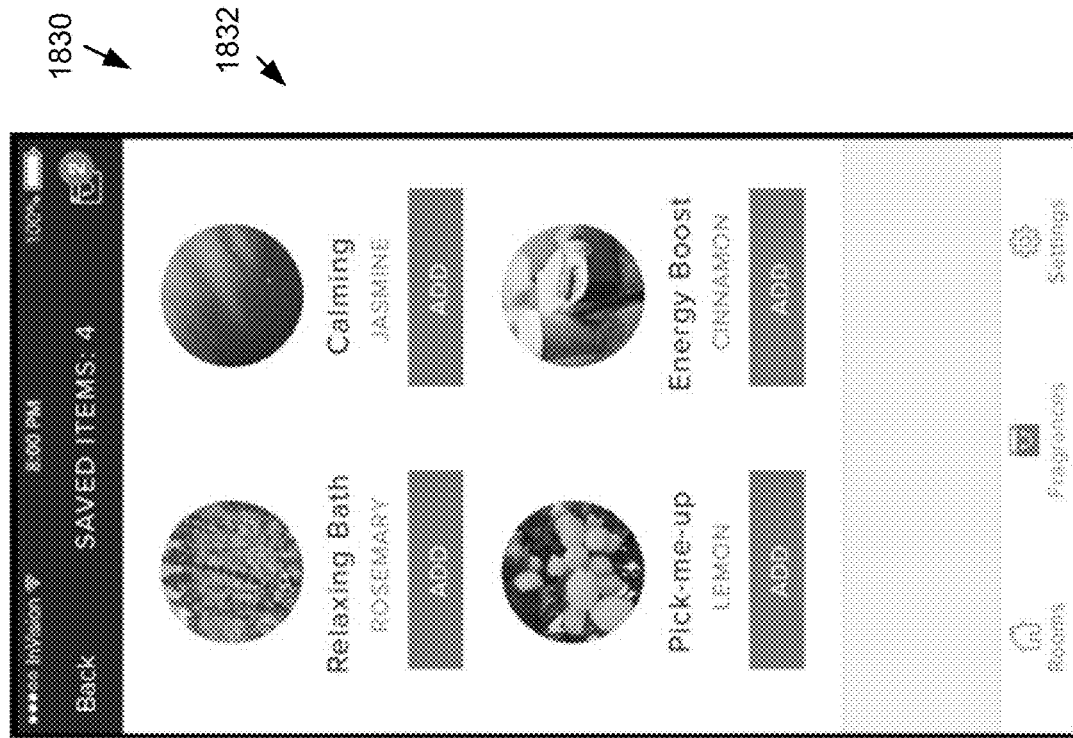


Figure 18H

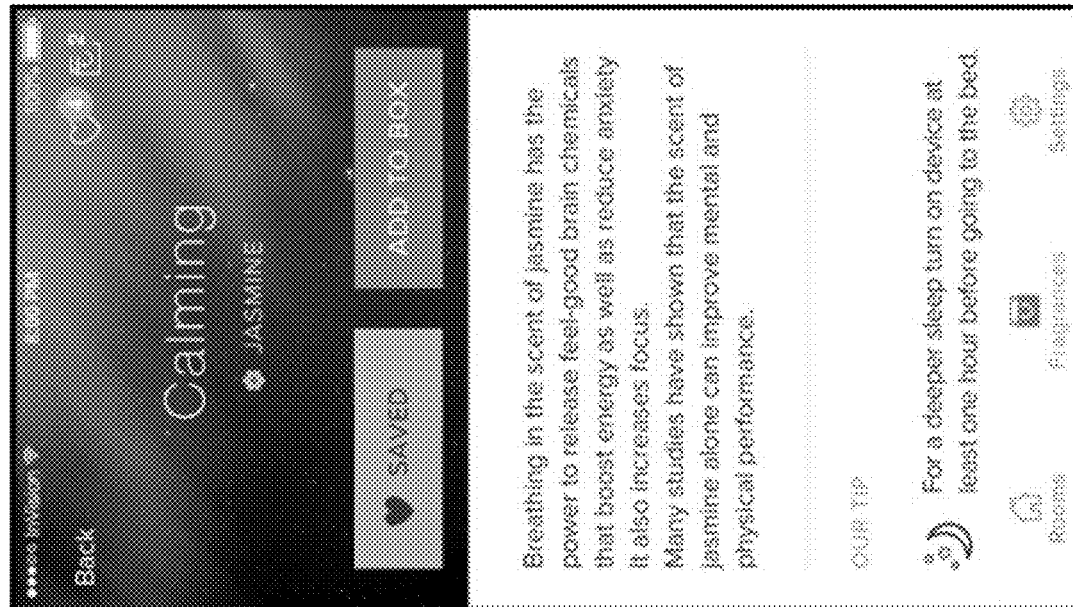


Figure 18G

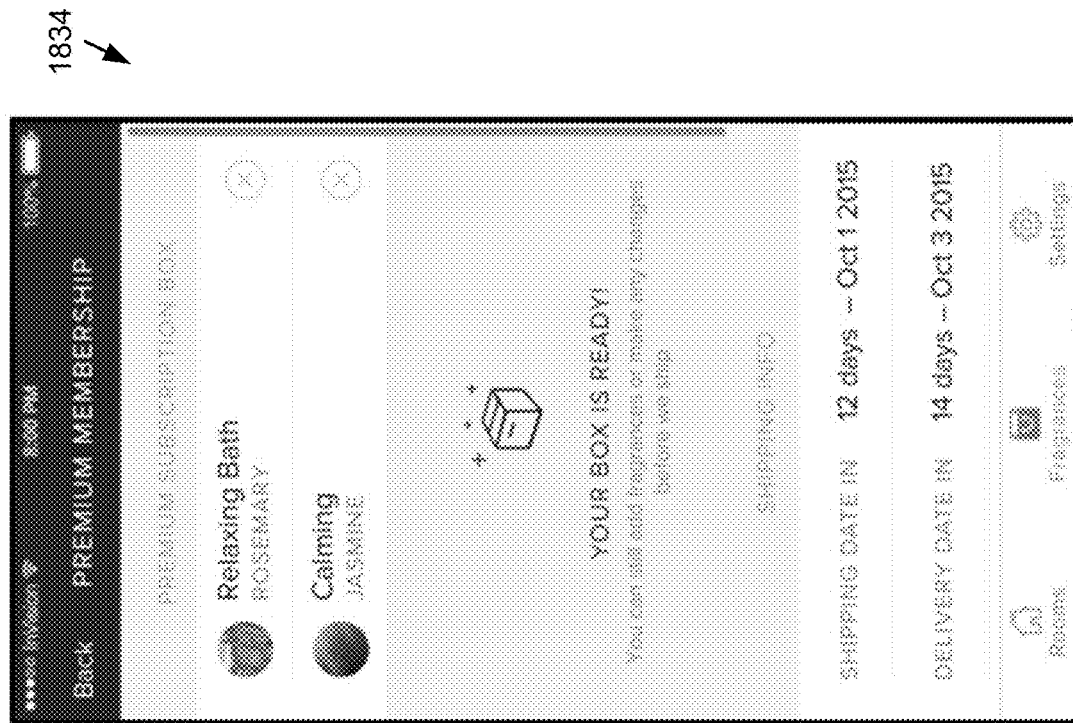


Figure 18J

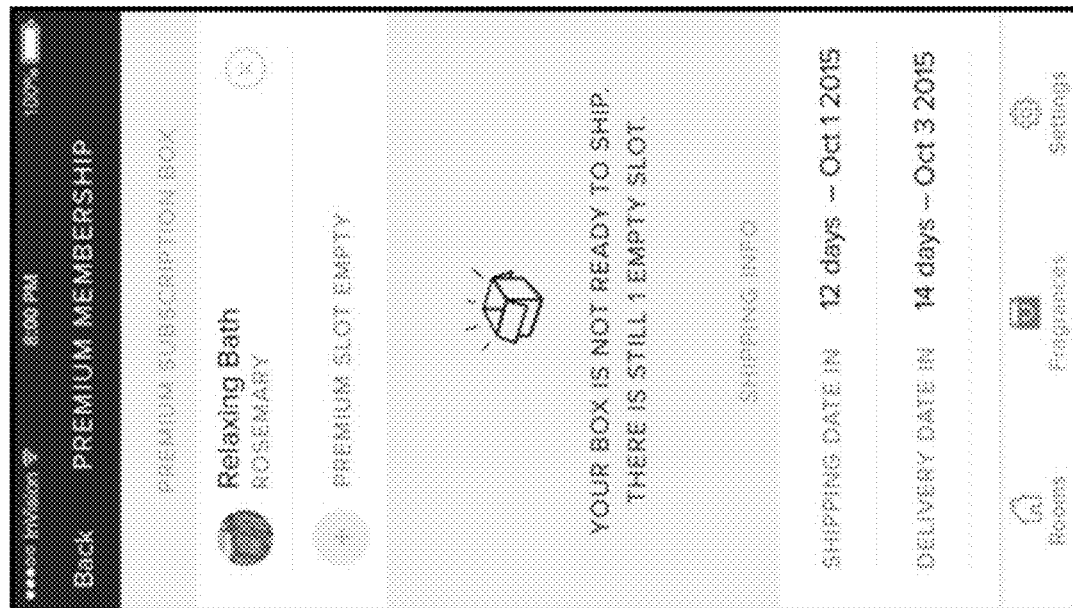


Figure 18I

U.S. Patent

Jan. 4, 2022

Sheet 39 of 52

US 11,213,601 B2

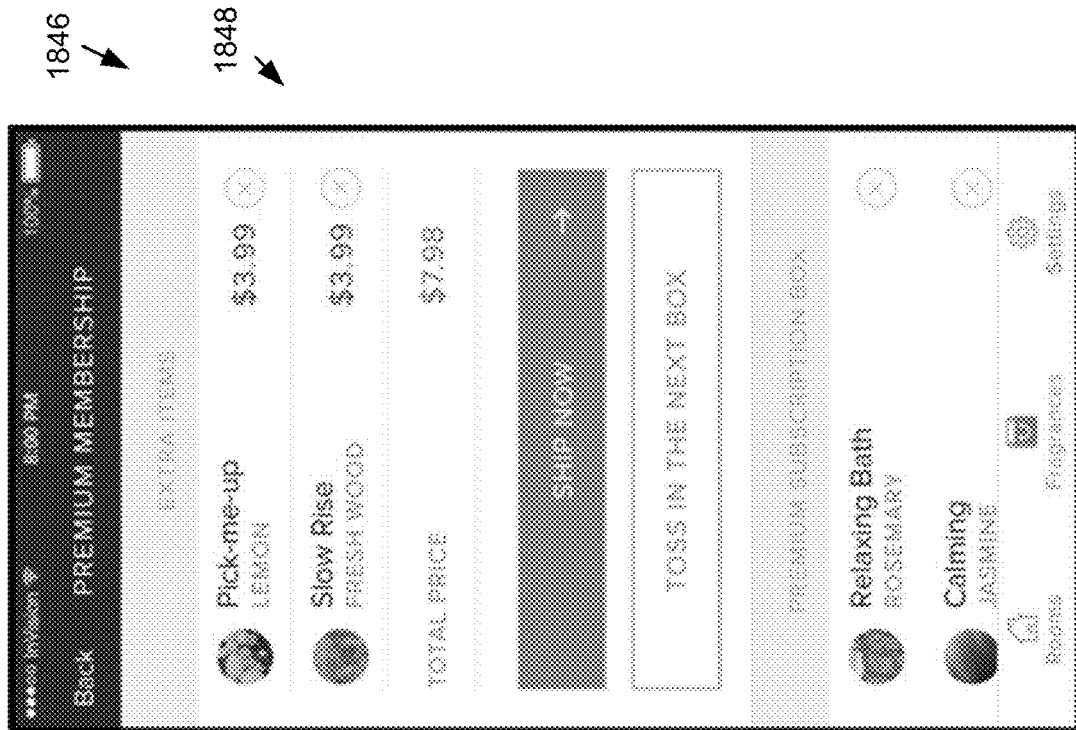


Figure 18L

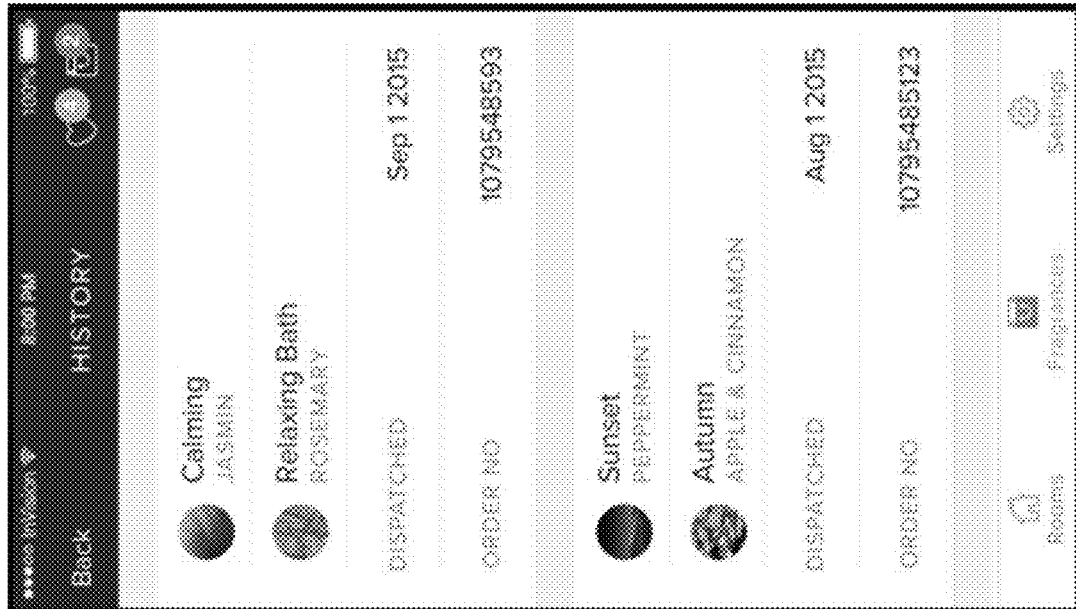


Figure 18K

U.S. Patent

Jan. 4, 2022

Sheet 40 of 52

US 11,213,601 B2

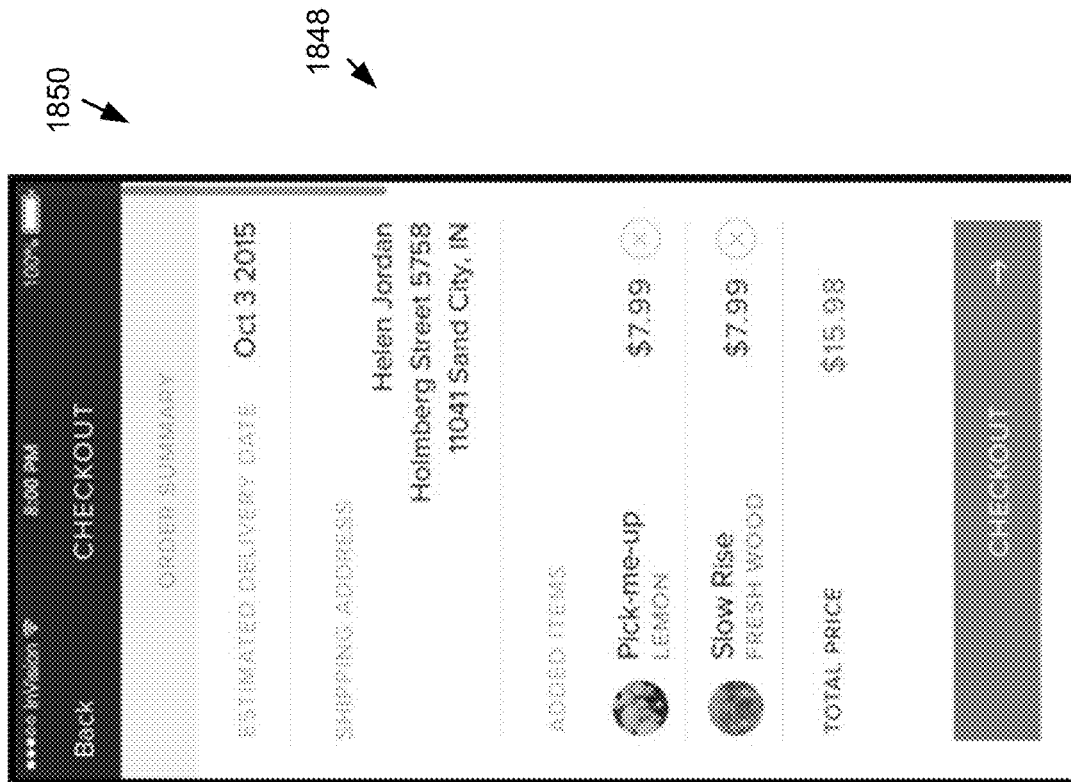


Figure 18M

U.S. Patent

Jan. 4, 2022

Sheet 41 of 52

US 11,213,601 B2

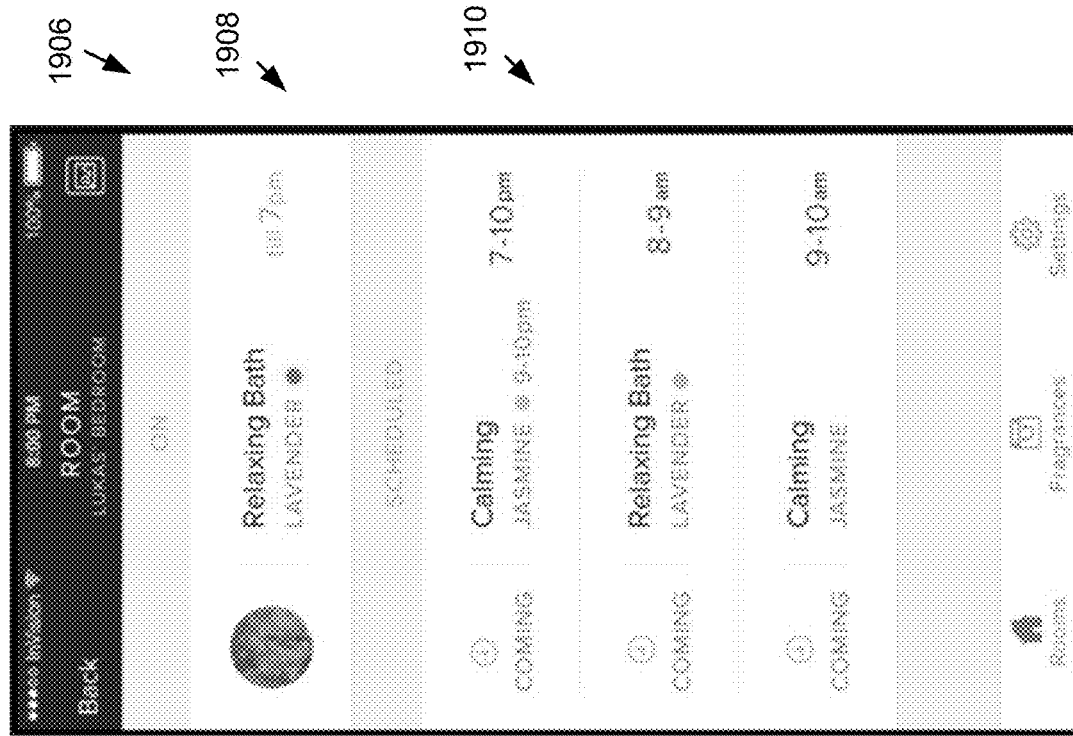


Figure 19A

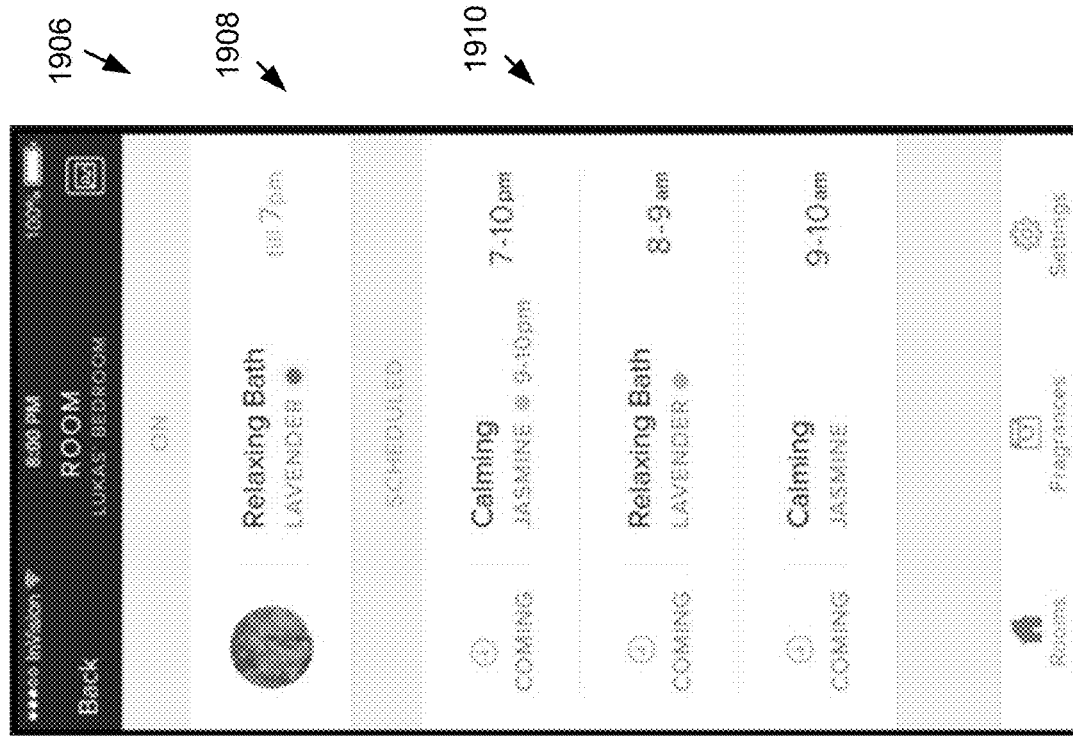


Figure 19B

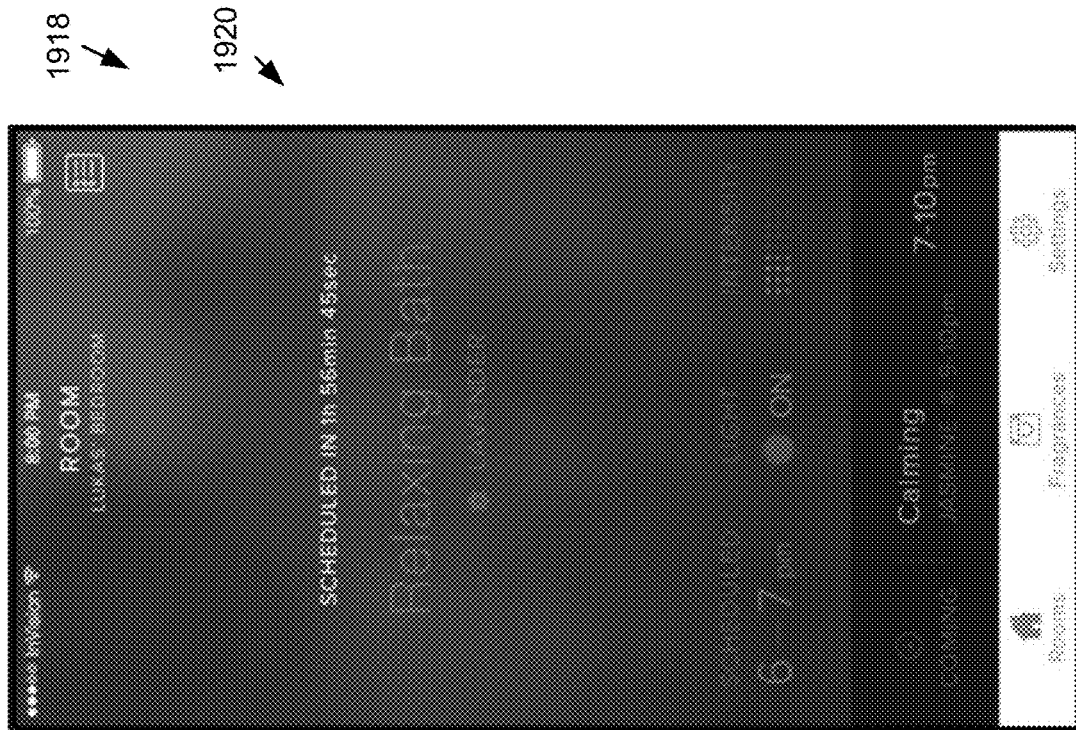


Figure 19D

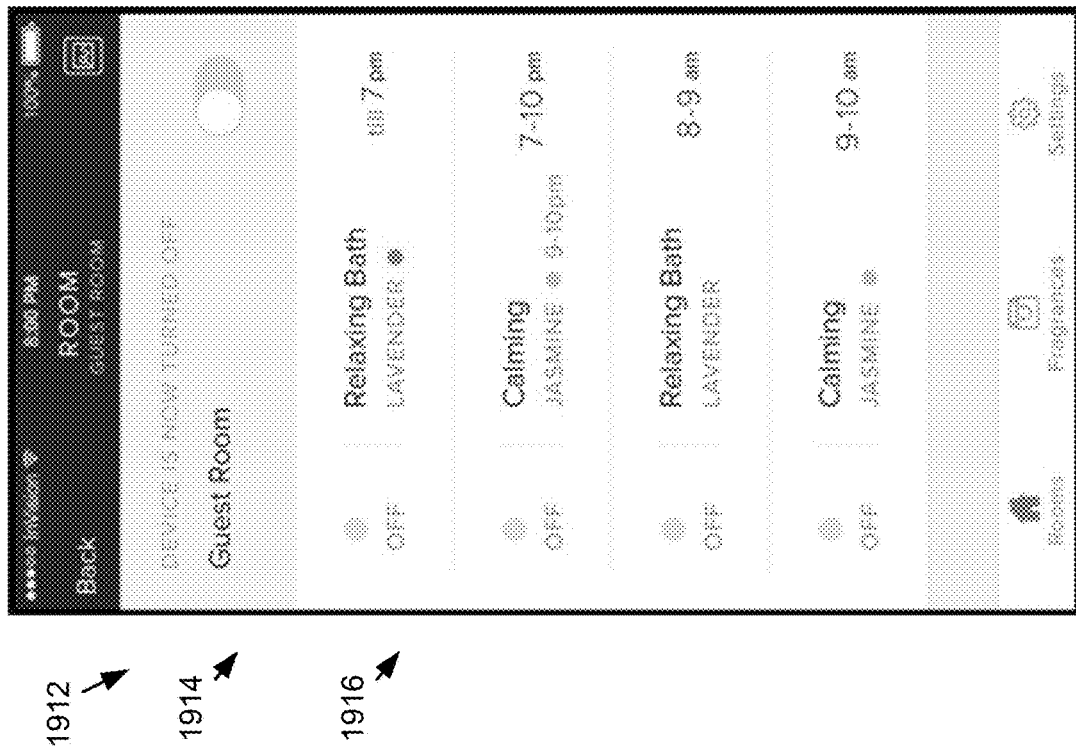


Figure 19C

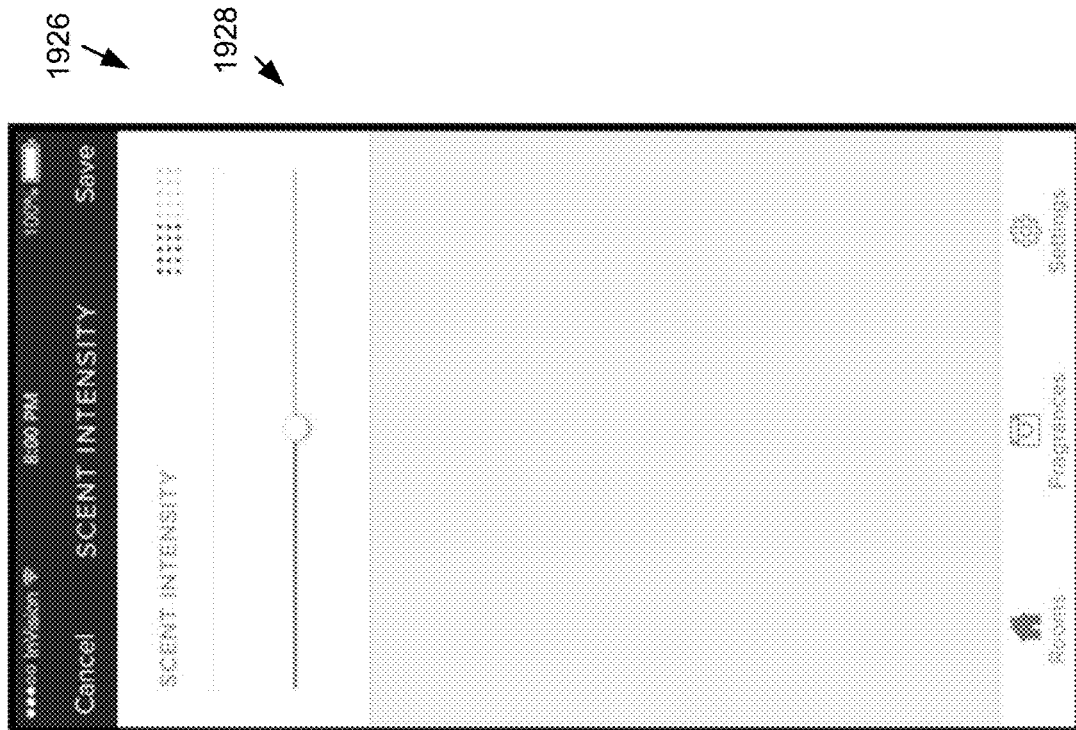


Figure 19F

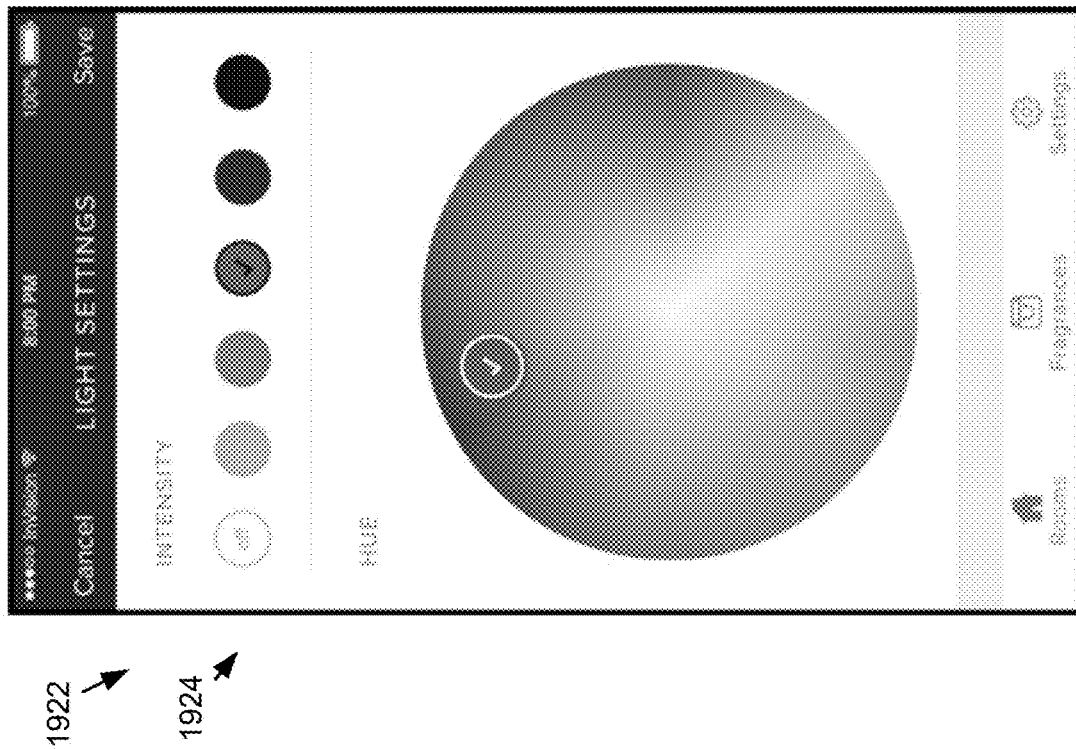


Figure 19E

U.S. Patent

Jan. 4, 2022

Sheet 44 of 52

US 11,213,601 B2

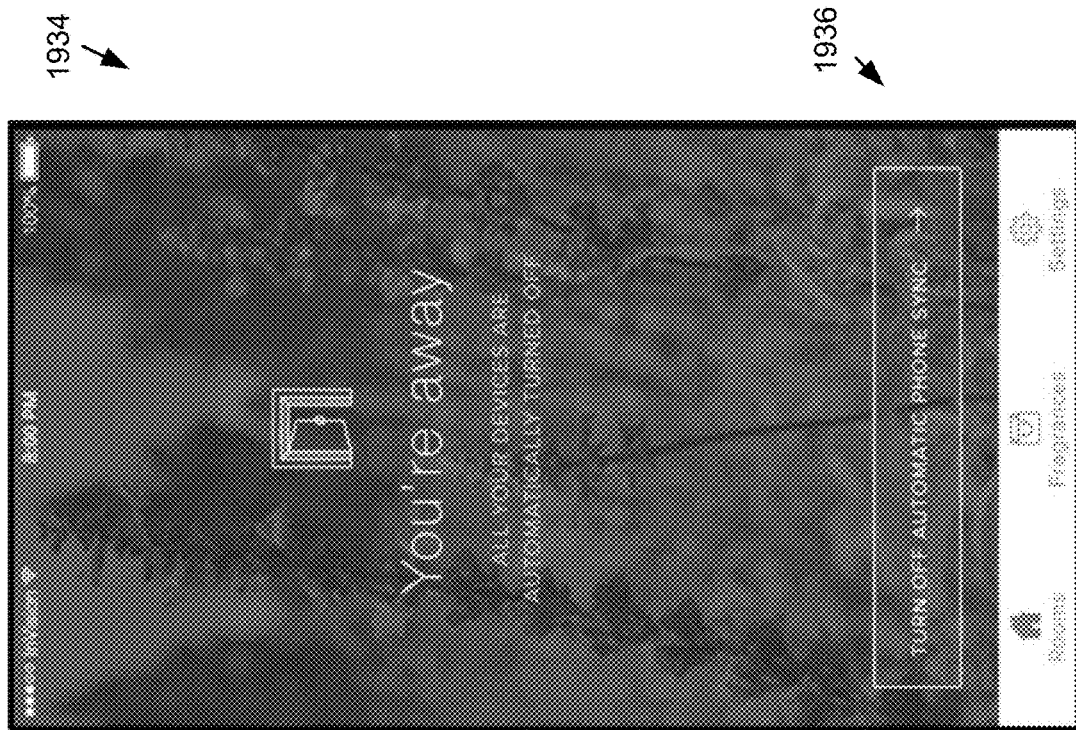


Figure 20B

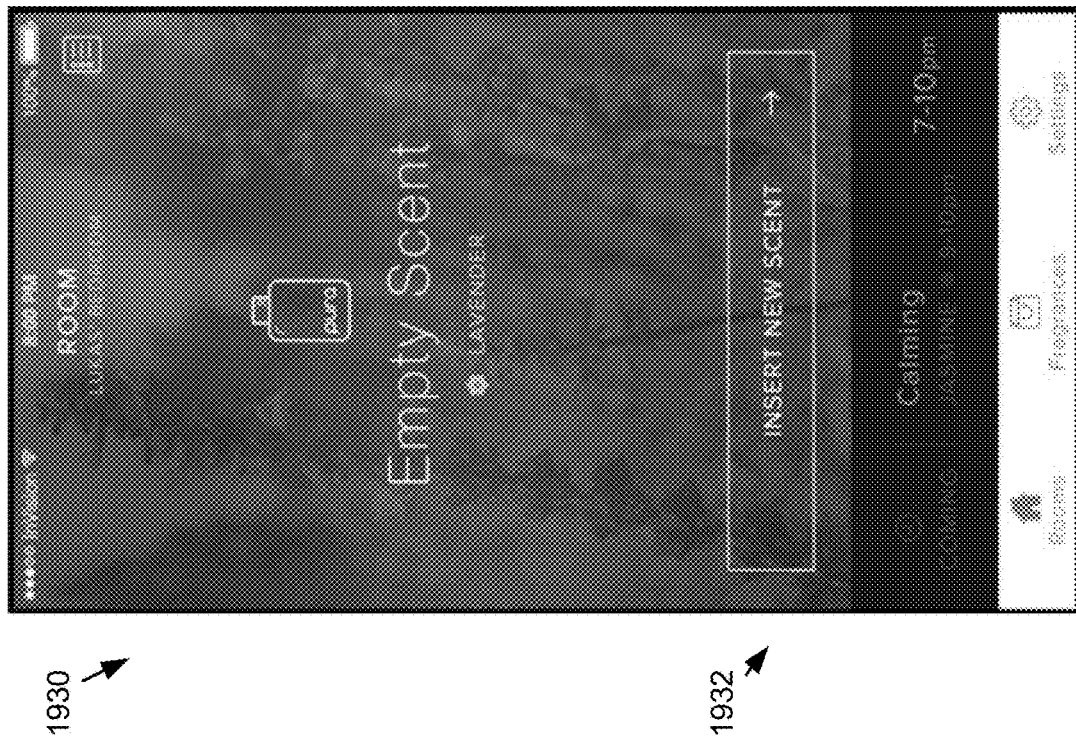


Figure 20A

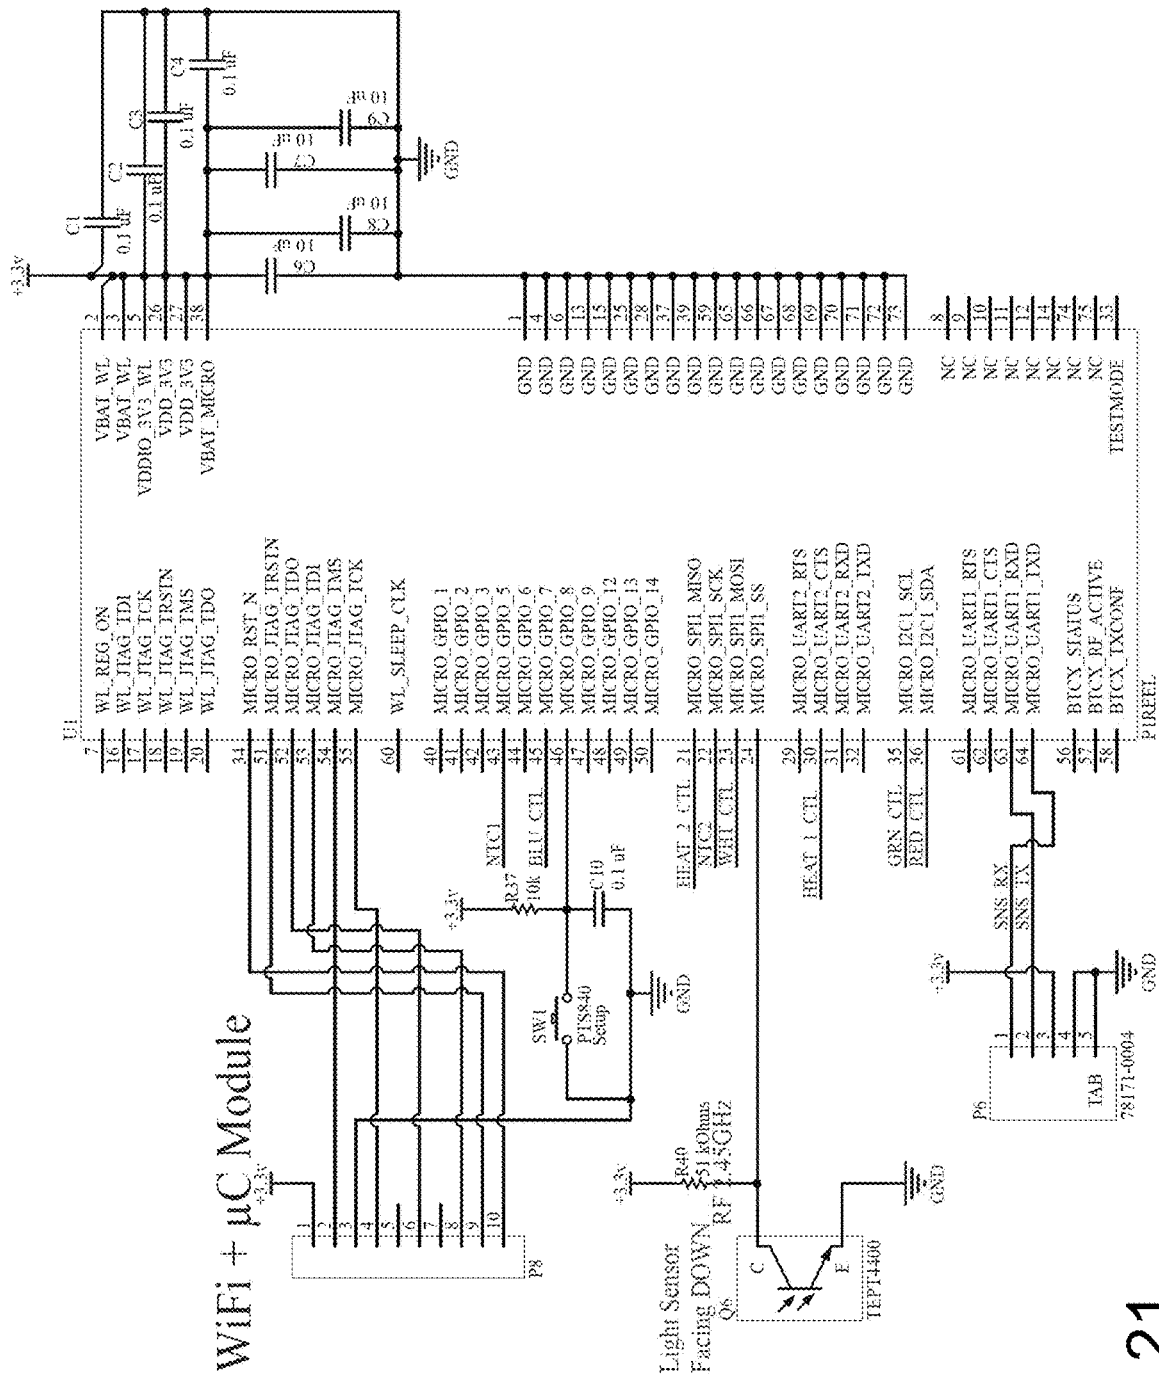


Figure 21



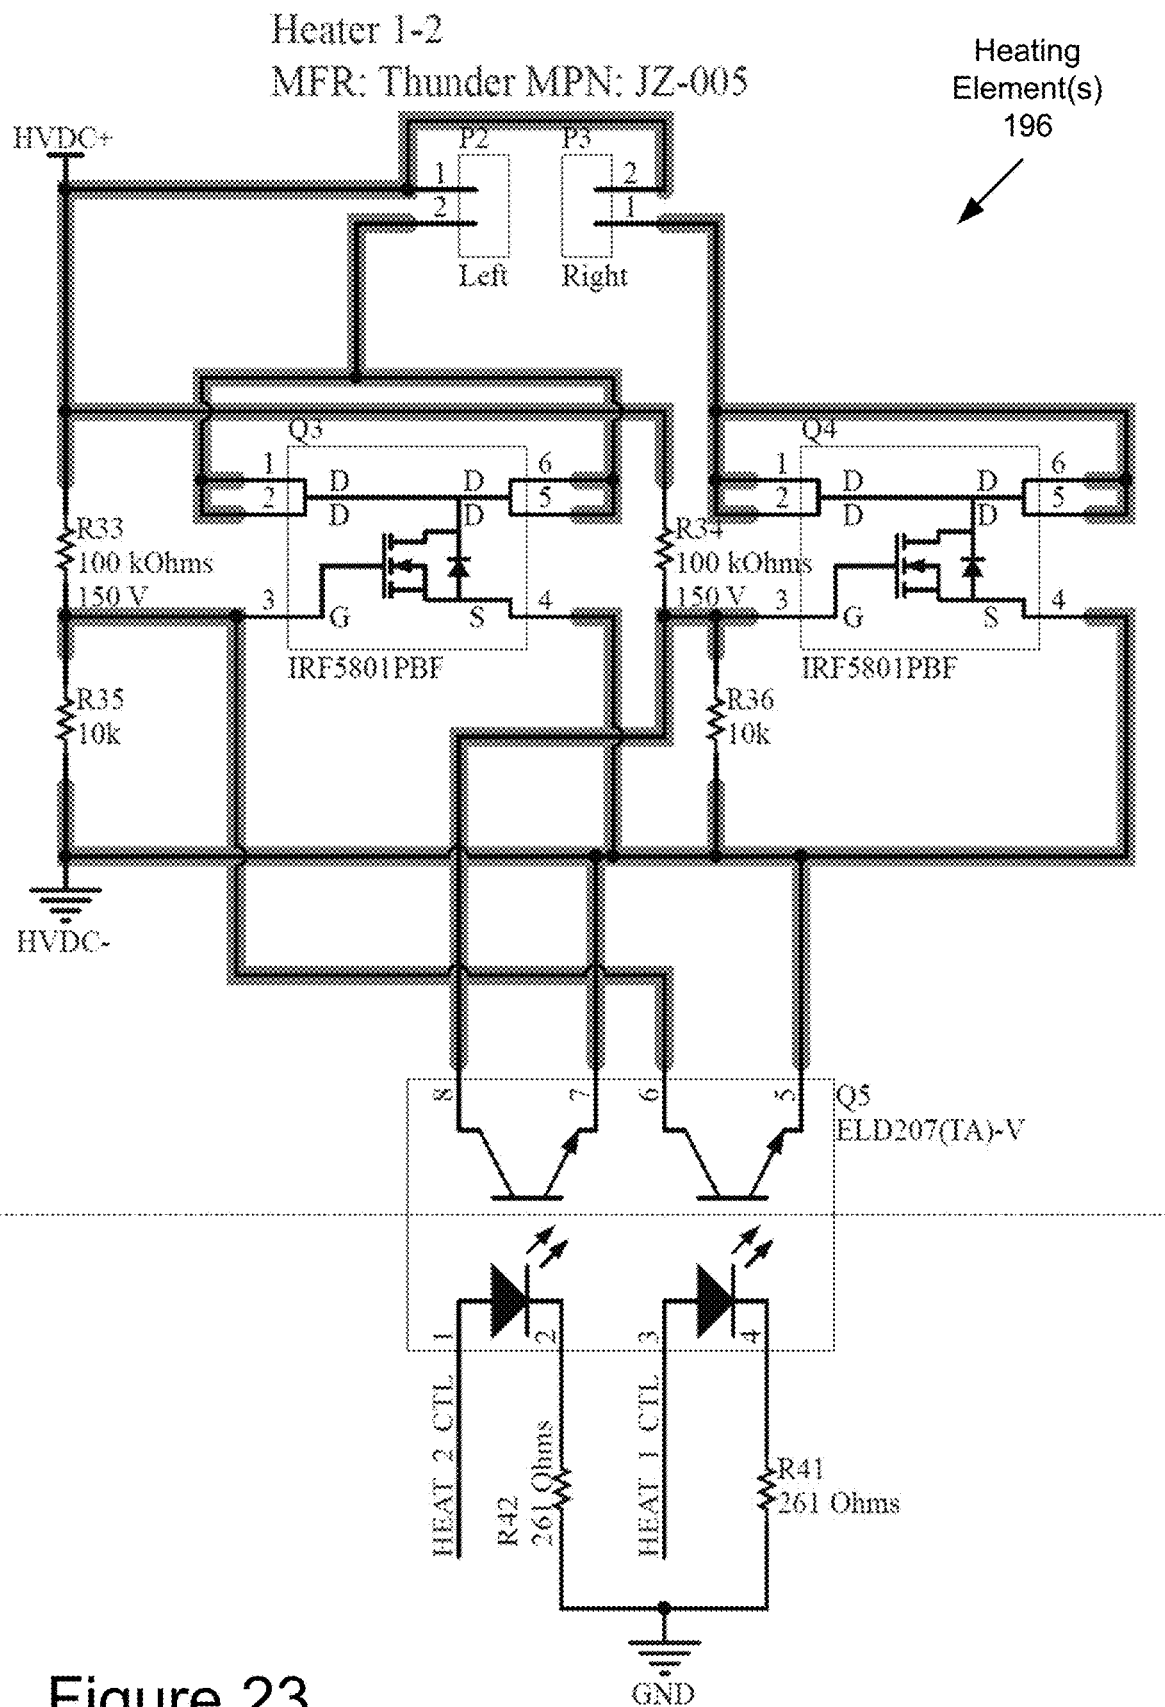


Figure 23

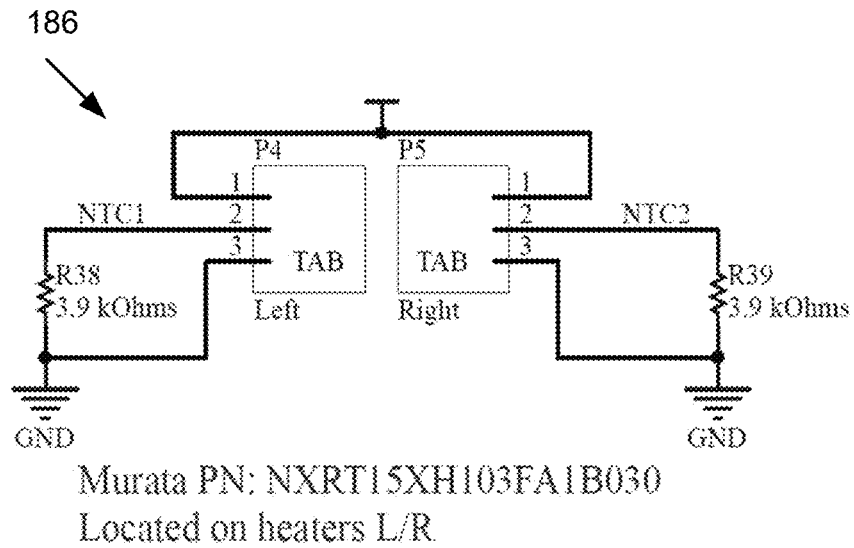


Figure 24

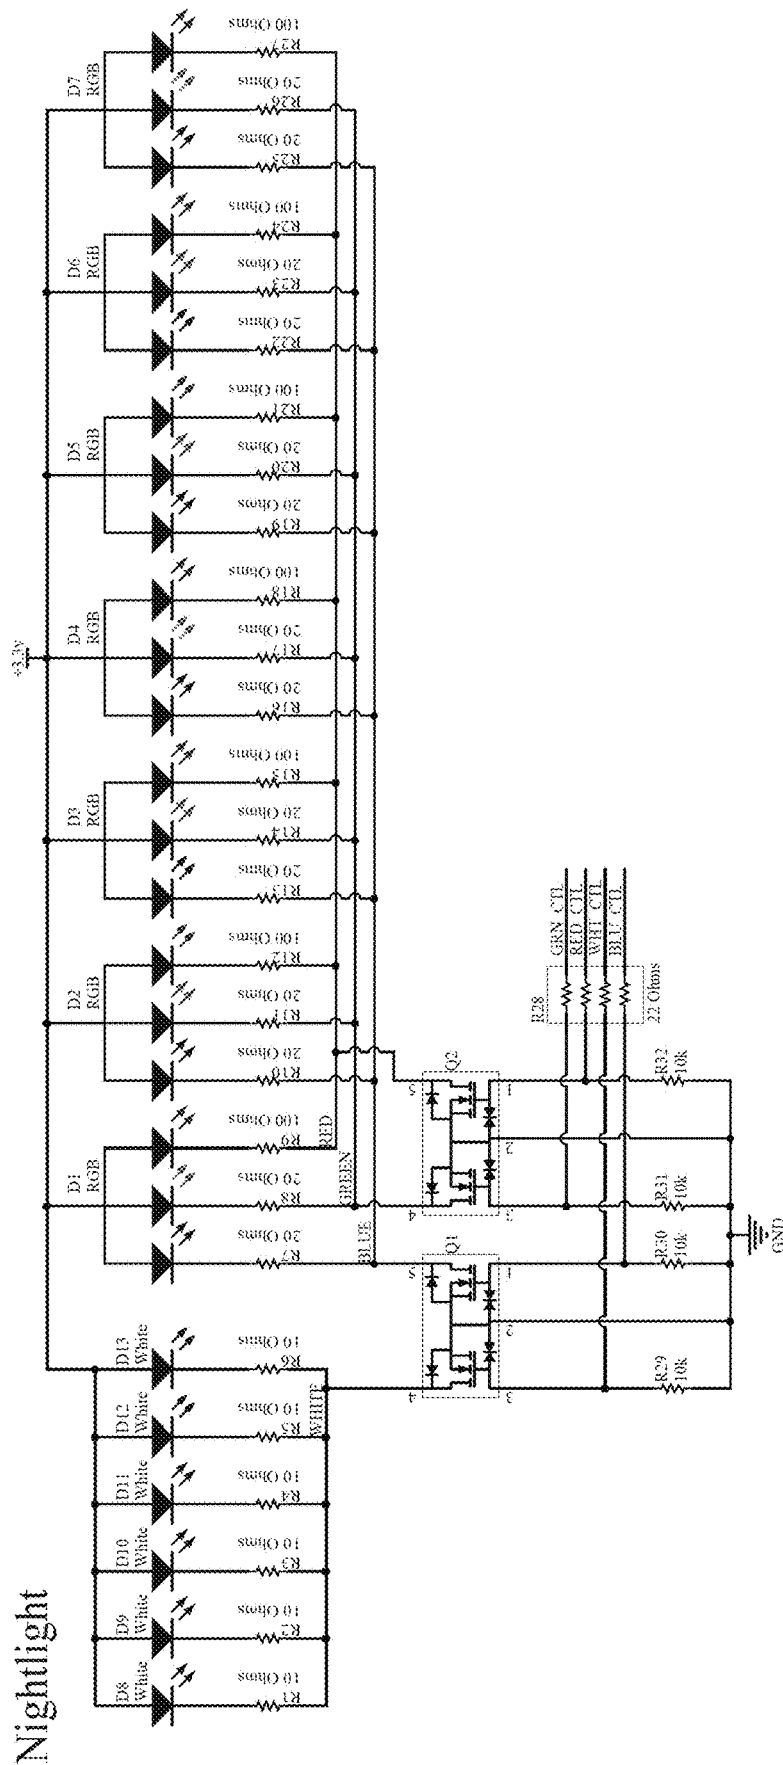


Figure 25

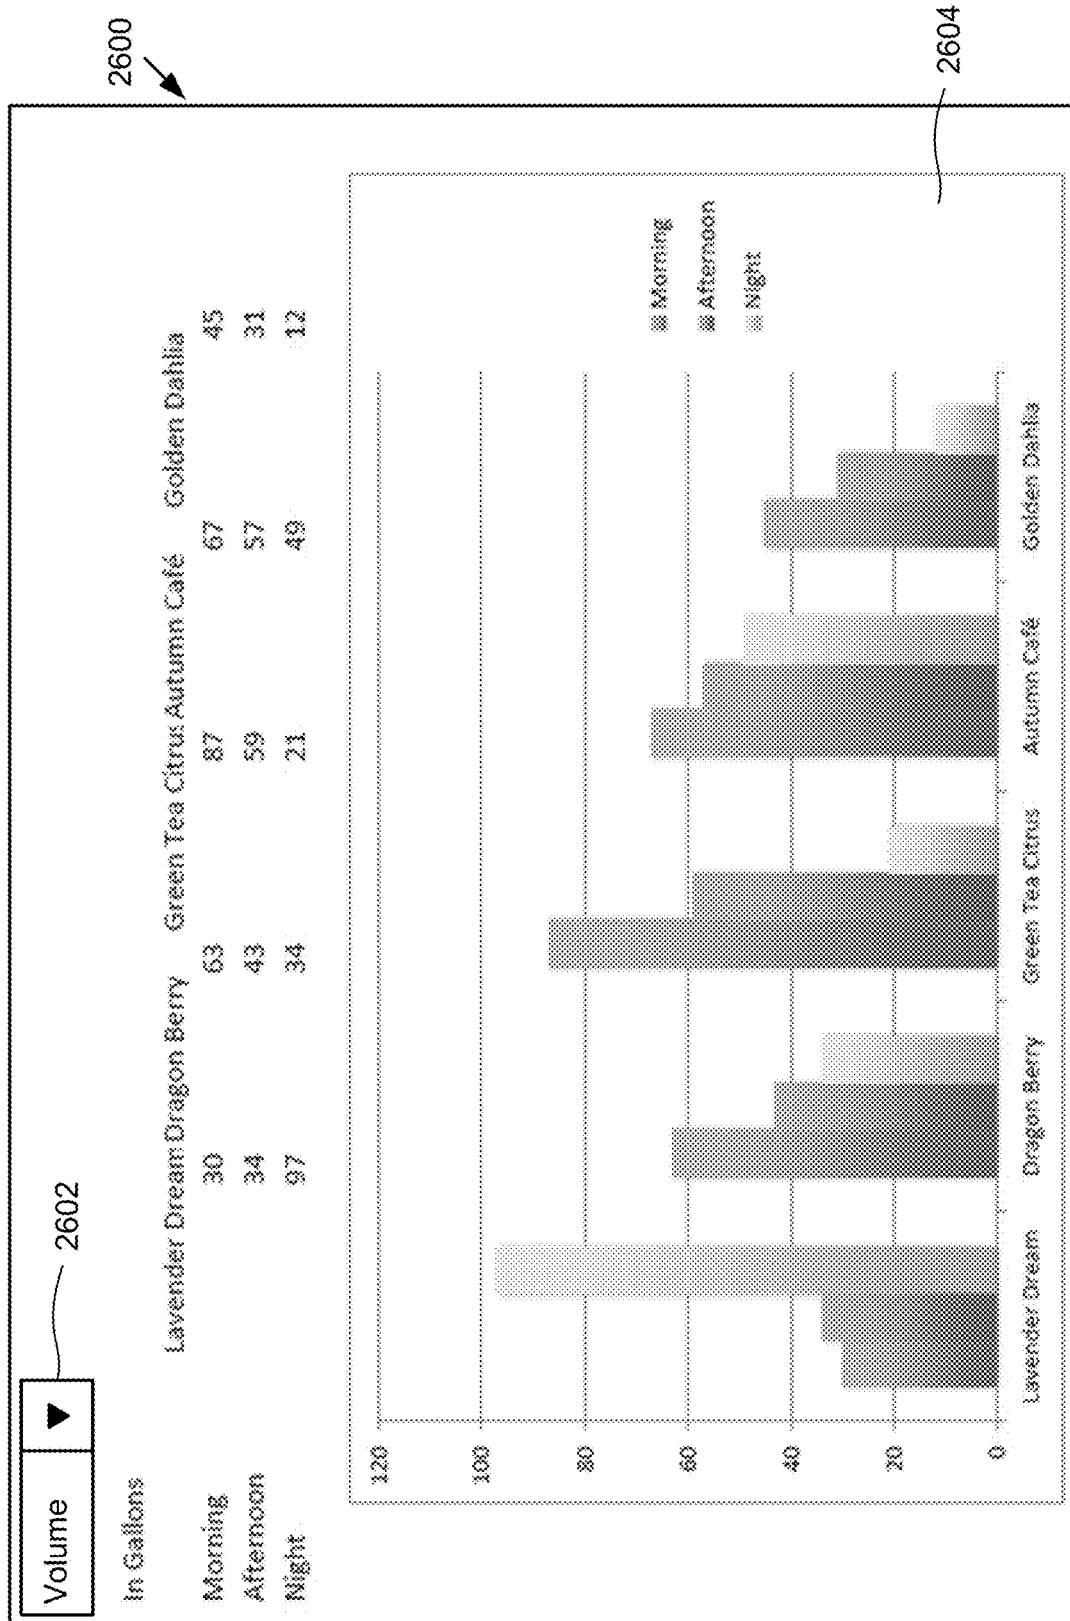


Figure 26

U.S. Patent

Jan. 4, 2022

Sheet 51 of 52

US 11,213,601 B2

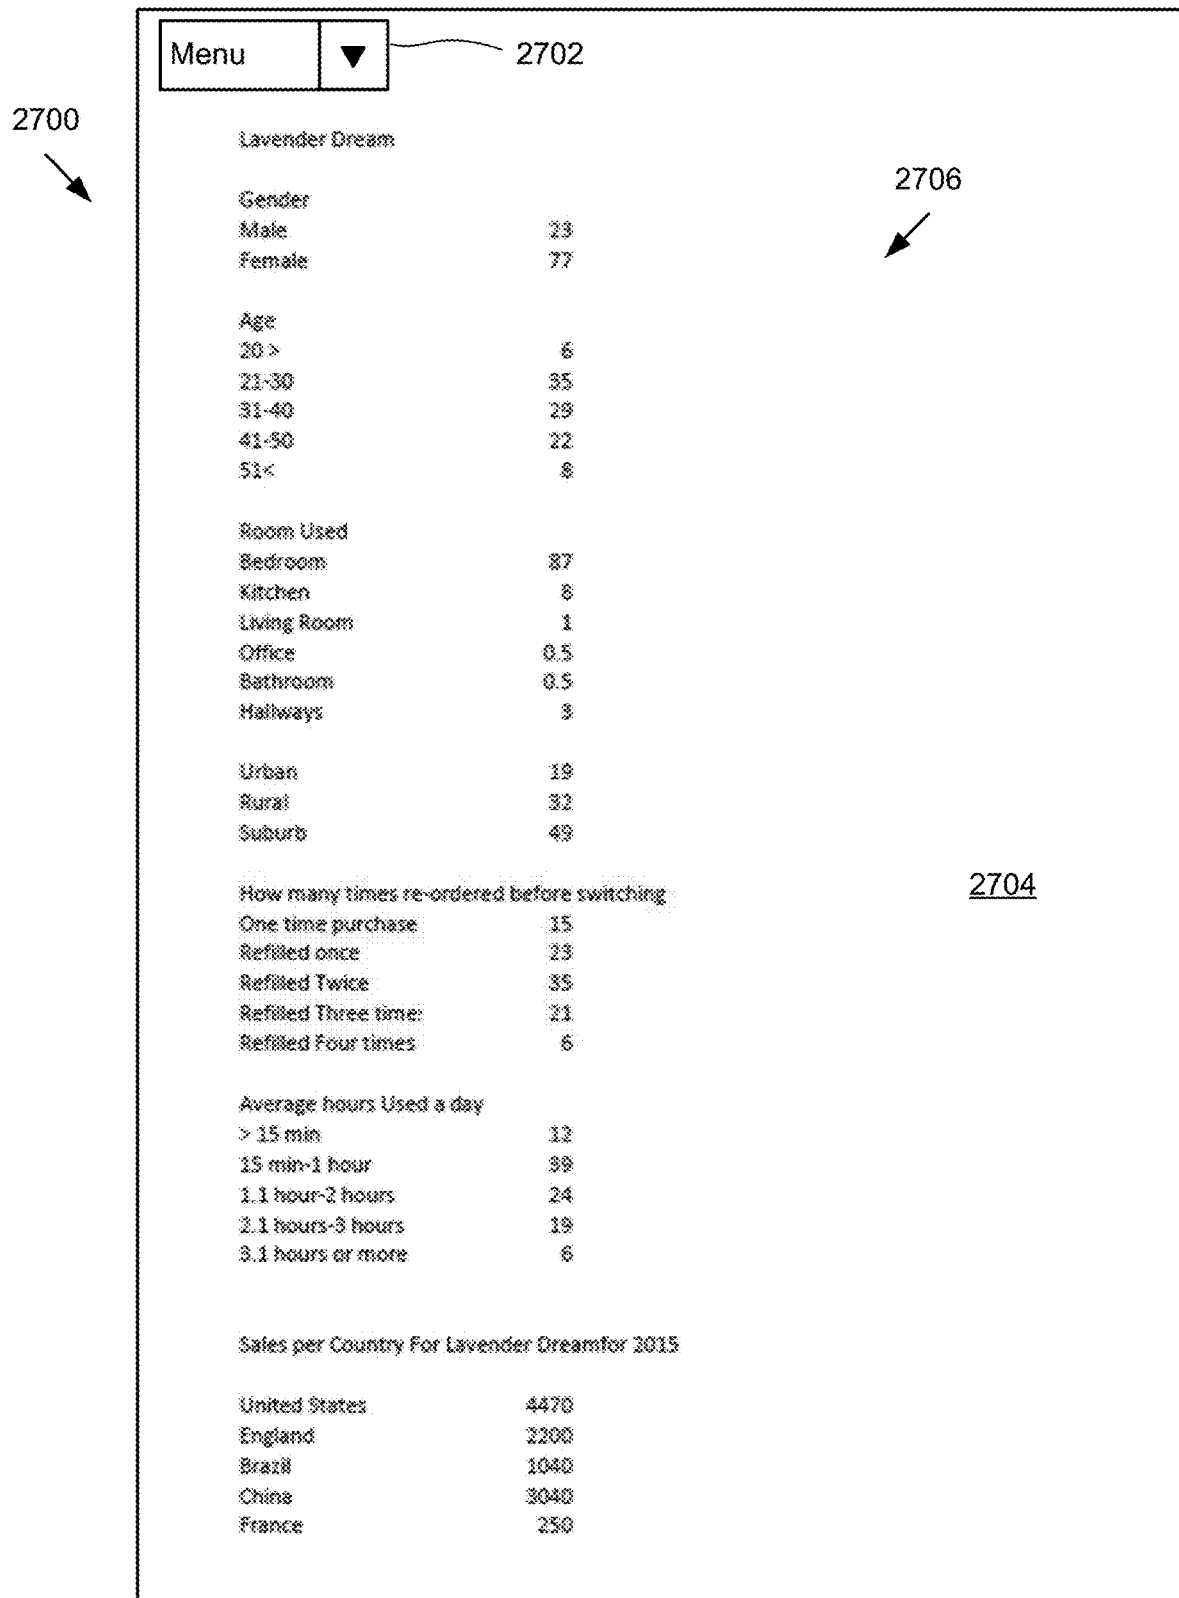


Figure 27A

U.S. Patent

Jan. 4, 2022

Sheet 52 of 52

US 11,213,601 B2

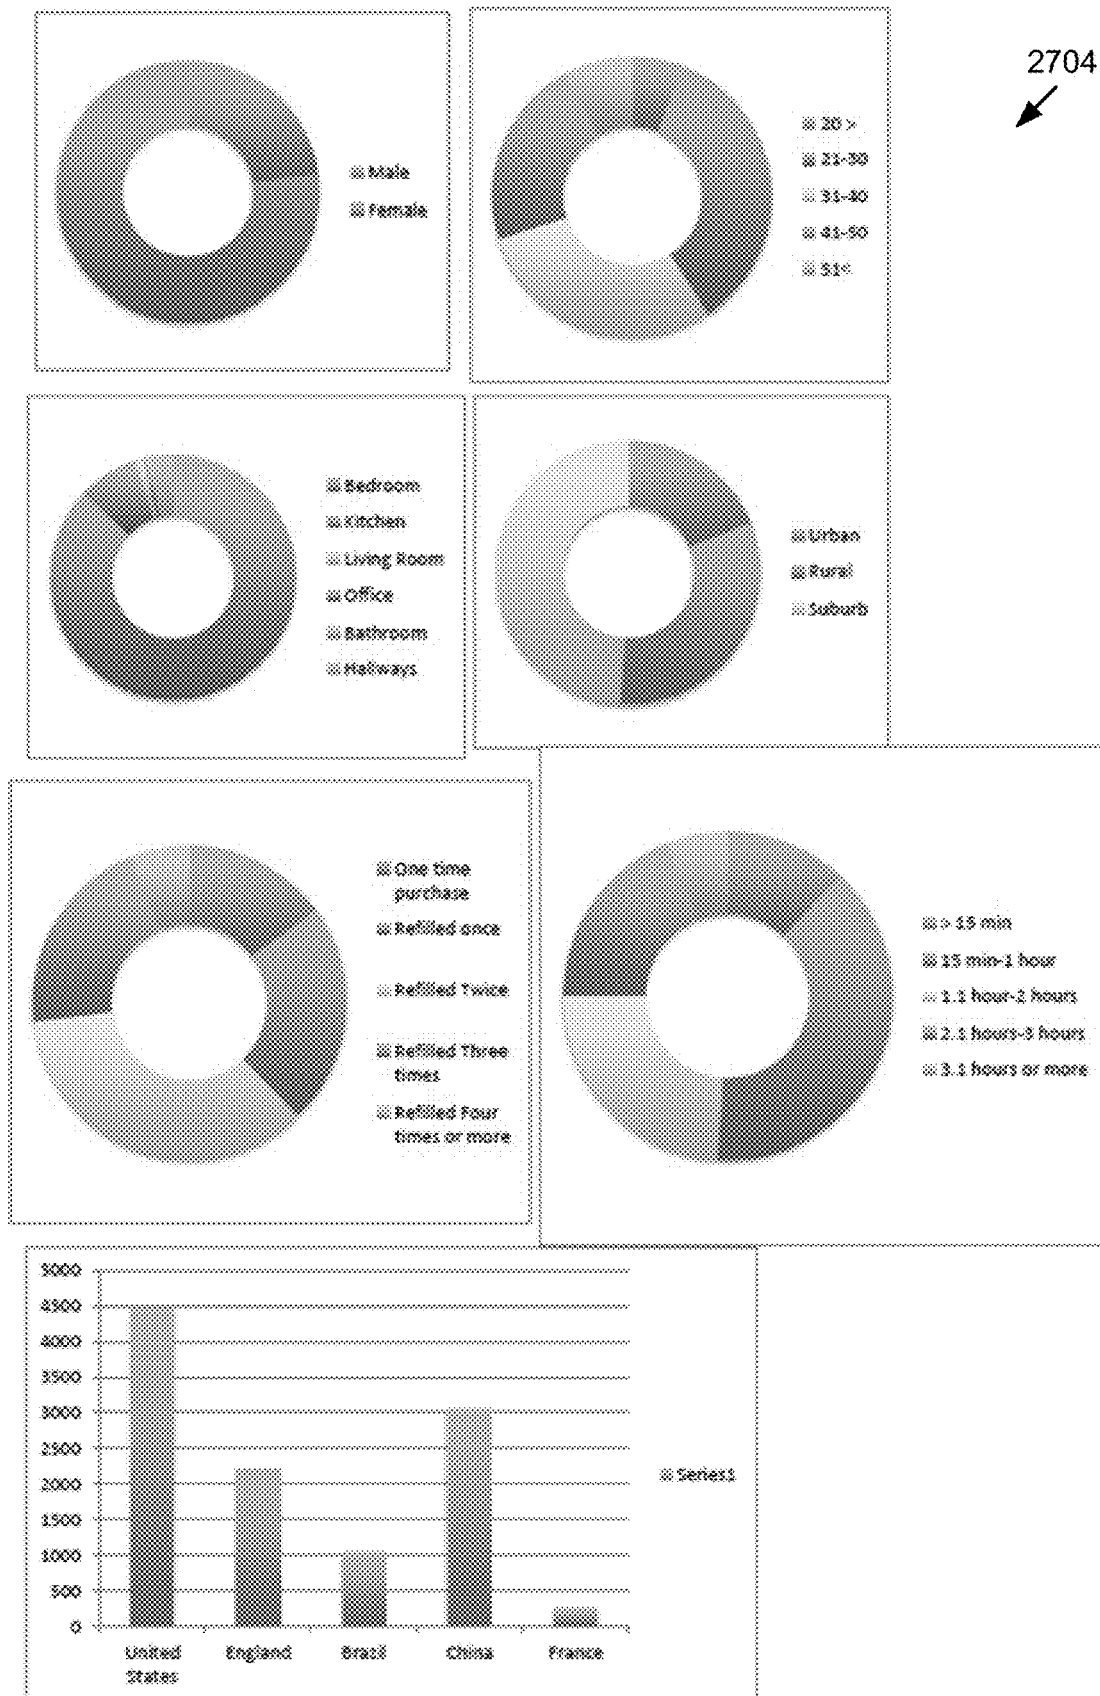


Figure 27B

US 11,213,601 B2

1

**FRAGRANCE INTENSITY CONTROL
MECHANISM WITH PID CONTROL****BACKGROUND**

The present disclosure relates to scent dispensation.

Existing solutions for dispensing scents within a location, such as a home, include conventional scented candles, incense stocks, hanging air fresheners, and electric fragrance diffusers, such as those that plug into an outlet socket and include a heating element to heat a fragrant substance. In some cases, a porous substrate is saturated with the fragrant substance and then placed adjacent to a heat source, which heats up the fragrant substance to diffuse it within a pre-determined space.

While functional, these solutions are limited. For example, it is often difficult to tell when a fragrance dispenser has run out of fragrance, as the dispenser typically lacks any sort of indicator and one is left to smell the dispenser manually to determine how much fragrance is actually left, which is ineffective as the dispenser itself may still smell like the diffuse fragrance up close that may have little effect in the area that is to be perfumed. In addition, if the users wishes to change a fragrance, the user has to manually open the dispenser to replace the cartridge in the dispenser, or in the case of hanging dispensers, replace it with a fresh version.

Existing scent dispensers also provide little control to users to configure how much scent is actually being diffused. Some existing electronic scent dispensers include a hardware selector to switch the device between off, low, and high operating states. However, these electronic scent dispensers are not self-aware, and therefore output the same amount of scent over time. Therefore, even at a low setting, the scent dispenser can eventually over-perfume a room, and only change state when manually switched off or set to another level by the user using the switch. This results in the unpleasant experience of the room becoming too perfumed and, in some cases, causes people to leave the room.

SUMMARY

According to one innovative aspect of the subject matter being described in this disclosure, an example system includes a first vial including a first side, one or more sidewalls, and a second side. The one or more sidewalls connect the first side to the second side. The first side, the one or more sidewalls, and the second side collectively form an inner cavity. The first side includes an opening through which a solution containable in the inner cavity is dispensed from the first vial. The system includes a vial sensor including a first array of sensor pads electrically coupled to a controller, a sidewall from the one or more sidewalls of the first vial being situated adjacent to the first array of sensor pads within a first array of electric fields. The first array of sensor pads are electrically charged to produce the first array of electric fields. The controller detects changes in one or more of the electric fields of the first array as the solution is dispensed from the first vial.

In general, the system may optionally include one or more of the following features: a second vial including a first side, one or more sidewalls, a second side; that the one or more sidewalls of the second vial connect the first side of the second vial to the second side of the second vial; that the first side of the second vial, the one or more sidewalls of the second vial, and the second side of the second vial collectively form an inner cavity of the second vial; that the first

2

side of the second vial includes an opening through which a second solution containable in the inner cavity is dispensed from the second vial; that the first array of sensor pads are situated along a first side of the vial sensor; that the vial sensor includes a second array of sensor pads electrically coupled to the controller and situated along a second side of the vial sensor situated located adjacent to the first side of the vial sensor; that a sidewall from the one or more sidewalls of the second vial is situated adjacent to the second array of sensor pads with a second array of electric fields; that the second array of sensor pads is electrically charged to produce the second array of electric fields; that the controller detects changes in the one or more of the electric fields of the second array as the second solution is dispensed from the second vial; a vial retaining mechanism including a first vial coupling and a second vial coupling; that the first vial coupling receives and detachably retains the first side of the first vial, and the second vial coupling receives and detachably retains the first side of the second vial; that the first side of the first vial includes a neck through which the opening of the first side of the first vial extends; that the first side of the second vial includes a neck through which the opening of the first side of the second vial extends; that the first vial coupling includes one or more surfaces shaped to engage with and secure the neck of the first side of the first vial; that the second vial coupling includes one or more surfaces shaped to engage with and secure the neck of the first side of the second vial; that the vial retaining mechanism includes a first wick receiver and a second wick receiver; that the first wick receiver includes a stopping member having a wick hole extending through the stopping member of the first wick receiver; that the second wick receiver includes a stopping member having a wick hole extending through the stopping member of the second wick receiver; that the wick hole of the first wick receiver receives a wick extending outwardly from the opening of the first side of the first vial; that the wick hole of the second wick receiver receives a wick extending outwardly from the opening of the first side of the second vial; a first heating element situated on a side of the stopping member opposing the first vial; a second heating element situated on the side of the stopping member opposing the second vial; that the first heating element heats an end of the wick extending through the wick hole of the first wick receiver, and the second heating element heats an end of the wick extending through the wick hole of the second wick receiver; that the first heating element includes a ring that receives the end of the wick extending through the wick hole of the first wick receiver; that the second heating element includes a ring that receives the end of the wick extending through the wick hole of the second wick receiver; that the first heating element and the second heating element are formed at least in part of a ceramic material; a first vial coupling that receives and detachably retains the first vial; a heating element that heats the solution receivable from the first vial; a housing that houses the first vial coupling, the heating element, and the vial sensor; that a front side of the housing includes an opening providing access to the first vial; a removable cover that, when attached to the front side of the housing, covers the opening providing access to the first vial; that the removable cover includes one or more first magnetic fasteners; and that the front side of the housing includes one or more second magnetic fasteners that are compatible with the one or more first magnetic fasteners and that magnetically engage with the one or more first magnetic fasteners when the removable cover is situated abuttingly with the front side of the housing.

US 11,213,601 B2

3

In general, according to a further innovative aspect, an example system includes a vial retaining system, a heating element, a vial sensor, and a controller. The vial retaining mechanism includes a vial coupling that removeably retains a vial containing a scented solution. The vial includes a neck forming an opening, a hollow body forming a cavity containing the scented solution, and a wick extending from the cavity through the opening of the neck. The heating element is shaped to receive and heat the wick of the vial. The vial sensor includes an array of sensor pads that are arranged in alignment with the vial retained by the vial coupling. The controller is electrically coupled to the heating element and electrically coupled to the array of sensor pads. The controller regulates a temperature level of the heating element. The controller receives signals from the array of sensor pads and processing the signals to determine a fluid level of the vial.

In general, the system may optionally include one or more of the following features: that the wick passes the scented solution to the heating element; that the heating element diffuses the scented solution by heating the scented solution to the temperature level regulated by the controller; that the controller electrically charges the sensor pads of the array; and that the controller detects a change in the signals received from the array of sensor pads charged by the controller and determines a corresponding change in the fluid level of the scented solution of the vial; the change in the signals is a change in capacitance of at least one of the sensor pads; that the signals from a first subset of the sensor pads reflect a maximum capacitance level; that the signals from a second subset of the sensor pads of the array reflect a minimum capacitance level; and that the controller determines the fluid level of the vial based on the signals from the first subset and the signals from the second subset; that the sensor pads comprise copper pads; that the vial coupling includes one or more fasteners formed to detachably engage with the neck of the vial; that the one or more fasteners include one or more clips;

In general, according to a further innovative aspect, an example system includes a vial retaining system, two or more heating elements, a vial sensor, and a controller. The vial retaining mechanism includes two or more vial couplings that removeably retain two or more vials. The two or more vials each include a neck forming an opening, a hollow body forming a cavity, and a wick extending from the cavity through the opening of the neck. Each of the two or more heating elements are shaped to receive and heat the wick of a corresponding vial of the two or more vials. The vial sensor includes two or more arrays of sensor pads that are respectively arranged in alignment with the two or more vials retained by the two or more vial couplings. The controller is electrically coupled to the two or more heating elements and electrically coupled to each of the two or more arrays of sensor pads. The controller regulates a temperature level of each of the two or more heating elements, and the controller receives signals from the arrays of sensor pads and processes the signals to determine a fill level of each of the two or more vials.

Further innovative aspects include corresponding systems, methods, apparatus, and computer program products. These systems, methods, apparatus, computer program products, and other aspects, are particularly advantageous in a number of respects. For example, the technology enables users to remotely control scent dispensers, switch between scents remotely, and receive notifications when a scent solution is running/has run out, automatically switches the scent solution(s) to diffuse based on user location, allows

4

users to schedule scent diffusion for different locations, etc. In addition, the technology can collect data about scent solution usage and user habits when using scent dispensers, and then analyze that data to produce analytics to inform producers about characteristics of the users, the scents being consumed, etc. Numerous additional features are also possible and contemplated, many of which are discussed herein.

However, this list of features and advantages is not all-inclusive and many additional features and advantages are within the scope of the present disclosure. Moreover, it should be noted that the language used in the present disclosure has been principally selected for readability and instructional purposes, and not to limit the scope of the subject matter disclosed herein.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a block diagram illustrating an example system for scent dispensation.

FIG. 1B is a block diagram illustrating an example scent dispenser.

FIG. 2A is a front perspective view of an example scent dispenser.

FIG. 2B is a rear perspective view of the example scent dispenser.

FIG. 2C is a front view of the example scent dispenser with a cover removed.

FIG. 2D is a front exploded view of the example scent dispenser.

FIGS. 2E-2G are various further views of various components of the example scent dispenser.

FIG. 3A is a schematic diagram of an example vial sensor.

FIG. 3B is a block diagram of an example vial sensor.

FIGS. 4A-4D are block diagrams depicting a progression for sensing a solution level of a vial using the vial sensor.

FIG. 5A is a front perspective view of an example vial with a wick inserted.

FIG. 5B is a front perspective view of the example vial with the wick removed.

FIG. 6 is a flowchart of an example method for sensing vial volume.

FIG. 7A is flowchart of an example method for activating a vial.

FIG. 7B is flowchart of a further example method for activating a vial.

FIG. 8 is a flowchart of an example method for automatically adjusting the dispensation intensity of a scent dispenser based on the presence of nearby scent dispensers.

FIG. 9 is a flowchart of an example method for adjusting the dispensation intensity of a scent dispenser based on room size.

FIG. 10 is a flowchart of an example method for controlling operation of scent dispenser(s) based on geolocation data.

FIG. 11 is a flowchart of an example method for scheduling scent dispensation for room(s) of a premises.

FIG. 12A is a flowchart of an example method for activating a scent dispenser based on detected motion.

FIG. 12B is a flowchart of an example method for using motion detection to control operation of a scent dispenser.

FIG. 13 is a front perspective view of an example vial with a scannable optical representation.

FIGS. 14A-14H are graphical representations of user interfaces for setting up a scent dispenser.

FIGS. 15A-15H are graphical representations of user interfaces for configuring vial settings of a scent dispenser.

US 11,213,601 B2

5

FIGS. 16A-16E are graphical representations of user interfaces for scheduling scent dispensation for one or more rooms.

FIG. 17 is a graphical representation of a user interface for viewing vial properties of an installed vial.

FIGS. 18A-18M are graphical representations of user interfaces of electronic marketplace for (re)ordering vials.

FIGS. 19A-19F are graphical representations of user interfaces for viewing and configuring room, schedule, and dispenser settings.

FIG. 20A is a graphical representation of a user interface for installing a new or replacement vial.

FIG. 20B is a graphical representation of a user interface for disabling geolocation-based control of scent dispensation.

FIGS. 21-25 are schematic diagrams of various example components of a scent dispenser.

FIGS. 26-27B are graphical representations of example user interfaces for display and receiving user interaction with scent analytics.

DETAILED DESCRIPTION

The technology described in this disclosure relates to dispensing scent within the premises using remotely controllable scent dispensers. As an example, the technology allows the user to remotely control the operation of scent dispensers installed in his or her home using a mobile application executed on a mobile device. Using the mobile application, the user may turn a scent dispenser on or off, change the scent that is being dispensed by the dispenser, change the intensity level of the scent dispensation, set a schedule for the scent dispensation, control the operation of the scent device based on the location of his/her mobile device, receive status notifications from about the operation of the scent dispenser, such as when a particular scent solution may be running out, etc.

FIG. 1A is a block diagram illustrating an example system 100 for scent dispensation. The system 100 may include one or more scent dispenser installations 158. In a typical implementation, a multiplicity of users 112 may install scent dispenser on their respective premises 140 in which they wish to dispense various scents. A scent dispenser installation 158 may include any number of scent dispensers 132a . . . 132n. In the depicted implementation, scent dispensers 132a and 132n (individually or collectively also referred to as simply 132) are plugged into electrical sockets 146a and 146n. The scent dispensers 132 may be located in the same room or in different rooms (e.g., 142a and 142n).

As shown, the illustrated system 100 further includes client device(s) 106 and a server 150, which are electronically communicatively coupled via a network 102 for interaction with one another, access point(s) 120, and the scent dispenser(s) 132, etc., using standard networking protocols, as reflected by signal lines 104, 138, and 152. In a typical installation, the scent dispenser(s) 132 are coupled for electronic communication with the access point(s) 120 (e.g., a modem, router, etc., coupled to the network 102) as reflected by signal lines 134a and 134n. In further embodiments, the scent dispenser(s) 132 may be coupled directly to the network 102 as reflected by the signal line 138, such as via a wireless wide area network (e.g., WWAN) or other suitable network. For clarity, reference to the term network 102 includes the local networks of the installations (e.g., provided by access point(s) 120, etc.), unless otherwise specified.

6

The scent dispenser 132 includes a communication-enabled diffusion device that diffuses scent solution(s) from scent vial(s) installed in the scent dispenser 132. The scent dispenser 132 may include wireless transceivers configured to communicate with other devices within range, such as other scent dispenser(s) 132 and/or access point(s) 120. In some embodiments, the diffusion device nebulizes the scent solution into the air of the surrounding environment to diffuse the scent. The structure, acts, and/or functionality of the scent dispenser 132 is discussed further below.

The access point 120 connects to the set of scent dispensers 132 installed on the premises 140, as shown by the signal lines 134a . . . 134n, and exchanges data sent between the scent dispensers 132 and the mobile device(s) 106 and/or the dispenser management server 150 (e.g., via the signal line 138).

The dispenser management application 160 operable by the dispenser management server 150 can receive operational data from the scent dispensers 132 in association with the premises 140, room 142, user(s) 112, and/or scent vials (e.g., see FIG. 2C) with which they are associated. The dispenser management application can receive management requests and geolocation data from mobile devices of the user(s) 112 in association with the scent dispenser(s) 132 that are registered to the user(s) in the system 100. The management requests may include registration data requesting to register a scent dispenser 132 with a user's 112 account, a particular premises, and/or a room within the premises; scheduling data requesting to schedule dispensation of scent(s), from scent dispenser 132 or a set of two or more scent dispenser(s) 132, for particular timeframe(s) within a particular room of a premises; operational data instructing to activate or deactivate a scent dispenser 132 and/or specifying which scent solution to activate and/or deactivate; geolocation data indicating a current location of a user, etc. The scheduling data may include a reoccurring schedule that repeats on certain days and/or times of day, and may specify which scent solution(s) should be dispensed at which times.

In some embodiments, the dispenser management application 160 may maintain the device states, scent allocations, users, and schedules of the scent dispensers 132. The dispenser management application 160 may make device function calls to command/control the scent dispensers 132 (e.g., by sending state settings), and may receive and log published events (heartbeat, alerts, data, etc.) received from the scent dispensers 132 in the data store 170. Example events may include, but are not limited to:

Description	Event Name (string)	Event Data (string)
Device online	"spark/status"	online
Device flash started	"spark/flash/status"	started
Device flash successful	"spark/flash/status"	success
Heartbeat every ## minutes	"msg"	See below table.
Bay 1 Empty	"msg"	bay1_empty
Bay 2 Empty	"msg"	bay2_empty

Further, an example heartbeat event be associated with a timestamp and may include a delimited string reflecting various operation aspects of a scent dispenser 132. One such non-limiting example string may be "1,2,99999999,200,200,100,100,100,255:255:255,100,100,200,200", where the delimited values may have the following meaning:

US 11,213,601 B2

7

Description	Short Description	Type (int, double, string)	Range/unit	Example max char
Package Version #	version	integer	1-9	1,
Heating element state	heaterState	integer	0-2 (0 = none enabled, 1 = heater 1 enabled, 2 = heater 2 enabled)	2,
Heating element duration (time heater has been active) (ms)	heaterDuration	integer	1-99999999 (ms)	99999999,
Slot/Bay 1 temperature	bayTemp1	double	-50-200	200,
Slot/Bay 2 temperature	bayTemp2	double	-50-200	200,
Slot/Bay 1 volume	bayVol1	integer	0-100	100,
Slot/Bay 2 volume	bayVol2	integer	0-100	100,
Ambient light	ambientLight	integer	0-100	100,
Mood light state (rgb)	mLState	string	255:255:255	255:255:255,
Slot/Bay 1 fragrance identifier	bayFID1	integer	0-999	999,
Slot/Bay 2 fragrance identifier	bayFID2	integer	0-999	999,
Slot/Bay 1 fragrance target temperature	bayTempTar1	integer	0-100	200
Slot/Bay 2 fragrance target temperature	bayTempTar2	integer	0-100	200,

In the above table, temperature is in Celsius, length is in millimeters (mm), duration is in milliseconds (ms), and time zone is any particular time zone (e.g., Mountain Time Zone (UTC-07:00)). Further, a fragrance identifier is a unique ID that corresponds to a specific type of scent solution, and a fragrance temperature is a temperature or range that a specific scent solution is heated to. Additionally, the scent dispenser **132** may be placed in various different operation states, such as but not limited to listening mode—for onboarding new credentials, safe mode—for development, DFU mode—for development, and connected—for normal operation.

In some embodiments, the scent dispenser **132** may support various functions, calls for which may originate from other devices of the system **100**, such as the dispenser management application **160**. Two non-limiting example functions may include command and tune:

int command(String operation); and

int tune(String operation),

where the tune function may use the format “TunableParameter,[value]” for the operation parameter. In this example, [value] is a positive integer. The scent dispenser **132** may respond with a ReturnCode if the request was received, such as:

```
enum ReturnCode {
    PURA_FAILURE = 0,
    PURA_SUCCESS = 1
};
```

8

Non-limiting example acts that may be performed using the above functions may include:

Description	Function	String operation
Enables bay 1 heater	command	enableHeaterBay1
Enables bay 2 heater	command	enableHeaterBay2
Disables bay 1 heater	command	disableHeaterBay1
Disables bay 2 heater	command	disableHeaterBay2
Sets mood light RGB	tune	mLRGB, [value]:[value]:[value]
Sets mood light activation threshold	tune	mLThreshold, [value]
Sets bay fragrance identifier and temperature (*C.)	Tune	baySet, [value1], [value2], [value3] Value 1: bay # (1 or 2) Value 2: fragrance identifier Value 3: fragrance target temperature

Users may register with the scent service embodied by the dispenser management application **160**, which enables them to remotely configure and interact with their respective scent dispensation installations **158**, and to receive notifications automatically as state changes are detected by their scent dispensation installations **158**.

The dispenser management server **150** includes a data store **170** storing various types of data used by the dispenser management application **160**. Example data types include dispenser data **172**, user data **174**, fragrance data **176**, usage data **178**, premises data **180**, and analytics data **182**. The dispenser data **172** may include entries for the scent dispensers **132** in the system **100**. A given entry may include a unique identifier for the corresponding scent dispenser, a firmware version, an operational status indicator (e.g., on, off, etc.), a schedule including which day(s) of the week and/or times of day the scent dispenser should be operating, which scent solution(s) should be dispensed during the scheduled timeframe(s), whether/which color light should be illuminated, the user identifier(s) with which the scent dispenser is registered, etc.

The user data **174** may include entries for the users **112** of the system **100**. A given entry may include a unique identifier for the user, contact information for the user (e.g., address, phone number, electronic address (e.g., email)), payment information, scent subscription information specifying which reoccurring scent vials should be shipped to the user, historical scent vial purchase information, etc.

The fragrance data **176** may include entries for the different scent solutions that are supported by the system **100**. An example entry may include a unique identifier for a given scent, a scent name, a scent description, a list of ingredients that comprise the scent’s composition, an indication of the strength of a scent, room types for which to suggest the scent, etc.

The usage data **178** may include logged usage statistics received from the scent dispensers **132** deployed in the system **100**. Example usage statistics may include hours of operation, which scent solutions were dispensed during those hours of operation, thus reflecting the time of day scent solutions were utilized, the amount of scent solutions that were dispensed as measured by vial sensors included in the scent dispensers **132**, the rate at which the scent solutions were dispensed, etc. The usage statistics for a given scent dispenser **132** may be specifically associated with the user associated with the usage and/or a room of a premises in which the scent dispenser **132** is installed.

US 11,213,601 B2

9

Further, the fragrance data **176** may include vial data including unique identifiers for each scent vial produced and registered for use in the system **100**. The vial data may reflect the installation status of a vial, the unique identifier of the scent solution contained by the vial, and the fill level of the vial, an eligibility status, etc. For instance, the vial data for a particular vial may indicate whether the vial is new and has not yet been installed, that the vial is currently installed but has not yet been depleted of its solution, and that the vial was depleted of its solution and is no longer eligible for use.

The premises data **180** may include entries for different premises **140** in which scents dispensers **132** are installed. The premises data **180** may include different rooms **142** for the premises **140**, and may indicate in which specific rooms **140** the scent dispensers **132** are installed. Example premises data may include unique identifiers for each of the premises, room names for each of the rooms of a given premises (e.g., which may be customized by the user), the dimensions of the rooms of the premises, an indication of which scent dispensers **132** are installed in which rooms of a given premises, for example, using the unique identifiers of the scent dispensers **132**, etc., an indication of which unique user identifiers are associated with which unique premises identifiers, etc.

The analytics data **182** may include data produced by the dispenser management application **160** the data stored in the data store **170**. For instance, data from the scent dispensers belonging to users **112** may be aggregated by the server in the data store **170** and then analyzed to generate analytics. These analytics can be used by the manufacturer to improve the product, the user to evaluate his/her usage, and the scent solution producers to learn more about their users, the users' habits and preferences, their products, etc.

Example analytics data may reflect scent preferences, such as which scents consumers use most often (e.g., based on the usage data **178** determined by a vial sensor), scent preferences by room type of the premises (e.g. floral for bathrooms, edible scents for kitchens, etc.) (e.g., based on the correlation between the fragrance data **176** and the premises data **180**), which scents consumers are repurchasing the most (based on user data **174**), whether or not consumers are mixing scents in specific rooms (e.g., based on the correlation between the fragrance data **176**, the usage data **178**, and the premises data **180**), scent preferences by season (based on time/date coded usage data **178**), preferences for strength of a scent (light vs. strong fragrance) and does that differ by room (e.g., based on the correlation between the fragrance data **176**, the usage data **178**, and the premises data **180**), whether consumer scent preferences evolve over time (e.g., based on the usage data **178**), preference for classic vs. novelty scents (e.g., based on the usage data **178** and the fragrance data **176** that tags each scent as classic or novelty), etc.

Example analytics data may reflect scent dispensation behaviors, such as how often users use their scent dispensers **132** (e.g., based on the usage data **178**), is the use continuous or as needed (e.g., based on the usage data **178**), how long is the continuous use (e.g., several hours, e.g., several days, etc., based on the usage data **178**), how long does it take for consumers to change out a cartridge/refill (e.g., usage data reflects an empty vial stayed in the scent diffuser **132** for a certain timeframe, which can be averaged over many, or all users (e.g., generally, for that fragrance type, etc.)), how often are consumers purchasing refills (e.g., based on the user data **174** reflecting purchase history), preferred rooms for using scent dispenser **132** (e.g., based on the correlation

10

between the usage data **178** and the premises data **180**), use of scent dispensers **132** when users **112** are in vs. out of the premises **140** (e.g., based on the correlation between the users' **112** user data **174** and the usage data **178**), etc.

Example demographics data may reflect behaviors and preferences by different demographic groups. User data may reflect a user's gender, age, income, race/ethnicity, number of children in the home, number of pets in the home, region, settlement-type (urban, rural, suburban, etc.), premises type (single family home, apartment, condo, townhouse, small business, large business, hotel, bed and breakfast, warehouse, restaurant, etc.), personal or business, etc. Using the user data, any of the other data or combinations thereof may be segmented to determine which groups may be more or less predisposed to scent dispensation, and how different factors affect the level of scent dispensation by a particular group.

The data stored by the data store **170** may be correlated using various common keys, such as unique identifiers (e.g., user identifiers, room identifiers, fragrance identifiers, scent dispenser identifiers, vial identifiers, room identifiers, premises identifiers, etc.), which allow the dispenser management application **160** to generate and provide rich analytics. Example graphical representations that may be rendered for display on a computing device **106** of a user **112** are depicted in FIGS. **26-27B**. In particular, FIG. **26** illustrates an example graphical user interface **2600** including a digital data visualization **2604** showing usage statistics for different scent solutions (e.g., lavender dream, dragon berry, green tea citrus, autumn café, golden dahlia).

In some embodiments, the statistical data used to generate the digital data visualization **2604** is received from a multiplicity of scent dispensers **132** installed in different premises in the system. The vial sensors of the scent dispensers **132** detect the changes in the fluid levels of the vials as the solutions from the vials are diffused into the air of the respective premises **140**. The controllers of the scent dispensers **132** receive the data reflecting the changing fluid levels and transmit that data to the dispenser management server **150**, which in turn stores the data as usage data **178** in the data store **170** in association with the scent/fragrance ID to which the data corresponds. As a result, the usage data **178** reflects the amount of each scent solution that is consumed over time for each scent dispenser **132** relative to the user ID, the premises ID, the room ID, scent dispenser **132** ID, the vial ID associated with that particular scent solution (e.g. which is identifiable as discussed elsewhere herein).

FIGS. **27A** and **27B** are graphical representations of further graphical user interface **2700** for displaying and providing user interaction with scent analytics. As shown, the graphical user interface **2700** includes usage statistics **2706** for a particular scent solution (e.g., lavender dream), including segmentation by gender, age, room type, settlement-type. The statistics **2706** include information on how many times that particular scent solution was reordered before switching to another scent solution (e.g., refilled in this case means the vial was switched out for a new vial in the users' **112** scent dispensers **132**), as well as the average hours the scent solution was used each day by the users **112** who have the scent solution installed in their scent dispensers **132**. The graphical user interface **2700** includes a corresponding set of digital data visualizations **2704** that correspond to the usage statistics, as shown in FIG. **27B**.

FIG. **1B** is a block diagram illustrating an example scent dispenser, which is depicted as including a power supply (PS) **184**, a set of sensors **186**, a controller **188**, an interface

US 11,213,601 B2

11

190, output device(s) 192, dispenser firmware 194, heating element(s) 196, and any number of vials 205a . . . 205n (individually or collectively also referred to as simply 205). The components 184, 186, 188, 190, 192, and 196 are communicatively coupled via a communications bus 198. The controller 188 may include a non-transitory memory device, or may be coupled to a non-transitory memory device also coupled for communication via the bus 198. The non-transitory memory device may store software that specially configures the controller, such as the dispenser firmware 194. The PS 184 may be any AC and/or DC power supply for powering the scent dispenser 132. The controller 188 is a microchip that controls the constituent electronics (e.g., sensor(s) 186, output device(s) 192, interface 190, heating element(s) 196, etc.) of the scent dispenser. A non-limiting example of the controller 188 may include an ARM-based microcontroller, such as one manufactured by Mouser Electronics under PN PIREEL, although it should be understood that other chip architectures are also applicable, that the controller 328 may be combined with other processors, and/or that numerous other variations are possible, contemplated, and applicable.

The set of sensor(s) 186 may include a vial sensor for sensing the fill level of the vial(s) 250 installed in the scent dispenser 132, optical sensor(s) for detecting an identity of vial(s) installed in the scent dispenser 132, temperature sensors (e.g., thermocouples, etc.) for sensing the temperature of the heating element(s) 196, ambient light sensor to detect a light level in a surrounding environment (e.g., room), and/or a motion sensor to detect motion in the surrounding environment, etc.

In some embodiments, the sensors 186 may include a temperature bay sensor for each heating element 196 (e.g., that may measure temperatures ranging from (-50 to 200 degrees Celsius), the vial sensor 300 (e.g., see FIG. 3A), an ambient light sensor, etc.). The heating element 196 may be configured to heat to any suitable temperature sufficient to diffuse a scent solution contained in a corresponding vial 250, a non-limiting example of which may be 65 degrees Celsius, and the temperature bay sensor 186 may be mounted on or adjacent to, or embedded in, the heating element 196 to measure the temperature of the heating element 196 and provide feedback to the controller 188, which may cyclically heat the heating element 196 based on the feedback to maintain a constant or substantially constant temperature during diffusion (as set in the state settings).

The sensors 186 include a transceiver having a wireless interface configured to communicate with the devices coupled to the network 102, such as the access point 120, the dispenser management server 150, and/or other components of the network 102 using standard communication protocols, such as Internet protocols. Further, the transceiver may be configured to wirelessly transmit data via a meshwork network made up of a plurality of scent dispensers 132 and/or other devices, such as the access point 120 or a mobile device 106. By way of further example, the transceiver may transmit data to the access point 120 to which it is linked using a protocol compliant with IEEE 802.15, such as Zigbee®, Z-Wave®, Bluetooth®, or another suitable standard. Additionally or alternatively, one or more of the scent dispenser(s) 132 and/or the access point 120 of an installation 158 may be wired for direct communication and the wired components may exchange data using wired data communication protocols. Further embodiments are also possible and contemplated. In some embodiments, the transceiver may be embedded in the controller 188 or may be a

12

component distinct from the controller and coupled to the controller 188 via the bus 198.

The output device(s) 192 may include light sources and/or audio reproduction devices, although further suitable output devices are also contemplated and applicable. The light sources and/or audio reproduction devices may be controlled to produce output consistent with a scent being emitted by the scent dispenser (e.g., a low, soothing light and music may be output in conjunction with a relaxing scent being emitted).

Returning to FIG. 1A, the client device(s) 106 (also referred to individually and collectively as 106) are computing devices having data processing and communication capabilities. In some embodiments, a client device 106 may include a processor (e.g., virtual, physical, etc.), a memory, a power source, a network interface, and/or other software and/or hardware components, such as a display, graphics processor, wireless transceivers, keyboard, camera, sensors, firmware, operating systems, drivers, various physical connection interfaces (e.g., USB, HDMI, etc.).

The client devices 106 may couple to and communicate with one another and the other entities of the system 100 via the network 102 using a wireless and/or wired connection. Examples of client devices 106 may include, but are not limited to, mobile phones (e.g., feature phones, smart phones, etc.), tablets, smartwatches or other smart wearables, laptops, desktops, netbooks, server appliances, servers, virtual machines, TVs, set-top boxes, media streaming devices, portable media players, navigation devices, personal digital assistants, etc. In addition, while a single client device 106 is depicted in FIG. 1, it should be understood that any number of client devices 106 may be included.

As shown, the client device 106 may include a scent application 108, which allows the user to set scent dispenser 132 settings, turn scent dispensers 132 on and off, purchase vials for the scent dispenser 132, set up a scent dispenser 132, register an account, set up a premises and the rooms of the premises, associate a scent dispenser 132 with a particular room of the premises, view analytics reflecting the user's historical use of his/her scent dispenser(s) 132, enable user profiles to use and setup scent profiles for the scent dispenser (s) installed in the premises, set a profile hierarchy (e.g., set which user profile(s) is/are the dominant user profile), etc.

The client device 106 may store the scent application 108 in non-transitory memory, retrieve the scent application 108 from memory, and execute instructions comprising the scent application 108. The scent application 108, when executed by a processor of the client device 106, configures the processor of the client device 106 to carry out the acts and functionality described herein. In some embodiments, the scent application 108 may render and display various interfaces for carrying out the functionality described herein, such as but not limited to those depicted in FIGS. 14A-20B.

In particular, FIGS. 14A-14H are graphical representations of user interfaces for setting up a scent dispenser 132. For instance, FIGS. 14A and 14B depict the user interface 1400 for logging into and/or registering an account with the scent service. The user may enter his/her credentials (e.g., email and password) in the fields 1402 or 1406, may select corresponding interface elements (e.g., sign in or sign up) to submit the credentials depending on whether the user is logging into an existing account or creating a new account. Upon submission of the form fields, the scent application 108 may transmit the credentials to the dispenser management application 160 and authenticate instance of the scent application 108.

US 11,213,601 B2

13

Upon receiving a response from the dispenser management application **160** that the authentication is successful, the scent application **108** may proceed to display the user interface **1408** depicted in FIG. **14C**, which includes a summary of the steps for setting up a scent dispenser **132** and a user interface element **1410** for beginning the setup process, which is selectable by the user. Upon following the instructions (e.g., plugging in the scent dispenser **132**), and selecting the element **1410**, the scent application **108** displays user interface **1412**, which includes instructions prompting the user to connect his/her user device **106** (e.g., mobile phone) to a wireless network broadcasted by the scent dispenser **132**. An unregistered scent dispenser **132**, when first plugged into an electrical socket, proceeds through a boot sequence of the default firmware stored in the memory of the scent dispenser **132**. As part of the boot sequence, the firmware determines that the scent dispenser has not yet been initialized and proceeds to broadcast a wireless network via which the user connects his/her user device and the user can configure the scent dispenser **132**.

In some embodiments, when a scent dispenser **132** is booted, it registers its functions with the dispenser management application **160**, and may resume the device's last previously known state. If the state is unknown the heating elements **196** may be disabled. In some embodiments, if the state is different from what the controller **188** may programmed to expect (e.g., a scent volume has changed significantly), an alert may be published and the heating elements **196** may be disabled. In some embodiments, when the scent solution of a vial is depleted (e.g., drained to the lowest detectable level) the heating element **196** may be disabled and an event may be published to the dispenser management application **160**, which may in turn, send a notification to the client device **106** of that user (which may be registered in the usage data for the user of that scent dispenser **132**) to notify the user that the scent has run out and is no longer being diffused, as well as provide an option for repurchase.

As shown in FIG. **14D**, the user may select the network broadcasted by the scent dispenser **132** using user selectable element **1414** of the user interface **1412**, and upon successfully connecting to the network, may proceed to configure the scent dispenser **132**. In FIG. **14E**, the user interface **1416** includes a list of user selectable networks accessible in the location which the user stands and is presumably associated with the premises in which the scent dispenser **132** is installed. Upon selecting one of the networks from the list **1418**, the scent application **108** displays user interface **1420**, which includes a set of user interactable elements such as a password entry field and a save button. Upon entering the password and selecting save, the scent application **108** transmits data describing the selected wireless network and password to the scent dispenser **132** via the wireless network broadcasted by the scent dispenser **132**, and the firmware stores the data for that wireless network in the memory of the scent dispenser **132**, the proceeds to connect the scent dispenser **132** to that selected wireless network. Upon successfully connecting to the network, the firmware may run other checks such as verifying that the scent dispenser **132** can connect to the dispenser management server **150** via the network, and can register that dispenser **132** to the user. The dispenser management application **160** may receive the configuration information entered via the interfaces depicted in FIGS. **14A-14E** and may store that information as user data **174** in the data store **170**. The user interface **1424** depicted in FIG. **14G** includes graphical user interface elements showing the completed and yet to be completed

14

steps involved in the configuration. The user interface **1426** depicted in FIG. **14H** includes information confirming successful registration of the scent dispenser **132**, and includes a user selectable interface element **1430** for installing one or more scent vials in the scent dispenser **132**.

FIGS. **15A-15H** are graphical representations of user interfaces for configuring vial settings of a scent dispenser. For example, FIG. **15A** depicts a user interface **1500** including a set of user selectable interface elements for user account settings. For example, a user may select to disable all schedules and manually turn on and off the scent dispensers **132** registered with the user's account using the scent application **108**. Alternatively, the user may select to enable the schedules (which may be configured using other interfaces, such as those described elsewhere herein). The user may also select to add a new scent dispenser **132**, add a vial **250** to a scent dispenser **132**, replace a vial **250** with another vial **250** in the scent dispenser **132**, and enable a geofencing option as described elsewhere herein. Upon changing the user account settings, the scent application **108** may transmit user data reflecting the changes to the dispenser management server **150**, and upon receipt thereof, the dispenser management application **160** may update the user data associated with the user to reflect the revised settings. The settings associated with the user and his/her scent dispenser(s) **132** may also be referred to herein as a user profile, and may be stored as user data **174**. The scent vial configuration (e.g., which fragrance types and/or specific vials are installed in a given scent dispenser **132** or set of scent dispenser(s) **132**) may also be referred to herein as a scent profile of that/those scent dispenser(s) **132**, and may be stored as dispenser data **172**.

FIG. **15B** depicts a user interface **1504** displayed by the scent application **108** that includes user configurable interface elements **1506** for revising the user's personal information and/or account type, and user configurable interface elements **1508** for inputting address and payment information.

FIG. **15C** depicts a user interface **1510** displayed by the scent application **108** for installing a scent vial **250** into a first slot of a selected scent dispenser **132** registered to the user. The user interface **1510** instructs the user to insert the scent vial **250** into the first slot (e.g., slot labeled **1**, slot on left, etc.), and upon doing so, select the user selectable interface element **1514** to continue the installation process. Next, the scent application **108** displays user interface **1516**, as depicted in FIG. **15D**, which includes a user selectable list **1518** of available scents and requests the user to select which scent the user installed into the first slot. Upon confirmation of the type of scent the user selected by selecting the user interface element **1520** configured for confirming the selection (e.g., save and continue), the scent application **108** transmits the installation information to the dispenser management application **160**, which then stores the scent dispenser **132** information in the data store **170** (e.g., as dispenser data **172**, and user data **174**, etc.) in association with the user's user ID and the scent dispenser's **132** device ID.

FIGS. **15E** and **15F** depict user interfaces **1522** and **1528** for installing additional vial(s) in the scent dispenser **132** (e.g., in the second slot). The content and the functionality of the interfaces **1522** and **1528** are substantially similar to those described with respect to FIGS. **15C** and **15D** and will not be repeated here. It is noted that, once installation is complete and the second vial type is saved, the scent application **108** may transmit the installation information to

US 11,213,601 B2

15

the dispenser management application **160** for storage in a manner substantially similar to that described with respect to FIGS. **15C** and **15D**.

FIG. **15G** depicts a user interface **1534** for associating the scent dispenser **132**, and thus the scent types installed in the scent dispenser **132**, and in some cases, the specific identities of the first vial **250** and/or second vial **250**, with a particular room of the premises. The interface **1534** may include a user selectable list **1536** of rooms as well as a field for entering a custom room description for the room that the user selected from the list **1536**. Upon selecting interface element **1538** (e.g., save and continue), the scent application **108** may transmit installation data reflecting the room of the premises in which the scent dispenser **132** is installed. The dispenser management application **160** may receive and store this data in the data store **170** (e.g., as premises data **180**, etc.) in association with the scent dispenser ID, the premises ID, and/or the room ID, etc.

FIG. **15H** depicts a user interface **1540** to confirm that the installation process for installing the vial(s) in the scent dispenser **132** is complete, which includes a list of information about the installation, such as the room in which the scent dispenser **132** is installed, and identify information about the scent installed in the scent dispenser **132**. The user may exit the installation process by selecting the user interface element **1542**.

FIGS. **16A-16E** are graphical representations of user interfaces for scheduling scent dispensation for one or more rooms. FIGS. **16A-16C** depict the user interface **1600**, which includes a set of user interface elements **1602** and **1604** that are user configurable to set a schedule for a scent dispenser **132**. In particular, using the set of user interface elements **1602** and **1604**, the user may activate the device, and select a start and end time for scent dispensation. Further, the user may adjust the scent intensity and select whether to illuminate the light of the sensor during scent dispensation, and select to add additional scent schedules to the device, such as a schedule of different time and/or day for an alternative scent, etc. While not depicted, the set of user interface elements **1602** may also include a day calendar from which the user may select particular days of the month in which to schedule the scent dispensation. The user may select a one-time schedule or reoccurring schedule using the interface elements **1602** and **1604**.

FIG. **16D** depicts a user interface **1608** that includes a set of user interface elements **1610** in which the user may customize the color of the light that may be output by the scent dispenser **132** during scent dispensation. In some embodiments, the user interface **1608** may include an automatically selected color that is determined to correspond with the scent scheduled to be dispensed (e.g., relaxing bath). In some embodiments, the user may manually select and/or customize which color should be illuminated, or select from a list of previously selected colors that the scent application **108** stored or retained in memory. FIG. **16E** depicts a user interface **1612** for selecting a custom color for the light using user interface elements **1614** (e.g., intensity selector, hue selector, etc.). Upon configuring the schedule and light settings, the scent application **108** may transmit the schedule data reflecting the settings to the dispenser management application **160**, which may store the settings in the data store **170** (e.g., as user data, dispenser data, etc.) in association with the user's user ID, the scent dispenser **132** ID, etc.

FIG. **17** is a graphical representation of a user interface **1700** for viewing vial properties of an installed vial. As shown, the vial depicted in the interface **1700** has a 45%

16

capacity. This fill level may be determined by the vial sensor of the scent dispenser **132** configured to detect fill level of the vial. The controller of the scent dispenser **132** may transmit the fill level data received from the vial sensor to the dispenser management application **160** for processing and/or storage in the data store **170** as usage data **178** in association with the scent dispenser **132** ID, the user ID associated with the scent dispenser **132**, etc. The user interface **1700** includes user selectable options **1702** for saving that scent type to the user's account (e.g., as reflected by the user data **174** associated with the user ID of that user) and/or ordering replacement/refill vial **250** from an online marketplace hosted by the dispenser management application **160** and/or another e-commerce server or service coupled to the network **102**.

FIGS. **18A-18M** are graphical representations of user interfaces of electronic marketplace for (re)ordering vials. FIG. **18A** depicts a user interface **1800** including interface elements **1802** selectable for viewing information about scents currently installed in the scent dispenser(s) **132** of the user, viewing all available scent types, and viewing scent types by various categories such as room type.

FIG. **18B** depicts a user interface **1806** including user interface elements **1808** selectable for viewing scent types by room type. For instance, upon selecting a bedroom room type, the scent application **108** may display the user interface **1810** depicted in FIG. **18C**, which includes a list **1812** with which the user may interact to view information about different scent types that are recommended for use in the bedroom.

FIG. **18D** depicts a user interface **1814** including user selectable interface elements **1816** for viewing scent types by category or theme. For instance, the user may select to view different scents recommended for relaxation, such as those depicted in FIG. **18E**, which displays the user interface **1818** including a user-selectable list **1820** of scents. FIG. **18F** depicts a user interface **1822** that includes a user selectable list **1824** of all available scent types. The user may select a scent from the various lists depicted in the forgoing figures to view additional information about that scent. An example interface **1826** displaying detailed information about a scent is depicted in FIG. **18G**. As shown, the user may review information about the scent and use the user selectable interface elements **1828** to either save the scent to the user's **112** account for later purchase, or to purchase immediately.

In some embodiments, the scent service embodied by the dispenser management application **160** may provide a subscription service to the user in which a certain number of scent vials are automatically shipped to the user (e.g., monthly). The user, using the interfaces depicted in FIGS. **18A-18M**, browses and selects the scent vials **250** to add to an upcoming shipment and/or future shipments. When the time comes, a fulfillment center associated with the scent service automatically fulfills the items selected by the user for purchase. For instance, as depicted in FIG. **18G**, the interface **1826** includes a user-selectable option for the user to add the scent vial **250** to the next shipment (e.g., add to box.). Upon selection of the interface element, the scent application **108** may transmit order data reflecting the addition of the scent vial **250** to the next shipment, and the dispenser management application **160** may store the order information as user data **174** in association with the user, which may be transmitted to a fulfillment center system to facilitate fulfillment of the order.

FIG. **18H** depicts a user interface **1830** reflecting scent vials that the user has saved to his/her profile for later

US 11,213,601 B2

17

ordering. Upon selection of one or more of the user selectable interface elements **1832** (e.g., add buttons), corresponding scent vials may be selected for purchase/shipment.

FIGS. **18I** and **18J** depict a user interface **1834**, which includes user interface elements **1836** reflecting the items selected to be included in the user's next shipment, as well as interface elements **1838** including information reflecting when the shipment will occur.

FIG. **18K** depicts a user interface **1842** including user interface elements **1844** reflecting the current shipment confirmation and previous shipment confirmations. FIG. **18L** depicts a user interface **1846** including user interface elements **1848** providing the user the option to add additional items to a pending shipment, a new shipment, or a subsequent subscription service shipment. FIG. **18M** depicts a user interface **1850** including user interface elements **1848** completing a purchase transaction for purchasing scent vials.

FIGS. **19A-19F** are graphical representations of user interfaces for viewing and configuring room, schedule, and dispenser settings. FIG. **19A** includes information about which scent dispensers **132** are currently on and which scent dispensers **132** are scheduled to turn on. The information also reflects the scent being dispensed or scheduled to be dispensed by the corresponding scent dispensers **132**. The user interface **1900** includes user-selectable interface elements **1902** for modifying the settings of the currently active scent dispensers **132**, as well as user-selectable interface elements **1904** for modifying the settings of the currently dormant scent dispensers **132** and the scent dispensers **132** which are turned off. As the state of the scent dispensers **132** change over time, the dispenser management application **160** may send refreshed operational data for the scent dispensers to the scent application **108**, and the scent application **108** may refresh interfaces described herein to reflect the current operational state and/or configurations of the scent dispensers **132**. Information about each of the scent dispensers **132** registered to the user, including which scents are installed in the scent dispensers **132** and the rooms that the scent dispensers **32** are installed in, can be retrieved by the scent application **108** from the dispenser management application **160**. Correspondingly, the dispenser management application **160** may retrieve this information from the data store **170**, as described elsewhere herein.

FIG. **19B** depicts a user interface **1906** for viewing the details of a particular room (e.g., Lukas' bedroom). The scent application **108** may display the interface **1906** responsive to the selection of a room/scent dispenser **132** in the interface **1900** depicted in FIG. **19A**. The user interface **1906** may include the current **1908** and upcoming schedules **1910** for the scent dispenser(s) **132** installed in Lukas' bedroom. For example, currently a scent dispenser **132** in Lukas' bedroom is actively dispensing relaxing bath (until 7 PM), and is scheduled to dispense a calming scent (between 7 PM and 10 PM). A user may select any of the listed schedules, and modify that schedule and/or turn off the scent dispenser **132** using a corresponding interface, as discussed elsewhere herein.

FIG. **19C** depicts a user interface **1912** including a user selectable interface toggle **1914** for toggling the scent dispenser **132** in a particular room (e.g., guestroom) on and off. In this case, turning the scent dispenser **132** off/inactive overrides the schedules defined for that scent dispenser **132**. Using the user selectable interface elements **1916**, the user may select any of the scheduled times for modification, and responsive thereto, the scent application **108** may display a schedule editing interface, as discussed elsewhere herein.

18

FIG. **19D** depicts a user interface **1918** including user-selectable interface elements **1920** for editing different aspects of the scent schedule, such as the time the scent dispensation is scheduled to occur, whether or not to illuminate a light, and the intensity of the scent dispensation, as discussed elsewhere herein.

The user interface **1922** in FIG. **19E**, which may be displayed responsive to the selection by the user to edit the light settings in the user interface **1918**, provides the user options **1924** for configuring the intensity and hue of the light to be illuminated during the scheduled time.

FIG. **19F** depicts a user interface **1926** including a user configurable interface element **1928** for adjusting scent dispensation intensity during the scheduled time. For example, the user may use the slider to adjust the intensity up and down. The intensity setting, as with any other of the settings described with reference to the interfaces, may be transmitted to the dispenser management application **160** and stored in the data store **170** and/or transmitted to the scent dispenser **132** as operational settings.

FIG. **20A** is a graphical representation of a user interface **1930** including a notification prompting the user to install a new or replacement vial. The notification may include a user selectable interface element **1932** for installing a new scent vial. Responsive to the selection of the element **1932**, the scent application **108** may provide the user with instructions on how to swap out the old/empty vial with a new vial **250** and/or provide the user with options to purchase additional scent vials **250**.

FIG. **20B** is a graphical representation of a user interface **1934** for disabling geolocation-based control of scent dispensation. In some embodiments, responsive to the user, and the user's mobile device **106**, leaving the premises that is registered to the user (e.g., as reflected by geofence settings stored as user data **174** in the data store **170** and/or the memory of the mobile device **106**), the scent application **108** may display the user interface **1934** notifying the user that all of the scent dispensers **132** on the premises were automatically turned off/made inactive because the user was not present at the premises. The user interface **1934** further provides the user selectable interface element **1936** for disabling the automatic turning off of the scent dispensers **132** upon leaving the premises. Upon selecting the user interface element **1936**, the scent application **108** transmits updated setting to the dispenser management application **160** instructing the sensor management application **160** to update the user's account to reflect not inactivating the scent dispensers **132** when the user leaves the premises.

Returning to FIG. **1**, the dispenser management server **150** may include one or more computing devices having data processing, storing, and communication capabilities. For example, the server **150** may include one or more hardware servers, virtual servers, server arrays, storage devices and/or systems, etc., and/or may be centralized or distributed/cloud-based. In some embodiments, the server **150** may include one or more virtual servers, which operate in a host server environment and access the physical hardware of the host server including, for example, a processor, memory, storage, network interfaces, etc., via an abstraction layer (e.g., a virtual machine manager).

While not depicted, the server **150** may include a (physical, virtual, etc.) processor, a non-transitory memory, a network interface, and a data store **170**, which may be communicatively coupled by a communications bus. Similarly, the client device **106** may include a physical processor, a non-transitory memory, a network interface, a display, an input device, a sensor, and a capture device. It should be

US 11,213,601 B2

19

understood that the server and the client device may take other forms and include additional or fewer components without departing from the scope of the present disclosure.

Software operating on the server **150** (e.g., the dispenser management application **160**, an operating system, device drivers, etc.) may cooperate and communicate via a software communication mechanism implemented in association with a server bus. The software communication mechanism can include and/or facilitate, for example, inter-process communication, local function or procedure calls, remote procedure calls, an object broker (e.g., CORBA), direct socket communication (e.g., TCP/IP sockets) among software modules, UDP broadcasts and receipts, HTTP connections, etc. Further, any or all of the communication could be secure (e.g., SSH, HTTPS, etc.).

As shown, the server **150** may include a dispenser management application **160** embodying a remotely accessible scent service. The dispenser management application **160** may send data to and receive data from the other entities of the system including the controllers **188** and/or **328**, the mobile device(s) **106**, etc. The dispenser management application **160** may be configured to store and retrieve data from one or more information sources, such as the data store **170**. In addition, while a single server **150** is depicted in FIG. 1, it should be understood that one or more servers **150** may be included.

In some embodiments, the dispenser firmware **194**, the scent application **108**, the dispenser management application **160**, etc., may require users to be registered to access the acts and/or functionality provided by them. For example, to access various acts and/or functionality provided by the scent application **108**, dispenser management application **160**, and/or scent dispensers **132**, these components may require a user to authenticate his/her identity (e.g., by confirming a valid electronic address). In some instances, these entities **108**, **132**, **150**, etc., may interact with a federated identity server (not shown) to register/authenticate users. Once registered, these entities **108**, **132**, **150**, etc., may require a user seeking access to authenticate by inputting credentials in an associated user interface.

FIGS. 2A-2G are various views of an example scent dispenser **132**. As shown, the scent dispenser **132** includes a housing **200** that houses the components of the scent dispenser (e.g., vial coupling(s), heating element(s), vial sensor, etc.).

The housing **200** includes a body **202** and a detachable lid **204**. The backside **212** of the housing includes a plug **206** that can be plugged into a conventional outlet (e.g., **146**) to power the device. The scent dispenser **132** also includes one or more electronic interfaces, such as USB port **208**, which the user can utilize to charge other devices, plug the scent dispenser into a computer to update firmware, set settings, etc. The housing **200** may also include one or more output devices **210**, such as LED(s), which are discussed further below.

As shown in FIG. 2C, the lid **204** of the dispenser **132** is removable to provide access to one or more scent vials **250** (e.g. in this case two, although conceivably any number of scent vials can be included), which can be inserted into a cavity **220** exposed by the lid when removed. In particular, when the lid **204** is removed, it exposes an inner surface **216** including a concave surface **218** that forms the cavity **220**. The lid/removable cover **204** can be (re)attached to the front side/inner surface **216** of the housing **200** to cover the opening/cavity **220** providing access to the vial(s) **250**.

The cavity **220** includes two slots **222** (left and right from a front view) in the depicted embodiment, although it should

20

be understood that any number of slots maybe included to accommodate any number of scent vials **250**. Each slot **222** accommodates a corresponding vial **250**, which contains particular scent solution (not depicted).

The front side/inner surface **216**, which is exposed when the lid **204** is removed, includes a (e.g., second) set of magnetic fasteners **226** that are configured to magnetically detachably attached to a corresponding (e.g., first) set of magnetic fasteners **228** included in the removable cover/lid **204**. For instance, the lid **204** may include a set of magnetic fasteners **228** on an inside surface (not shown) of the lid that abuts the inner surface **216** that engage with the set of magnetic fasteners of the body when the lid is situated abuttingly with the front side/inner surface **216** of the housing **200** of the scent dispenser **132**.

FIGS. 5A and 5B are various views of an example vial **250**, although it should be understood that the vial **250** may take other forms and have different dimensions. The solution may include chemical(s) that are processed by the scent diffuser **132** to diffuse or nebulize it within the room in which the scent dispenser **132** is placed. The solution in some embodiments may be a liquid perfume, an essential oil, or other suitable solutions. In some alternative, the perfume or essential oil may be caked and the caked substrate may be heated to diffuse the scent. A vial **250** may be made of any suitable material, such as plastic, metal, ceramic material, glass, etc.

In some embodiments, a vial **250** (e.g., a first vial, second vial, etc.) may include a first side **264**, one or more sidewalls **266**, and a second side **268**. For example, a vial **250** having a tubular sidewall may be a continuous around a circumference. In another example, a vial **250** having a square, triangular, rectangular, etc., cross-section (e.g., halfway between the second side **268** and the first side **264**) at a middle of the sidewall, may have a plurality of sidewalls that are joined along at the corners of the cross-section. It should be understood that the vial **250** may have any shape. The one or more sidewalls **266** connecting the first side **264** to the second side **268**. The first side **264**, the one or more sidewalls **266**, and the second side **268** collectively form an inner cavity (e.g., see FIGS. 4A-4D). The first side **264** includes an opening **262** through which a solution containable in the inner cavity can be dispensed from the vial **250**.

In some embodiments, the first side **264** includes a neck **258** forming the opening **262**, and the sidewall(s) **266** and second side **268** form a hollow body **256**. The hollow body forms a cavity containing the scented solution. A wick **252** may extend from the cavity through the opening **262** of the neck **258**.

As shown in FIGS. 5A and 5B, in some embodiments, the vial **250** may include a stopper **254** and a wick **252**. The stopper **254** inserts into an opening **262** of the vial **250** and forms a seal against an inner surface of the neck **258**. The stopper **254** includes a through-hole **251** extending through a center portion of the stopper **254** from an outer surface **255** of the stopper to an inner surface **254** of the stopper **254**. The through-hole/opening **251** is formed in the stopper to allow a wick inserted into the cavity of the vial **250** to extend outwardly from the through-hole **251**, and thus the opening **262** of the first side **264**.

FIG. 2D is an exploded view of the scent dispenser **132** housing **200** with the lid **204** removed. As shown, the scent dispenser **132** includes a back housing portion **233** and a front housing portion **231** that are attachable using one or more fasteners **232** (e.g., screws, snaps, etc.). The back housing portion **233** and the front housing portion **231** collectively enclose and retain the electronics of the scent

US 11,213,601 B2

21

dispenser 132. In the depicted example, the dispenser's 132 electronics may include a controller 188 that controls the components of the scent dispenser 132. In some embodiments, the scent dispenser 132 includes multiple circuit boards (e.g., a sensor board 237, a main board 235), although it should be understood that the boards could be combined or further split up, etc. In the depicted embodiment, the main board 235 includes the controller 188. FIGS. 21-25 are schematic diagrams of various example electronics of the scent dispenser 132 illustrating wiring and features of the electronics that would be readily interpretable and understandable by one having skill in the art. In particular, FIG. 21 is a schematic diagram of an example controller 188, which includes a wireless communications chip (e.g., the interface 190); FIG. 22 is a schematic diagram of an example PS 184; FIG. 23 is a schematic diagram of an example heating element circuit including the heating element(s) 196; FIG. 24 is a schematic diagram of an example sensor 186, such as a temperature sensor configured to sense the temperature of a heating element 196 and provide the temperature to the controller 188 for temperature feedback control; FIG. 25 is a schematic diagram of an example output device 192, such as an array of LEDs controllable by the controller 188 based on light settings set using the scent application 108.

In FIG. 2E, a retaining mechanism 248 of the vial 250 couples with a corresponding retaining mechanism 246 included in a slot of the scent dispenser 132. In some embodiments, the vial retaining mechanism 248 may include first and second vial couplings 244. The first and second vial couplings 244 receive and detachably retain the first side 264 of the first and second vials 250, respectively. In some instances, the first and second vial couplings 244 include one or more surfaces shaped to engage with and secure the neck 258 of the first side 264 of the first and second vials 250.

As shown, the retaining mechanism 248 may be a protrusion extending outwardly from a surface of the vial, such as the neck or the body of the vial. In the specific example depicted, the protrusion extends around the circumference of the neck 258 of the vial 250, and the retaining mechanism 246 includes one or more coupling devices 244 that engage with the retaining mechanism 248. In some embodiments, the coupling devices 244 may comprise one or more fasteners formed to detachably engage with the neck of the vial. For instance, the coupling devices 244 may include one or more clips protruding outwardly from a stopping member 249 along the neck 258 of the vial 250 toward the body 256 of the vial 250. The clips include protrusions protruding inwardly toward the neck such that they engage with and hold the protrusion 260 of the neck 258.

It should be understood that other variations for the retaining mechanism 248 and 246 are also possible and contemplated. For instance, the protrusion 260 may engage with corresponding channels formed in a surface of the retaining mechanism 246 into which protrusion 260 slides into an opposing side(s). In another example, the neck 258 includes a groove and the retaining mechanism 246 includes corresponding protrusions or rails that mate with the groove. Numerous other variations are also possible and contemplated.

As illustrated in FIGS. 2F and 2G, the scent dispenser 132 may include a heating element(s) 196 to heat the solution from the vial(s) 250 installed in the scent dispenser 132. In some embodiments, the wick 252 passes a scented solution to the heating element 196. The heating element 196 diffuses the scented solution by heating the scented solution to the temperature level regulated by the controller 188.

22

An example heating element 196 may include a ceramic material (e.g., ceramic resistor, such as a wire wound ceramic heating element). Heating the solution received from the vial 250 accelerates diffusion of the solution into the surrounding air. The housing 200 may include one or more ports 214 in the lid 204 to allow the diffused air to pass into the surrounding environment, as shown in FIGS. 2A and 2B. The more heat applied by the diffusion device, the stronger the evaporative rate and thus the stronger the smell that may be produced.

In some embodiments, a scent solution of a vial 250 may require a certain heating range to be diffused effectively, and the controller 188 may receive specific state settings for that scent solution from the dispenser management application 160 and use those settings to control the temperature of the corresponding heating element 196.

In the depicted embodiment, the vial retaining mechanism 246 includes wick receiver(s) for receiving the end(s) of the wick(s) 252 of the installed vial(s) 250 and passing them to the heating element(s) 196. For instance, the scent dispenser 132 may include a first (e.g., left) heating element 196 situated on a side of the stopping member 249 opposing a first (e.g., left) vial 250, and a second (e.g., right) heating element 196 situated on the side of the stopping member 249 opposing the second (e.g., right) vial. The first heating element 196 heats an end of the wick 252 extending through the wick hole 247 of the first wick receiver 243, and the second heating element 196 heats an end of the wick 252 extending through the wick hole 247 of the second wick receiver 243.

A wick receiver 243 may include a stopping member having a wick hole 247 extending through the stopping member 249 of the wick receiver 243. The wick hole 247 of the wick receiver 243 receives a wick 252 extending outwardly from the opening of the first side 264 of the vial 250 (e.g., see FIGS. 5A and 5B). Multiple wick receivers 243 may be included to match the number of vials being heated.

In some embodiments, a heating element 196 is shaped to receive and heat a wick 252 of a vial 250. For example, the heating element 196 (e.g., first, second, etc.) may include a ring 245b extending from a main body 245a that receives the end of the wick 252 extending through the wick hole 247 of the wick receiver 243. In some instances, a metallic heating wire may be wound in the main body 245a and the ring conducts the heat around the wick 252, although other variations are also possible and contemplated.

The electronics (e.g., 235) of the scent dispenser 132 include an intensity control unit that controls the intensity of diffusion by the diffusion device. For example, the controller 188 may use pulse width modulation (PWM) to digitally control the (analog) power provided to a heating element 196 of the diffusion device. The controller 188 is coupled to one or more temperature sensors (not shown but installed proximate and/or on the heating element(s) 196) to measure the temperature of the element(s) 196 and send feedback to the controller 188, which determines whether to increase or decrease the temperature based on the desired intensity setting, which may be stored in state settings in a non-transitory memory device coupled to the controller 188. The intensity setting may be variable based on the time of day or other parameters, and/or user-defined using the scent application 108, as discussed elsewhere herein.

In some embodiments, the diffusion device uses the above described PWM output control and temperature input data in conjunction with a PID (proportional, integral, derivative) control loop firmware algorithm. This is beneficial as it can increase the reliability, robustness, and ruggedness of the

US 11,213,601 B2

23

diffusion device. With proper system tuning, the PID control can help to ensure that the temperature will more accurately track the desired set point, with less over/undershoot. For instance, the following example code could be used by the controller **188**.

```

previous_error = 0
integral = 0
start:
    error = setpoint - measured_value
    integral = integral + error*dt
    derivative = (error - previous_error)/dt
    output = Kp*error + Ki*integral + Kd*derivative
    previous_error = error
    wait(dt)
    goto start

```

In further embodiments, in additional and/or alternative to a PID loop, the firmware may program the controller **188** to use a PI loop or other suitable feedback control loops to control the temperature.

As discussed herein regarding the inventive intensity control performed by the controller **188** in conjunction with the heating element(s) **196**, the scent dispensation may be digitally controlled through pulse width modulation (PWM). In some embodiments, the heating element switching discussed herein may also utilize the same or similar hardware and/or software to carry out those operations.

In some embodiments, through algorithmic direction from the instance of the scent application **108** (e.g., smart phone app), via the cloud platform described herein, and thereafter the dispenser's firmware, the hardware may be instructed to set at least one vial diffuser (heating element) to a PWM of zero (thus turning it off) and at least one other to some PWM value above zero (thus turning it on). Similar logic may also perform switching between vials **250**. In this example, the scent application **108** software logic, dispenser management application **160** software logic, and/or firmware **194** software logic may prevent and/or allow two or more vial diffusers (e.g., heating element circuitries) from being turned on simultaneously, although for other embodiments, they could be otherwise adapted if necessary.

In some embodiments, the firmware may program the controller to heat multiple elements **196**. In some embodiments, the heating of multiple elements **196** may be utilized to mix different scent solutions contained in different vials **250** installed in the scent diffuser **132**. In some embodiments, the heating of multiple elements **196** may be utilized to further increase the scent intensity in a given room in which the scent dispenser **132** is installed. Each scent solution may have a temperature range in which it can be effectively diffused (e.g., without cause burning of the scent solution). As such, a given heating element **196** may have a maximum rate at which a particular scent solution can be diffused (maximum temperature the scent solution can be diffused). Advantageously, to increase diffusion beyond the maximum rate for a given vial **250** and heating element **196**, the controller **188** may actuate a plurality of heating elements (e.g., a first, a second, etc.) configured to dispense the same scent solution. Further, a scent solution may have a particular temperature at which it optimally diffuses (e.g., below a maximal rate). Using plural heating elements allows the scent to diffuse at this rate while meeting the volume and/or intensity requirements of a given room. The firmware may retrieve state settings (e.g., received from the dispenser management application **160**) instructing the controller **188** to heat a plurality of wicks **252** at particular temperatures,

24

and the controller **188** may control the heating of the heating elements **196** accordingly. In further embodiments, the settings for different scents may be preloaded on the dispenser and the dispenser may adjust the heating of different scent solutions based on the store settings. The state settings received from the dispenser management application **160** may include data specifying which vial(s) to diffuse, the temperature at which to diffuse the solution from the vial, how long to diffuse the solution for, etc.

The controller **188** may listen for updated scent settings (e.g., by sending iterative requests to the dispenser management application **160**, running a local server configured to listen for update requests including state settings from the dispenser management application **160**, etc.). Further, the controller may **188** send check-in requests to the dispenser management application **160** reporting the operational status of the dispenser **132**.

In some embodiments, state settings for scent dispenser **132** operation are synchronized with the dispenser management application **160**. The interface **190** may utilize any communication protocol that is suitable, such as 801.11 protocols (e.g., Bluetooth, Wi-Fi™, etc.).

The controller **188** may be programmed by the firmware to update the state settings when a user modifies the settings using an instance of the scent application **108** operating on his/her user device. The scent application **108** may transmit new and/or updated settings to the dispenser management application **160**, which is programmed to then synchronize the settings with the scent dispenser **132** if applicable. In addition, if the scent dispenser **132** is ever turned off, and/or the state settings are lost somehow (e.g., due to malfunction or power disruption), the scent dispenser may be reinitialized (e.g., by the controller **188** downloading the state settings and configuring the hardware of the scent dispenser **132** based on the settings). The controller **188** may receive settings via the interface **190** and update the settings stored in the non-transitory memory of the scent dispenser **132**. The non-transitory memory may be embedded in the controller **188** or may be a separate device that is coupled to the controller **188**. In some embodiments, the microcontroller may include MOSFET circuitry, the interface **190**, firmware, etc.

Any state information of the scent dispenser (e.g., the volume, available vials, vial in use, diffusion level, current LED color, etc.) can be communicated, via a wireless transceiver (e.g., the interface **190**) electronically coupled to the controller **188** that controls the above-noted electrical components, via the network **102** (e.g., the Internet) to the server **150**, which may relay the information via the network **102** to the scent application **108** operating on a computing device **106** of a user **112** (e.g., mobile device) that is associated with that scent dispenser **132**. This advantageously allows the user to view and react to the information in real time.

In some embodiments, the controller **188** may be electronically coupled (e.g., wired, wirelessly) to a motion sensor **186** (e.g., a passive infrared sensor (PIR), photocell, other suitable motion sensor, etc.) reflecting the presence or absence of people within a room in which scent dispenser(s) **132** are installed. The motion sensor **186** in some cases may be a device embedded in the scent dispenser **132** and/or may be a separate device that is installed in the premises and electronically coupled to the scent dispenser **132**. Other variations are also possible and contemplated.

Based on a predetermined duration of inactivity (e.g., no motion detection signals received from the motion sensor **186**), the controller **132** may deactivate the heating elements

US 11,213,601 B2

25

196 and suspend operation of the scent dispenser 132, or may reduce the diffusion intensity by a certain percentage or to a certain minimal threshold, to economize the scent solution. In the latter example, upon detecting motion within the room via the motion sensor 186 (e.g., based on a detection signal received from the motion sensor 186), the controller 188 may restore and/or increase diffusion. Data regarding presence in a given room through the day may be transmitted to the dispenser management application 160, stored as premises data 180 in the data store, and used to generate analytics about user preferences, such as whether users prefer to scent a room even though users aren't present, whether users prefer to scent a room only if users are present, whether users prefer to maintain a minimal scent in a room if users aren't present, etc. This may be determined using the usage data because the usage data may be time and/or date coded so that the rate of use, as well as the time of day, day of week, etc., usage occurred may be determined by the dispenser management application 160.

In some embodiments, the controller 188 may receive wireless signals broadcasted by other devices within transmission range, determine if the signals are broadcasted by other scent diffusers 132, process the strength of the signals belonging to the other scent diffusers 132, and adjust scent diffusion based on the signal strength of other scent diffusers 132 that satisfy a predetermined signal strength threshold, as discussed in further detail with reference to at least FIG. 8.

FIGS. 3A and 3B depict various aspects of an example vial sensor 300.

In some embodiments, the vial (e.g., volume) sensor 300 may be a sensing device for determining the volume level of the vial. The vial volume sensor may include a sensor, which produces an electric field. As the liquid volume in the vial 250 changes, the sensor 300 detects a change in the electric field and correlates the change into a volume change. Predetermined coefficients may be used by the controller 188 and/or 328 to perform the correlation and determine the vial volume reliably. In some cases, the sensor 300 is a capacitive sensing device, which is advantageous because it is inexpensive, robust, and uses a noncontact approach which reduces the probability of failure of the component over time due to the buildup of dirt, chemicals, etc. However, it should be understood that other ways of sensing the vial volume are also applicable, such as resistive, transmission line techniques (e.g., a probe sensor, etc.), and are encompassed by this disclosure.

FIG. 3A is a schematic diagram of an example vial sensor 300 and FIG. 3B is a block diagram of the example vial sensor 300. As shown, the vial sensor 300 includes a plurality of pads 302 that are wired to a controller 328. The pads 302 may belong to one or more arrays. As shown, the vial sensor 300 includes two arrays of pads 302 (those wired to ports P2-0 through P2-5 and those wired to P0-2 through P0-7). The controller 328 electrically charges the sensor pads 302 of each array, and detects a change in the signals received from the array, and determines a corresponding change in the fluid level of the scented solution of the vial.

A non-limiting example of the controller 328 may include an ARM-based microcontroller, such as one manufactured by Cypress Semiconductor under PN CY8C4124LQI-443, although it should be understood that other chip architectures are also applicable, that the controller 328 may be combined with other processors, and/or that numerous other variations are possible, contemplated, and applicable.

Further, as shown in FIG. 3B, the vial sensor 300 may include the controller 328 including pins 322 and a chip 330, resistors 324 connecting various pins 322 of the controller

26

328 to first, second, etc., arrays 354 of pads 302a-302n (e.g., via wires 326), a set of capacitors 332 to regulate the voltage powering the controller 328, and a testing and/or firmware flashing module 334.

It should be understood that the shape and dimensions of the pads 302 may vary based on implementation. Thus, while a certain number of pads (e.g., 6) of an array 322 are used by example to describe the vial sensor 300, any suitable number of pads 302 may be used to provide the functionality and benefits described herein. For instance, the sensor pads 302 may be nested, narrower, larger, horizontally or vertically disposed, place in a multidimensional array, etc.

In some embodiments, the wires 326, pads 302, and/or trace patterns 326 may comprise a conductive material, such as metal (e.g., PCB copper). The controller 328 may be programmed using firmware, which may be stored in an embedded or separate non-transitory memory device and loaded upon initialization of the scent dispenser 132. The firmware may program the controller 328 to sense the vials 250 as described herein, and provide sensory output to the controller 188 and/or other components.

In an example embodiment, the pads 302 of an array 322 may be spaced 1-2 mm apart and may include a plurality (e.g., 2, 3, 4, 5, 6, 7, 8, etc.) copper sensor pads, although other spacing dimensions, pad sizes, and number of pads may be used, as described elsewhere herein. In some instances, various pads 302 (e.g., top and bottom corner pads) may be connected through jumper options that allow for driven shield, ground, and normal sensor pad connection options. Further, sensor pad connections may be in series with in-line resistors to the chip pins 322 of the controller 328.

The circuitry/electronics of the vial sensor 300 may include resistors 324 between the pins of the microprocessor 328 and the sensor pads 302 to adjust the current being applied to the sensor pads 302 so they consistently charge to a level that allows for an electric field emitted by them to pass through the air between the sensor pads 302 and an adjacent vial sidewall 266 so the presence and/or absence of a solution contained in the vial 250 adjacent to the pad 302 may be detected. Further electronics of the vial sensor 300 may include resistors 324 located near the line of where a center line of an H-shaped vial sensor 300 meets a sensor region; I2C PSOC connections for tuner connectivity; digital ground pours on top/bottom of the PSOC mounting area, etc., although other variations are also possible and contemplated.

FIGS. 4A-4D are block diagrams depicting a progression for sensing a solution level of vial(s) 250 using a vial sensor 300. In FIG. 4A, the vial 250 is relatively full (e.g., 80%) of scent solution 250. The array of sensor pads 302 are electrically coupled to a controller and charged. A sidewall of each vial 250 is situated adjacent to a corresponding array 320 of sensor pads 302 (e.g., at a certain distance, which may predefined) within an array of electric fields 322. The array 320 of sensor pads 302 are electrically charged by the microcontroller 128 (responsive to an actuation signal from the controller 188 using power from the PS 184) to produce the array 322 of electric fields. The controller 328 detects changes in one or more of the electric fields 322 of the array as the solution 310 is dispensed from the corresponding vial 250 (responsive to heating by a corresponding heating element 196).

The vial sensor 300 may include any number of (e.g., two or more) arrays 322 of sensor pads 302 that are respectively arranged in alignment with the (e.g., two or more) vials 250 retained by the (e.g., two or more) vial couplings (e.g.,

US 11,213,601 B2

27

coupling device(s) 244). For instance, arrays 320 of sensor pads 302 may be situated along various sides (e.g., first, second, left, right, middle, etc.) of the vial sensor 300. Each array 320 of sensor pads 302 may be arranged in alignment with a corresponding vial 250 retained by a corresponding vial coupling, such as a vial coupling of the retaining mechanism 246. In embodiments, with multiple vials 250, the controller 328 charges multiple arrays 322 to sense the fill level of those vials 250.

As the solution is used up 310, and the fill level (also called fluid level or solution level) goes down, the signals provided by the sensor pads 302 change. For example, the signals 306 that are output to the controller 328 and/or 188 in FIG. 4A reflect that the bottom four sensor pads 302 detect a maximum capacitance reflecting that the portions of the vial 250 corresponding in location to those sensor pads 302 are full. However, the top two sensor pads 302 detect a minimum capacitance reflecting that the portions of the vial 250 corresponding in location to those sensor pads 302 are empty. The controller 328 and/or 188 may aggregate the signals and determine an overall fill level (e.g., 80%, 50%, 20%, 1%, etc.). As the solution is dispensed during operation, the solution level 310 drops, and as a result, the output to the controller 306 changes (e.g., in FIG. 4B, three pads register a minimum capacitance, one registers an high capacitance (e.g., less than the maximum but closer to the maximum than the minimum), and three register a maximum capacitance; in FIG. 4C, five pads register a minimum capacitance and two pads register a maximum capacitance; and in FIG. 4D, six pads register a minimum capacitance and one pad registers a low capacitance due to a trace amount of solution being left in the vial 250). The controller 188 may transmit usage data, such as the rate at which the solution of each vial drops, as determined using data from the vial sensor 300, to the dispenser management application 160 for storage and/or use in generating analytics, as described in further detail herein. In some embodiments, the output 306 may be output on a cycle, such as the duty cycle of the controller 328 and/or 188, although other timing variations are also possible and contemplated.

The controller 328 may detect changes in the one or more of the electric fields 322 as the solution 310 is dispensed from the corresponding vial 250. For clarity, the term controller, as used herein, may refer to the controller 188, the controller 328, or both the controller 188 and the controller 328, unless specifically described otherwise.

In some embodiments, the controller 188 may be electrically coupled to heating element(s) 196 and electrically coupled to array(s) of sensor pads 302 via the controller 328. The controller 188 may regulate the temperature level of the heating element(s) 196, and the controller 328 may receive signals from the array(s) 322 of sensor pads 302, and provide the signals to the controller 188 for processing. The controller 188 may process the signals to determine a fluid level of the vial(s) 250 and/or may relay the signals to dispenser management application 160, which may store the signals as usage data 178 in association with the scent dispenser 132 and/or vial(s) 250 and/or scent being dispensed (using their corresponding IDs). In some cases, a change in a signal received from a pad 302 may reflect a change in capacitance due to a reduction in the solution near the pad 302.

The controller 188 may be programmed to switch between, and or include multiple, vials 250 in implementation where a plurality of heating elements 196 and vial slots 222 are included in a scent dispenser 132. The circuitry of

28

the heating elements 196 may include a switch mechanism allowing for independent control and/or heating of the heating elements 196.

The heating element switching mechanism includes executable firmware logic and the switching circuitry of the heating elements 196. The heating element switching mechanism is configured to switch between the different solutions contained in the vials 250 so the scent dispenser 132 can diffuse different scents at different times. The controller 188 can control the operation of the heating element 196 based on a user-defined schedule or on-demand based on a user instruction submitted via the scent application 108 operating on the user's computer device 106. In addition, in some cases, the controller 108 can automatically instruct the heating element switching mechanism to switch from using one vial 250 to another vial 250 when the first vial 250 has run out of solution. Once switched, the previously active heating element 196 is switched off and another heating element 196 is turned on, which results in the scent heated by the other heating element 196 to begin diffusion and the former to cease diffusion. Further, the switching mechanism can allow for multiple heating elements 196 to be active at the same time at the same or different temperature levels, depending on the settings received from the dispenser management application 160.

Additionally, the scent dispenser 132 described herein may further amplify the efficiency of switching between or to include multiple scents. In some embodiments, to do so, the scent dispenser 132 utilizes a combination of additional software logic and the inclusion of bar and/or detectable objects (e.g., QR codes) on the vials 250. FIG. 13 depicts an example vial 1300 that includes an example detectable object 1302. The scent dispenser 132 may include an optical sensor to capture the detectable object 1302 and determine the identity of the vial 1300 based thereon.

In an example, a camera, scanner, etc., included on the main board 235 may scan a vial 250 upon insertion into a slot of the scent dispenser 132. The controller 188 may receive the captured data and identify the vial 250, and/or send the captured data to the dispenser management application 160, which may in turn identify the vial 250 and indicate the slot in which the vial 250 is installed. Upon identification of the vial 250, the controller 188 may load the scent diffusion settings for that vial 250 and slot (e.g., heating element 196), such as the temperature, heating duration, whether to actuate other output devices 192 and the parameters for actuating those output devices 192 (e.g., LEDs, audio reproduction device(s), etc.).

In another example, upon the user receiving a new vial refill, the scent application 108 executing on the user's mobile device may prompt the user 112 to either manually select within the scent application 108 the correct scent of the their new refill, or alternatively, utilizing an image capture device of the user's mobile device (e.g., the user's phone's bar code scanner/camera) to scan the detectable object, such as unique graphical image included on the vial 250 (e.g., the bar code, QR code, etc., on the vial). The scent application 108 and/or the dispenser management application 160 may identify specifically which scent solution the vial 250 contains and then associates it with the correct vial slot/insert position 222 in the dispenser 132 (e.g., by querying a table that includes this information using the unique identifier associated with the unique graphical image). This scanning process adds simplicity for the user and also increases the integrity of the collected data analytics. It also verifies which vials 250 are being used and can prevent counterfeit vials 250 from being used. This is advantageous,

US 11,213,601 B2

29

as some solutions that are homemade or non-authentic could be flammable, toxic, cause respiratory distress, or other issues.

In some embodiments, room profiles stored in the data store **170** and/or in a local memory, and may be used to control the level of diffusion and which scents are diffused by the scent dispenser over time. In addition, the room profile may include color and intensity settings for the devices of the scent dispenser, such as one or more lights (e.g., LEDs) included in the scent dispenser. The LED(s) may be variable LEDs that can produce virtually any color. These colors may be correlated with the scent being diffused from the different vials included in the scent dispenser to produce a different mood (relaxing, energetic, etc.) for the room at different times of the day, times of year, etc. The controller **188** may reference the state settings (e.g., reflecting the room profile) to determine how to control the level of intensity of diffusion, which vial **250** should be active, the level of intensity of the output devices (e.g., LEDs), the characteristics of the output devices (e.g., color, sound, etc.). Additionally or alternatively, the user may set the parameters of the output devices (e.g., intensity and color of the LED(s)), remotely using the scent application **108**, which the scent dispenser may receive and then implement responsive to receiving corresponding state settings from the dispenser management application **160**.

FIG. 6 is a flowchart of an example method **600** for sensing vial volume. In block **602**, the method charges the sensor array(s) **322**, and in block **604**, the method **600** heats heating element(s) **196** that are fluidly connected to the vial(s) **250**. In some embodiments, wick(s) **252** may fluidly connect the heating element(s) **196** with the vial(s) **250**. In further embodiments, the vial(s) **250** may be fluidly coupled to the heating element(s) **196** using other arrangements, such as heating the vial(s) **250** themselves, dripping scent solution into the vial(s) **250** (e.g., using a gravity fed configuration where the vial(s) **250** are still upside down), etc.

In block **606**, if the method **600** receives signals from or more sensor arrays **322**, the method **600** may proceed to determine the signal values in block **608**, compute vial fill level(s) using the signal values in block **610**, and transmit, in block **612**, the vial fill level(s) to the dispenser management server **150** for processing and/or storage by the dispenser management application **160**.

In block **614**, the method **600** determines whether the dispenser **132** is still active, and if so, proceeds to block **606** for another iteration. If, in block **614**, the dispenser **132** is no longer active (e.g. the scheduled scent diffusion presented, the scent dispenser **132** is inactivated (sometimes referred to as turned off), a loss of power occurred, etc.), the method **600** returns to block **616** and awaits actuation of the scent dispenser **132**. Method **600** may check (e.g., routinely, etc.) to see whether an actuation signal has been received, and upon receiving an actuation signal (e.g., responsive to a timer triggering, responsive to receiving state settings from the dispenser management application **160**, etc.), may return to block **602** and repeat the method **600**. If in block **608**, the signals of the received from the sensor array(s) **322**, the method **600** may wait until the signals received before proceeding to block **608**, and if too much time passes, may report an error and exit. If, in block **618**, no actuation signal has been received, the method **600** may continue to stay active and wait for an actuation signal to proceed.

FIG. 7A is flowchart of an example method **700** for activating a vial **250**. In block **702**, the scent application **108** may receive a vial identifier for the vial **250**. For example, using the user interface, the user **112** may enter the vial

30

identifier using an input device of a user device **106** that is executing the scent application **108**. In a further example, the user may capture an image object include on the vial **250**, and the scent application **108** may process the captured image object to determine the vial identifier. Other variations are also possible and contemplated.

In block **704**, the scent application **108** may identify the scent dispenser **132**. For example, the user may input an identification of the scent dispenser **132** into which the user intends to install/has installed the vial **250**, or the scent application **108**, using fill level data for the scent dispensers **132** registered to the user **112**. Based on the data stored in the data store **170**, the scent application **108** may provide a list of empty vials **250** that are installed in the scent dispensers **132**, and/or suggest the user replaceable of those vials **250** with the vial **250** corresponding to the vial identifier specified in block **702**.

Upon identifying the scent dispenser **132** into which the vial **250** is to be installed, the scent application **108** determines, in block **706**, into which slot **222** of the scent dispenser **132** user intends to install/has installed the vial **250**. This may be based on a user selection of the slot **222** using an input device of the user device **112** and a corresponding user interface presented by the scent application **108**, and/or based on a recommendation to the user on which vial **250** to replace based on the fill levels of the determined scent dispenser **132**.

In block **708**, the scent application **108** and/or the dispenser management application **160** may associate the vial **250** with the determined slot **222** of the scent dispenser **132**. For example, the dispenser management application **160** may store dispenser data reflecting the installation of scent in the slot **222** and/or associating a unique vial identifier with the slot **222**. This information may be used to generate analytics, often in conjunction with a multiplicity of other users, to determine user scent preferences behavior and generate corresponding data visualizations and graphical user interfaces for navigating the analytics.

FIG. 7B is flowchart of a further example method **750** for activating a vial **250**. In block **752**, a sensor **186** of the dispenser **132** detects that the vial **250** is inserted into one of the slots of the scent dispenser **132**. In some embodiments, the vial sensor **300** may detect the presence of the vial due to a large change in capacitance. In some embodiments, an optical sensor may detect the change in light, and RF reader may detect the presence of a corresponding RF tag included on the vial **250**, or a touch sensor may detect the presence of the vial **250** by coming into contact with it. Other variations are also possible and contemplated.

In block **754**, the sensor **186** may capture the unique identifier of the vial **250**. In some embodiments, the unique identifier may be embodied by an optical representation included on the vial **250**, such as one scannable using an optical sensor. In some embodiments, the unique identifier may be transmitted via radio frequency responsive to an RF tag being placed proximate to an RF reader. In some embodiments, the color of the vial **250**, or some other visual representation, may be captured by sensor **186** of the scent dispenser **132** and used as and/or processed into a unique identifier. As shown in FIG. 13, and an embodiment may use a QR code **1302**, and the sensor **26** may be a scanner configured to scan and interpret the QR code **1302**.

In block **756**, the sensor **186** and/or the controller **188** may process the captured data to identify the vial **250**. Some embodiments, the controller **188** may cooperate with the dispenser management application **160** to decrypt the captured data and determine a unique identifier for the vial. In

US 11,213,601 B2

31

block 758, the controller 188 and/or the dispenser management application 160 may use the unique identifier for the vial 250 to verify the viability of the vial. For example, if the vial 250 is brand-new, the data store 170 may include data reflecting the existence of the vial 250 and that the vial 250 is never been used and are installed in a scent dispenser 132. In another example, the vial 250 has been partially used, the data store 170 will include usage data reflecting that usage and that the vial 250 has never been used to depletion, and as such, will allow for continued use of the vial 250 (e.g., provided in some cases that the scent solution included in the vial 250 is unexpired). In a further example, if the usage data stored in the data store 170 reflects that the vial 250 in use is used to completion, or in other words all of the scent solution have been used, then the dispenser management application 160 and/or the controller 188 may prevent the scent dispenser 132 from dispensing scent from the vial 250. Further, the dispenser management application 160 may detect when a vial 250 might somehow go from the 50% fill level to an 80% fill level based on sensor data received from a vial sensor 322, thus indicating that a user may have filled the vial 250 with additional solution. In this case, since heating the unknown solution could yield harmful effects, the dispenser management application 160 and/or the controller 188 may prevent usage of the vial 250 in the scent dispenser 132.

In block 760, the scent application 108 and/or the dispenser management application 160 may associate the vial 250 with the determined slot 222 of the scent dispenser 132. For example, the dispenser management application 160 may store dispenser data reflecting the installation of scent in the slot 322 and/or associating a unique vial identifier with the slot 222. This information may be used to generate analytics, often in conjunction with a multiplicity of other users, to determine user scent preferences behavior and generate corresponding data visualizations and graphical user interfaces for navigating the analytics.

FIG. 8 is a flowchart of an example method 800 for automatically adjusting the dispensation intensity of a scent dispenser 132 based on the presence of nearby scent dispensers 132.

In block 802, the controller 188 of the first scent dispenser 132 enables an interface 190 of the first scent dispenser 132, and upon doing so, receives in block 804, wireless local area network (WLAN) transmissions from other devices within transmission rate. In block 806, the controller 188 identifies one or more second scent dispensers 132 based on the WLAN transmissions. In some embodiments, the transmission may include identifying data reflecting that the device is a scent dispenser 132 and/or the scent dispenser 132 is actively dispensing. Some embodiments, that identified data may be encrypted, and the controller 188 may decrypt the data for security reasons.

In block 808, the controller 188 of the first scent dispenser 132 may process the signals by broadcasted by the identified second scent dispenser(s) 132 to determine the strength of the signals, and based on the strength of the signals, may determine, in block 810, distance(s) between the second scent dispenser(s) 132 and the first scent dispenser 132.

Based on the distance(s), the controller 188 may, in block 812, adjust an intensity level at which or more scent is being dispensed by the first scent dispenser 132. For example, the controller 188 may have a predefined set of rules correlating scent intensity and a density of scent dispensers 132, and the controller 188 may utilize this data to adjust the intensity level. In a further example, the controller 188 may utilize thresholds reflecting intensity level relative to distance from

32

other scent dispensers 132, and may use the thresholds to adapt scent intensity. In further embodiments, the first scent dispenser 132 may transmit data reflecting the environment including the neighboring second scent dispenser(s) 132 and their dispensing activity, and the dispenser management application 160 may send state settings to one or more of the second scent dispenser(s) 132 to adjust the scent dispensation levels of those dispenser(s) 132. In some instances, sending state settings may include calling functions surfaced by the scent dispenser 132 using various parameters, as discussed elsewhere herein.

FIG. 9 is a flowchart of an example method 900 for adjusting the dispensation intensity of a scent dispenser 132 based on room size. In block 902, the scent application 108 may receive input from the user indicating a room size of a room. For example, the user may input the dimensions of a room using a corresponding interface of the scent application 108 and an input device of the user's computing device 106. In block 904, the scent application 108 may receive input associating the scent dispenser 132 with a particular room. For example, the user, using a corresponding interface of the scent application 108 and an input device of the user's computing device 106, may select a room type from a predefined list of room types and enter a custom name for the room, although other variations are also possible.

In block 906, based on the room size determined in block 902, the dispenser management application 160 may determine a number of vials to use for dispensing scent solution in that room, and may transmit corresponding state settings to the scent dispenser 132. The scent dispenser 132, upon receiving the state settings, may, in block 908, activate the heating elements 196 corresponding to the number of vials determined in block 906. This is advantageous for a larger room which require a scent dispenser 132 to diffuse scent from more than one vial 250 so that the scent level in the room is adequate. This is also advantageous for smaller rooms which may require less scent diffusion, and thus fewer heating elements to be activated.

FIG. 10 is a flowchart of an example method 1000 for controlling operation of scent dispenser(s) based on geolocation data.

In block 1002, a scent application may receive input(s) defining geofence settings for scent dispensers 132 installed on particular premises for one or more users (e.g., as reflected by unique user IDs). For example, the user may input, using a graphical user interface displaying a map, the area of the geofence, which may be represented as an overlay in the graphical user interface.

In block 1004, the scent application 108 may transmit the geofence settings to the dispenser management application 160, which may store the settings as user data in the data store 170 in association with the user(s) (e.g., using the user IDs).

In block 1006, the dispenser management application 160 may receive geolocation data from a location-aware device associated with a particular user ID (e.g., the user's smartphone), such as one associated with the geofence data stored in block 1004. In block 1008, the dispenser management application 160 compares the geo-location data associated with the particular user ID with the geofence settings stored for that particular user ID in the data store 170, and based on the comparison determines whether a geolocation of the user is within the geofence. If the geolocation is not within the geofence, the method 1000 may return to block 1006 to receive updated geo-location data. If the geolocation is within the geofence, the dispenser management application 160 may determine whether the geofence criteria of another

US 11,213,601 B2

33

user ID is associated with a particular user ID in the data store for the same premises already satisfied that geofence criteria and that a scent profile of another user **112** in use (e.g., a first scent is being dispensed by a particular scent dispenser **132** in a particular room the premises according to the settings of that user).

If the determination in block **1010** is negative, the dispenser management application **160** and generate and send state settings based on the scent profile that particular user associated with particular user ID (e.g. as reflected by the user data associated with that particular user ID in the data store **170**), and send the state settings to one or more scent dispensers **132** of the premises associated with a particular user ID so the scent dispensers **132** can be configured according to the settings of that particular user, as reflected by the scent profile that particular user.

If the determination in block **1010** is affirmative, the dispenser management application **160** determines which user has priority in block **1014**, and if the other user (the scent profile is currently in use) has priority, continues to use a scent profile of the other user **1016** (e.g., does not affect the current operation of the scent dispenser(s) **132**) of the premises. In some embodiments, the scent profiles of the particular user and the other user may not conflict for particular premises (e.g., users have selected devices in different rooms for use), in which case both scent profiles may be supported in the conflict resolution may be required. In other words, state settings reflecting the scent profile the particular user can be sent to certain scent dispensers **132** at the premises without affecting the scent dispensation currently occurring within the premises for the other user (e.g., by other scent dispensers **132**).

In some embodiments, the dispenser management application **160** may use the geofence settings stored in block **1004** for automatically turning the scent dispensers **132** of a given premises on or off (active or inactive) based on whether or not a particular user this present at the premises are not. For example, as the user leaves the premises, and the mobile device **106** of the user **112** leaves the geofence, the dispenser management application **162** may transmit signals to the scent dispensers **132** in the premises that are on to become inactive. Conversely, as the user's mobile device reenters the geofence upon returning to the premises, the dispenser management application **162** may transmit signals to the scent dispensers **132** in the premises to reactivate/ wake-up based on the schedule data stored for the scent dispensers **132** in the data store **170**, although other variations are also possible.

In some embodiment, geo-location data associated with a given user, such as GPS data from a user's **112** portable electronic device **106**, can be used to further enhance the fragrance disbursement intelligence of the dispenser. For example, through the use of a low-power GPS mode, the scent application **108** operating on the user's device can register an event with the operating system of that device (e.g., iOS™ or Android™) to be notified when the user leaves the approximate radius of their house and/or neighborhood. Upon receiving that event trigger, remote communication to the device may be established via the dispenser management application **160** and the dispenser **132** may be instructed to shut down all fragrance dispensing. The reverse process may occur when the user returns home.

The method **1000** and corresponding embodiments are advantageous as they can automatically prevent wasted scent usage when the user is away from home (or office), and can be particularly helpful for individuals who are frequently away from the premises or to balance scent dispen-

34

sation in a premises in which multiple users reside. The scent application **108** may further include settings to over-ride operation of the recovery mechanism, and/or adjust the operation thereof, as discusses elsewhere herein.

FIG. **11** is a flowchart of an example method **1100** for scheduling scent dispensation for room(s) of a premises. In block limited **1102**, the scent application **108** receives input, for a given user ID, defining a set schedule for a set installed in a scent dispenser **132** in a room of a premises.

In block **1104**, the scent application **108** may transmit the schedule data to the dispenser management application **160**, which in turn may store the scent schedule in the data store **170** of the server **150** in association with the scent dispenser **132** (and other entities, user, premises, etc.).

In block **1106**, the dispenser management application **160** may utilize the schedule data to monitor operation of the scent dispenser(s) **132** of that premises, and in block **1108**, may detect an event based on the scent schedule. The event may indicate a particular scent dispenser and an action for that scent dispenser.

In block **1110**, if the event indicates to start active dispensation of a scent, dispenser management application **160**, in block **1112**, generates and wirelessly transmits state settings instructing the scent dispenser **132** to dispense the scent, and the controller **188** receives and implements the state settings.

If, in block **1110**, the determination is negative, the method **1100** proceeds to block **1114**, in which the dispenser management application **160** determines whether to cease dispensing of the scent based on the event. If the determination is affirmative, the dispenser management application **160**, in block **1116**, generates and wirelessly transmits state settings instructing the scent dispenser **132** to disable dispensing the scent, and the controller **188** receives and implements the state settings.

If, in block **1114**, the determination is negative, the method **1100** proceeds to block **1118**, in which the dispenser management application **160** determines whether to switch between vials/switch scents. If the determination is affirmative, the dispenser management application **160**, in block **1120**, generates and wirelessly transmits state settings instructing the scent dispenser **132** to switch scents, and the controller **188** receives and implements the state settings (e.g., by deactivating one heating element **196** and activating another heating element **196** for heating a different scent).

Upon completion of blocks **1112**, **1116**, **1118** (assuming a negative determination), and/or **1120**, the method **1100** may return to block **1106** and repeat from there, and/or may exit.

FIG. **12A** is a flowchart of an example method **1200** for activating a scent dispenser **132** based on detected motion. In block **1202**, a motion sensor of the scent dispenser **132** may detect motion in the environment (e.g., room) within range/surrounding the scent dispenser **132**. Responsive to the detected motion, the controller **132** may activate the scent dispenser **132** (e.g. resume dispensing, query for current schedule and dispense according to schedule, await instructions, etc.).

FIG. **12B** is a flowchart of an example method **1250** for using motion detection to control operation of a scent dispenser. In block **1206**, a motion sensor of the scent dispenser **132** may monitor area. The controller **188** may be coupled to the motion sensor and receive motion data reflecting the presence or absence of motion within the area being monitored. In block **1208**, the controller **188** may determine a room to be vacant based on the motion monitoring, which may reflect that there's been no activity in the room for particular period of time (e.g., for a time threshold,

US 11,213,601 B2

35

no motion has been detected by the motion sensor). In block 1210, the controller 188 may suspend dispensing a scent based on determining the room to be vacant.

The foregoing description, for purpose of explanation, has been described with reference to various embodiments and examples. However, the illustrative discussions above are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The various embodiments and examples were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to utilize the innovative technology with various modifications as may be suited to the particular use contemplated. For instance, it should be understood that the technology described herein can be practiced without these specific details in some cases. Further, various systems, devices, and structures are shown in block diagram form in order to avoid obscuring the description. For instance, various implementations are described as having particular hardware, software, and user interfaces. However, the present disclosure applies to any type of computing device that can receive data and commands, and to any peripheral devices providing services.

In some instances, various implementations may be presented herein in terms of algorithms and symbolic representations of operations on data bits within a computer memory. An algorithm is here, and generally, conceived to be a self-consistent set of operations leading to a desired result. The operations are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussion, it is appreciated that throughout this disclosure, discussions utilizing terms such as “processing,” “computing,” “calculating,” “determining,” “displaying,” or the like, refer to the action and methods of a computer system that manipulates and transforms data represented as physical (electronic) quantities within the computer system’s registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

A data processing system suitable for storing and/or executing program code, such as the computing system and/or devices discussed herein, may include at least one processor coupled directly or indirectly to memory elements through a system bus. The memory elements can include local memory employed during actual execution of the program code, bulk storage, and cache memories that provide temporary storage of at least some program code in order to reduce the number of times code must be retrieved from bulk storage during execution. Input or I/O devices can be coupled to the system either directly or through intervening I/O controllers. The data processing system may include an apparatus may be specially constructed for the required purposes, or it may comprise a general-purpose computer selectively activated or reconfigured by a computer program stored in the computer.

36

The foregoing description has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the specification to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the disclosure be limited not by this detailed description, but rather by the claims of this application. As will be understood by those familiar with the art, the specification may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. Likewise, the particular naming and division of the modules, routines, features, attributes, methodologies and other aspects may not be mandatory or significant, and the mechanisms that implement the specification or its features may have different names, divisions, and/or formats.

Furthermore, the modules, routines, features, attributes, methodologies and other aspects of the disclosure can be implemented as software, hardware, firmware, or any combination of the foregoing. The technology can also take the form of a computer program product accessible from a computer-usable or computer-readable medium providing program code for use by or in connection with a computer or any instruction execution system. Wherever a component, an example of which is a module or engine, of the specification is implemented as software, the component can be implemented as a standalone program, as part of a larger program, as a plurality of separate programs, as a statically or dynamically linked library, as a kernel loadable module, as firmware, as resident software, as microcode, as a device driver, and/or in every and any other way known now or in the future. Additionally, the disclosure is in no way limited to implementation in any specific programming language, or for any specific operating system or environment. Accordingly, the disclosure is intended to be illustrative, but not limiting, of the scope of the subject matter set forth in the following claims.

What is claimed is:

1. A fragrance intensity control apparatus, comprising:
 - a first vial bay configured to receive and detachably retain a first vial including a first fragrance solution;
 - a first heating element disposed in the first vial bay and responsive to control data;
 - a first sensor proximate to the first heating element, the first sensor configured to measure a first temperature of the first heating element and to provide a first feedback based on the first temperature; and
 - a controller configured generate the control data to adjust a first intensity of a first fragrance based on the first fragrance solution dispensed from the first vial, the first intensity adjusted by adjusting the first temperature at a first set point of the first heating element to an adjusted temperature at an adjusted set point, the control data based at least in part on the first feedback to maintain the adjusted temperature at the adjusted set point during a diffusion of the first fragrance solution.
2. The fragrance intensity control apparatus, of claim 1, wherein the control data is generated using a proportional-integral-derivative (PID) algorithm.
3. The fragrance intensity control apparatus, of claim 1, wherein the control data is generated using a proportional-integral (PI) algorithm.
4. The fragrance intensity control apparatus, of claim 1, wherein the control data is sent to the first heating element in a pulse-width modulation (PWM) format.

US 11,213,601 B2

37

5. The fragrance intensity control apparatus of claim 1, further comprising:

a second vial bay configured to receive and detachably retain a second vial including a second fragrance solution;

a second heating element disposed in the second vial bay and responsive to the control data;

a second sensor proximate to the second heating element, the second sensor configured to measure a second temperature of the second heating element and to provide a second feedback based on the second temperature; and

the controller further configured generate the control data to adjust a second intensity of a second fragrance based on the second fragrance solution dispensed from the second vial, the second intensity adjusted by the second temperature of the second heating element, the control data based in part on the second feedback.

6. The fragrance intensity control apparatus of claim 5, further comprising:

a switch configured to dispense one or more of the first fragrance solution from the first vial and the second fragrance solution from the second vial based on the control data from the controller.

7. The fragrance intensity control apparatus of claim 1, wherein the controller generates the control data based at least in part on defined intensity requirements for a type of room.

8. The fragrance intensity control apparatus of claim 1, wherein the controller generates the control data at least based in part on temperature sensitivity of the first fragrance solution.

9. The fragrance intensity control apparatus of claim 1, wherein the controller is further configured to receive a first setting for the first intensity over a network from a management server.

10. The fragrance intensity control apparatus of claim 1, wherein the controller is further configured to a first setting for the first intensity over a network from a user device.

11. The fragrance intensity control apparatus of claim 1, wherein the controller is further configured to:

receive signals indicative of motion in a room serviced by the fragrance intensity control apparatus;

reduce the first intensity in response to the signals indicating inactivity in the room; and

restore the first intensity in response to the signals indicating activity in the room.

12. The fragrance intensity control apparatus of claim 1, wherein the controller is further configured to:

receive signals indicative of another adjacent fragrance intensity control apparatus; and

adjust the first intensity based on the signals indicating a concurrent dispensing of an adjacent fragrance.

13. A method, comprising:

receiving and detachably retaining a first vial including a first fragrance solution in a first vial bay including a first heating element responsive to control data;

measuring by a first sensor proximate the first heating element a first temperature of the first heating element;

generating a first feedback based on the first temperature; and

generating by the control data to adjust a first intensity of a first fragrance based on the first fragrance solution dispensed from the first vial, the first intensity being

38

adjusted by changing the first temperature at a first set point of the first heating element to an adjusted temperature at an adjusted set point, the control data based at least in part on the first feedback to maintain the adjusted temperature at the adjusted set point during a diffusion of the first fragrance solution.

14. The method, of claim 13, wherein the generating the control data is based on a proportional-integral-derivative (PID) algorithm.

15. The method, of claim 13, wherein the generating the control data is based on a proportional-integral (PI) algorithm.

16. The method, of claim 13, further comprising sending the control data to the first heating element in a pulse-width modulation (PWM) format.

17. The method of claim 13, further comprising:

receiving and detachably retaining a second vial including a second fragrance solution in a second vial bay including a second heating element responsive to the control data;

measuring by a second sensor proximate the second heating element a second temperature of the second heating element;

generating a second feedback based on the second temperature; and

generating the control data to adjust a second intensity of a second fragrance based on the second fragrance solution dispensed from the second vial, the second intensity based on the second temperature of the second heating element, the control data based in part on the second feedback.

18. The method of claim 17, further comprising:

dispensing one or more of the first fragrance solution from the first vial and the second fragrance solution from the second vial based on the control data.

19. The method of claim 13, further comprising:

receiving signals indicative of motion in a room;

in response to the signals indicating inactivity in the room, reducing the first intensity; and

in response to the signals indicating activity in the room, restoring the first intensity.

20. A apparatus, comprising:

means for receiving and detachably retaining a first vial including a first fragrance solution in a first vial bay including a first heating element responsive to control data;

means for measuring by a first sensor proximate the first heating element a first temperature of the first heating element;

means for generating a first feedback based on the first temperature; and

means for generating the control data to adjust a first intensity of a first fragrance based on the first fragrance solution dispensed from the first vial, the first intensity being adjusted by adjusting the first temperature at a first set point of the first heating element to an adjusted temperature at an adjusted set point, the control data based at least in part on the first feedback to maintain the adjusted temperature at the adjusted set point during a diffusion of the first fragrance solution.

* * * * *